

CL06, CL07, CL17, CL18 series

Designing your lighting solutions





CL06 Series




Round and Square shape design ,meet your diversified demand and your indoor lighting design styles.


CL06 series




KAS-CL06R-308F
Power: 8W/10W
Cutout: 80-85mm
Height: 100mm




KAS-CL06R-415F
Power: 15W/20W
Cutout: 105-110mm
Height: 119mm




KAS-CL06R-430F
Power: 30W
Cutout: 105-110mm
Height: 130mm




KAS-CL06R-308T
Power: 8W/10W
Cutout: 80-85mm
Height: 100mm









KAS-CL06R-415T
Power: 15W/20W
Cutout: 105-110mm
Height: 119mm




KAS-CL06R-430T
Power: 30W
Cutout: 105-110mm
Height: 130mm




KAS-CL15R-O-3F

Model	KAS-CL06R-308F	KAS-CL06R-415F	KAS-CL06R-430F		KAS-CL06R-308T	KAS-CL06R -415T	KAS-CL06R-430T
Product Photo							
Dimension(mm)							
Cutout(mm)	80-85	105-110	105-110		80-85	105-110	105-110
Wattage	8W/10W	15W/20W	30W		8W/10W	15W/20W	30W
CCT	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K		2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K
CRI	>90	>90	>90		>90	>90	>90
Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°/60°	15°/20°/30°/36°/45°		15°/24°/30°/36°	15°/24°/30°/36°/60°	15°/20°/30°/36°/45°
Lumen	641-752LM	997-1523LM	2023-2148LM		641-752LM	997-1523LM	2023-2148LM
IP	IP20	IP20	IP20		IP20	IP20	IP20
Dimming	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI		TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI
Colour	White+Iron gray	White+Iron gray	White+Iron gray		White+Iron gray	White+Iron gray	White+Iron gray


KAS-CL06R-3F

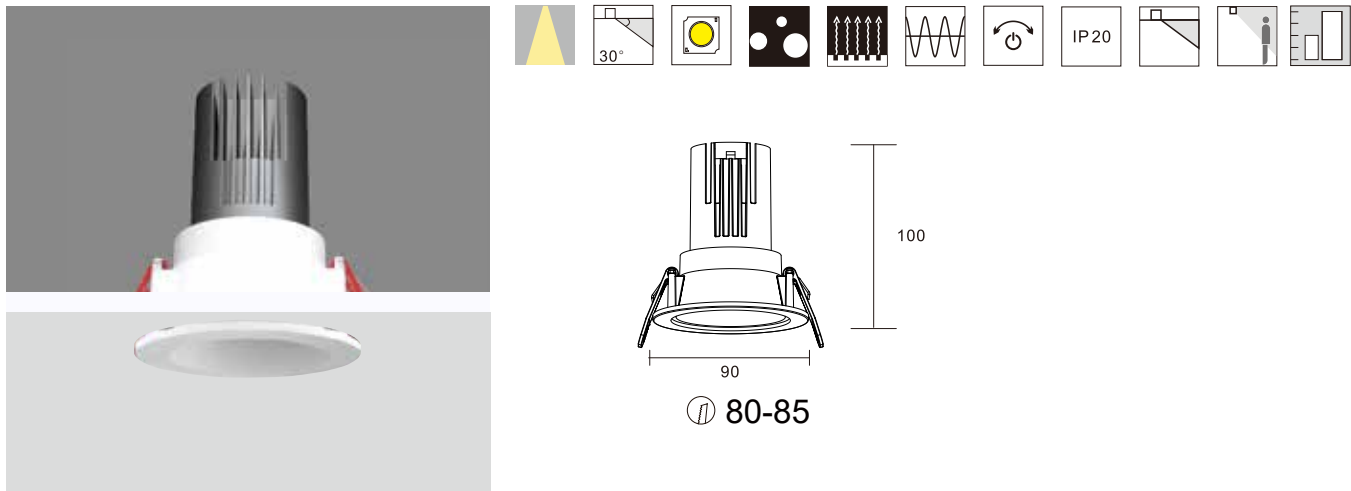


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
KAS-CL06R-308F	8W	34V	200mA	90	2700K	15°	773lm	588lm	ON-OFF
						24°	773lm	516lm	TRIAC
						30°	773lm	594lm	1-10V
						36°	773lm	501lm	DALI
KAS-CL06R-308T	8W	34V	200mA	90	3000K	15°	812lm	618lm	ON-OFF
						24°	812lm	543lm	TRIAC
						30°	812lm	625lm	1-10V
						36°	812lm	527lm	DALI
	8W	34V	200mA	90	4000K	15°	862lm	656lm	ON-OFF
						24°	862lm	576lm	TRIAC
						30°	862lm	664lm	1-10V
						36°	862lm	559lm	DALI

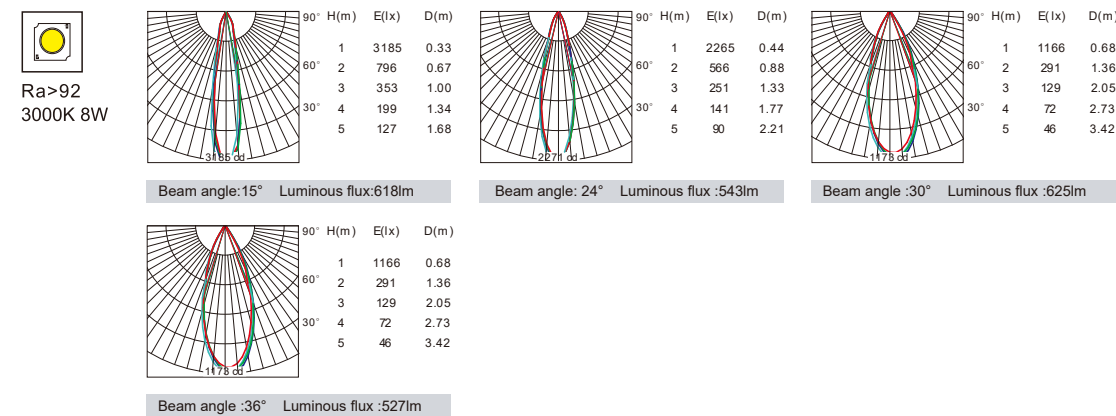


KAS-CL06R-3T

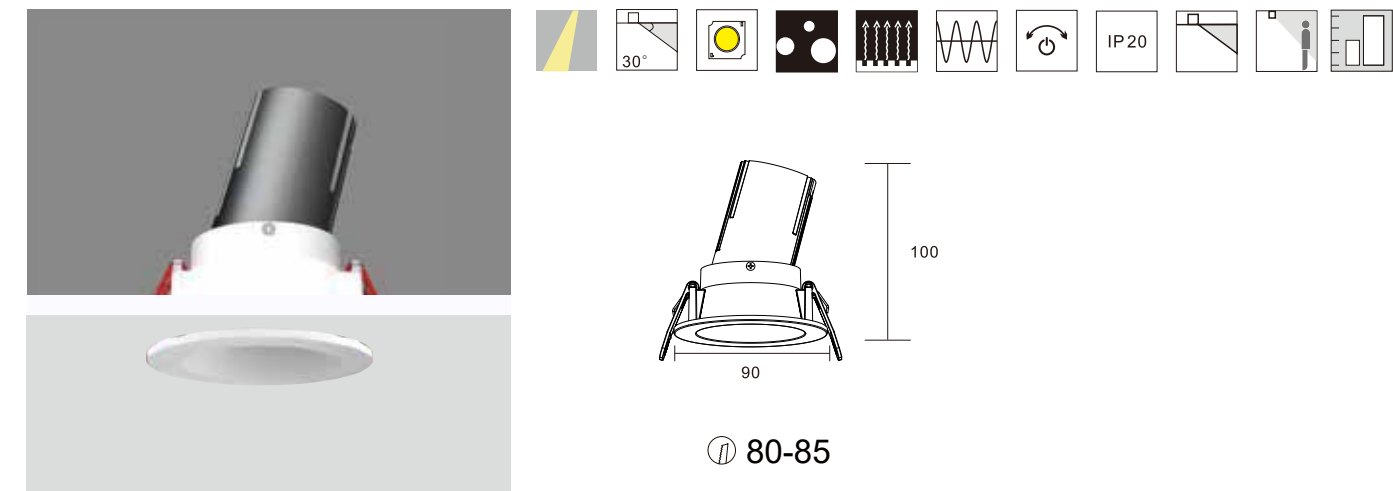


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
KAS-CL06R-310F	10W	34V	250mA	90	2700K	15°	965lm	714lm	ON-OFF
						24°	965lm	664lm	TRIAC
						30°	965lm	626lm	1-10V
						36°	965lm	582lm	DALI
KAS-CL06R-310T	10W	34V	250mA	90	3000K	15°	1015lm	752lm	ON-OFF
						24°	1015lm	699lm	TRIAC
						30°	1015lm	659lm	1-10V
						36°	1015lm	613lm	DALI
	10W	34V	250mA	90	4000K	15°	1077lm	797lm	ON-OFF
						24°	1077lm	741lm	TRIAC
						30°	1077lm	699lm	1-10V
						36°	1077lm	650lm	DALI

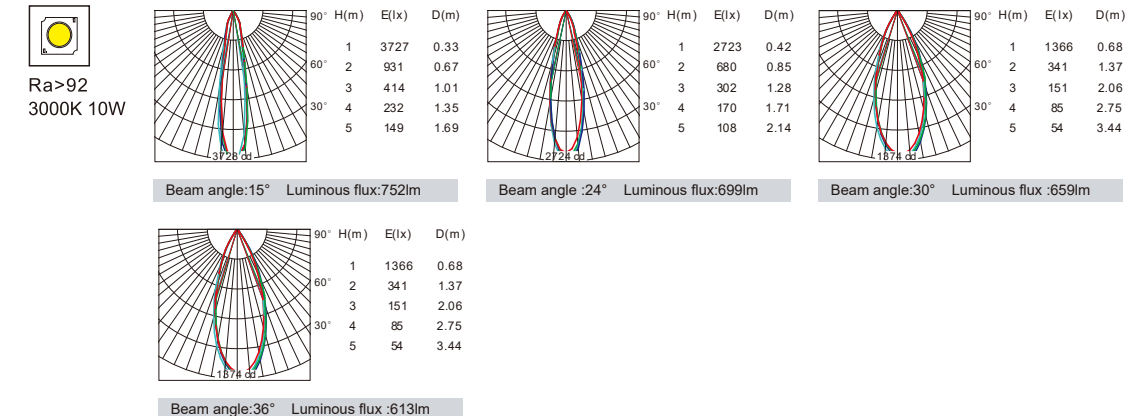


KAS-CL06R-3F

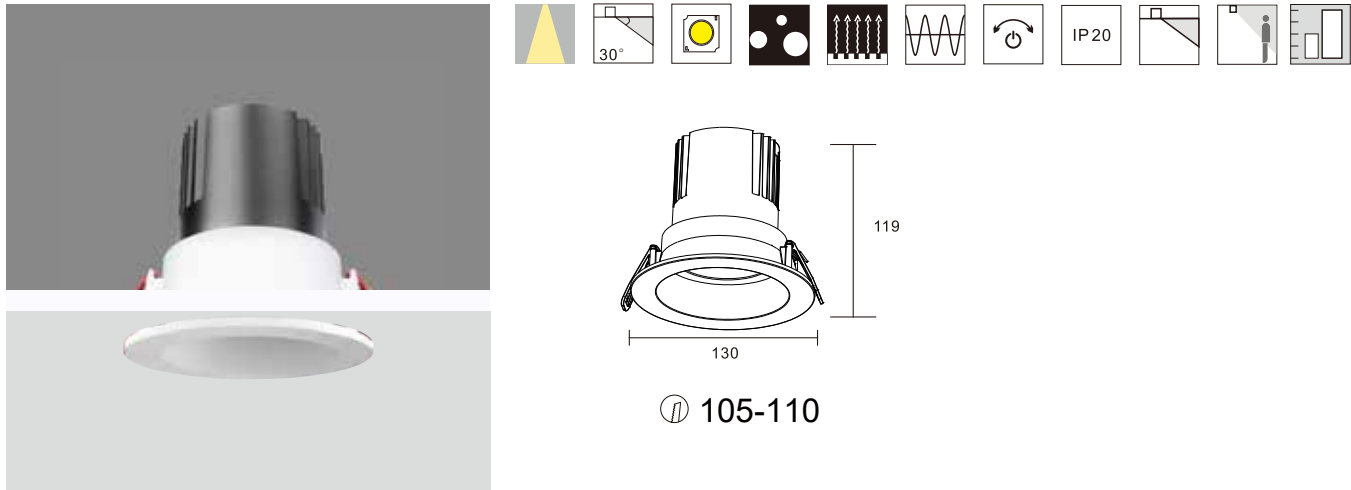


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
KAS-CL06R-315F	15W	34V	350mA	90	2700K	15°	1314lm	1168lm	ON-OFF TRIAC 1-10V DALI
						24°	1314lm	1152lm	
						30°	1314lm	1102lm	
						36°	1314lm	1130lm	
						60°	1314lm	1189lm	
KAS-CL06R-315T	15W	34V	350mA	90	3000K	15°	1383lm	1230lm	ON-OFF TRIAC 1-10V DALI
						24°	1383lm	1213lm	
						30°	1383lm	1160lm	
						36°	1383lm	1190lm	
						60°	1383lm	1252lm	
	15W	34V	350mA	90	4000K	15°	1467lm	1304lm	ON-OFF TRIAC 1-10V DALI
						24°	1467lm	1286lm	
						30°	1467lm	1230lm	
						36°	1467lm	1262lm	
						60°	1467lm	1328lm	

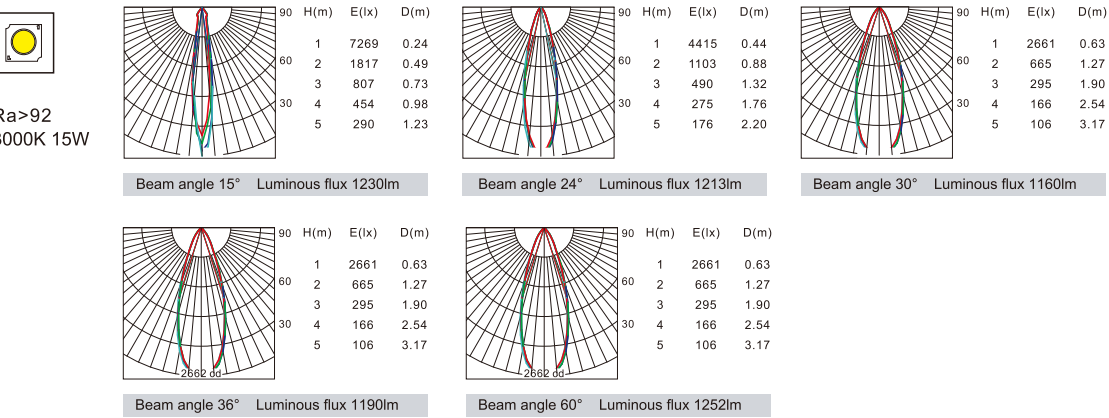


KAS-CL06R-3T

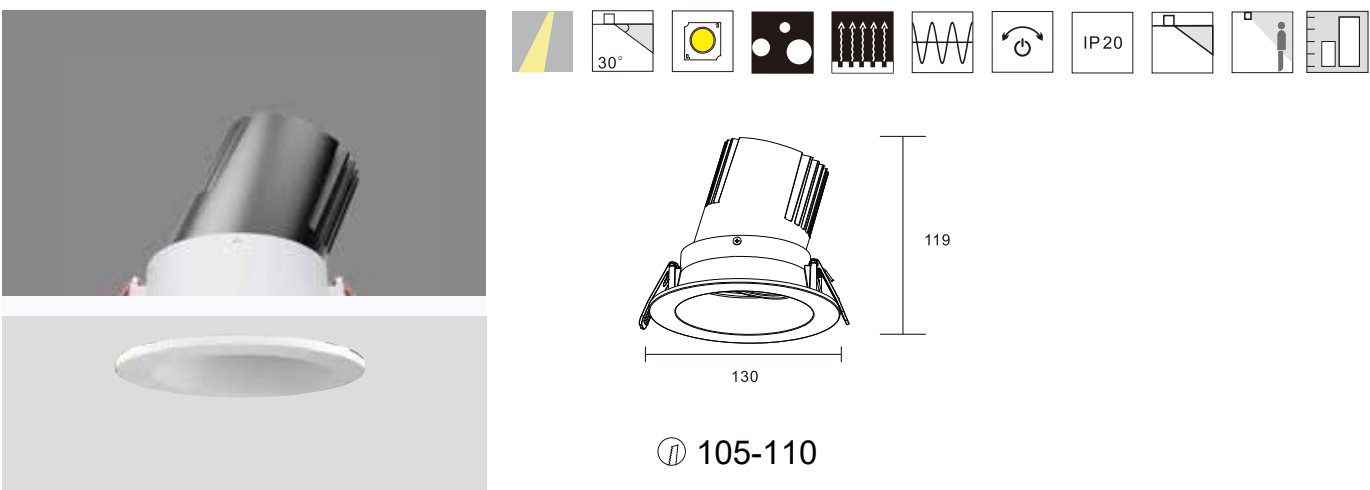


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
KAS-CL06R-320F	20W	34V	500mA	90	2700K	15°	1877lm	1237lm	ON-OFF TRIAC 1-10V DALI
						24°	1877lm	1241lm	
						30°	1877lm	1213lm	
						36°	1877lm	1187lm	
						60°	1877lm	1091lm	
KAS-CL06R-320T	20W	34V	500mA	90	3000K	15°	1975lm	1302lm	ON-OFF TRIAC 1-10V DALI
						24°	1975lm	1306lm	
						30°	1975lm	1277lm	
						36°	1975lm	1250lm	
						60°	1975lm	1149lm	
	20W	34V	500mA	90	4000K	15°	2095lm	1381lm	ON-OFF TRIAC 1-10V DALI
						24°	2095lm	1385lm	
						30°	2095lm	1354lm	
						36°	2095lm	1325lm	
						60°	2095lm	1218lm	

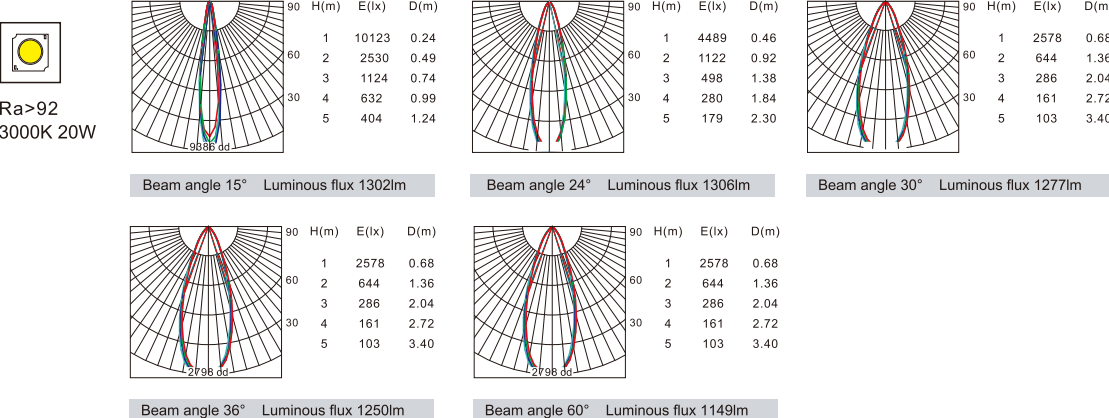


KAS-CL06R-4F

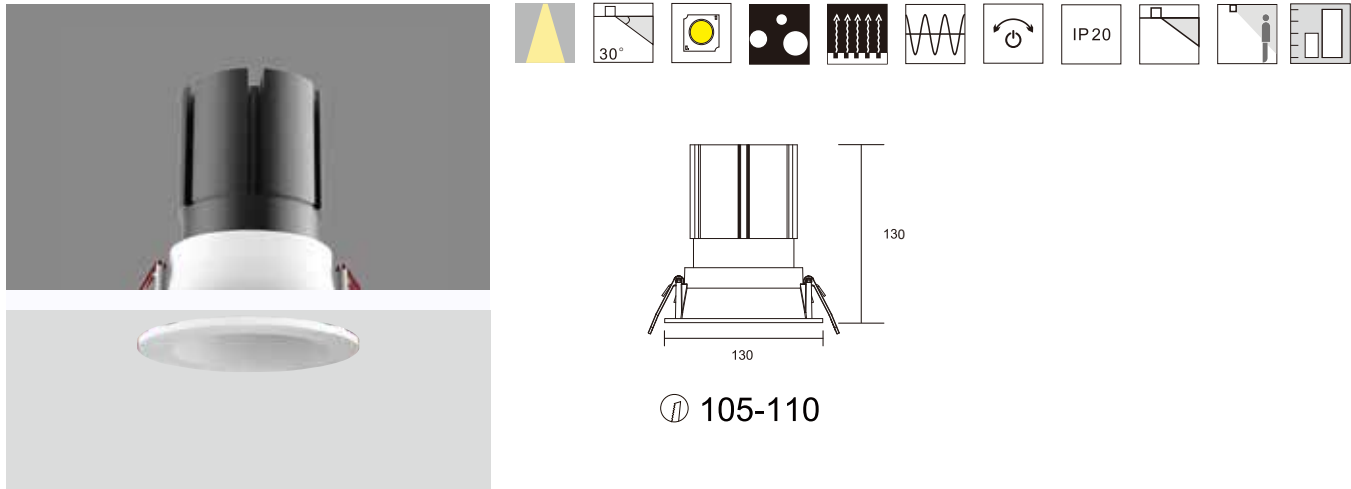


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	KAS-CL06R-430F 30W	34V	700mA	90	2700K	15°	2737lm	2028lm	ON-OFF TRIAC 1-10V DALI
						24°	2737lm	2004lm	
						30°	2737lm	2008lm	
						36°	2737lm	1905lm	
						60°	2737lm	2200lm	
	30W	34V	700mA	90	3000K	15°	2876lm	2131lm	ON-OFF TRIAC 1-10V DALI
						24°	2876lm	2106lm	
						30°	2876lm	2110lm	
						36°	2876lm	2002lm	
						60°	2876lm	2312lm	
	30W	34V	700mA	90	4000K	15°	3052lm	2261lm	ON-OFF TRIAC 1-10V DALI
						24°	3052lm	2234lm	
						30°	3052lm	2239lm	
						36°	3052lm	2124lm	
						60°	3052lm	2453lm	

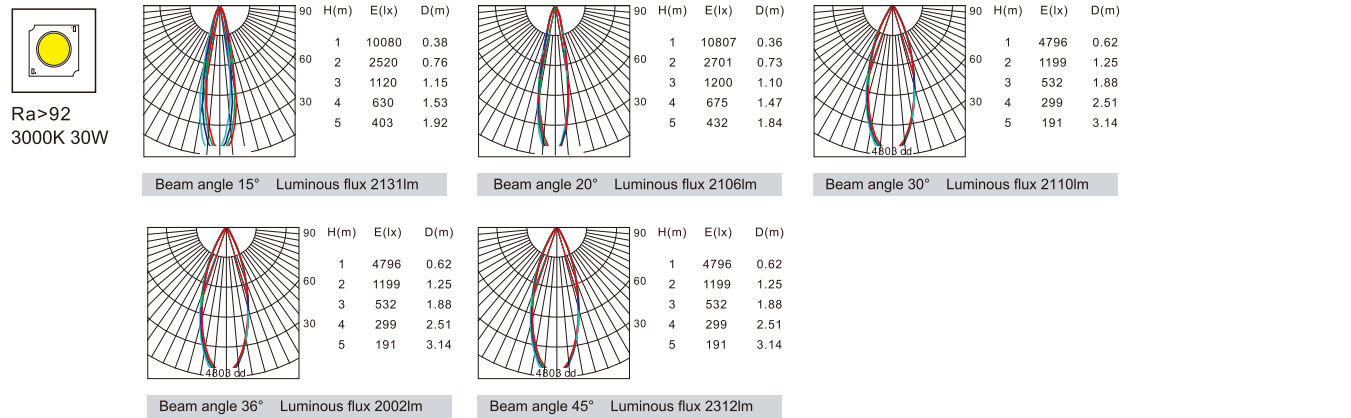


KAS-CL06R-4T

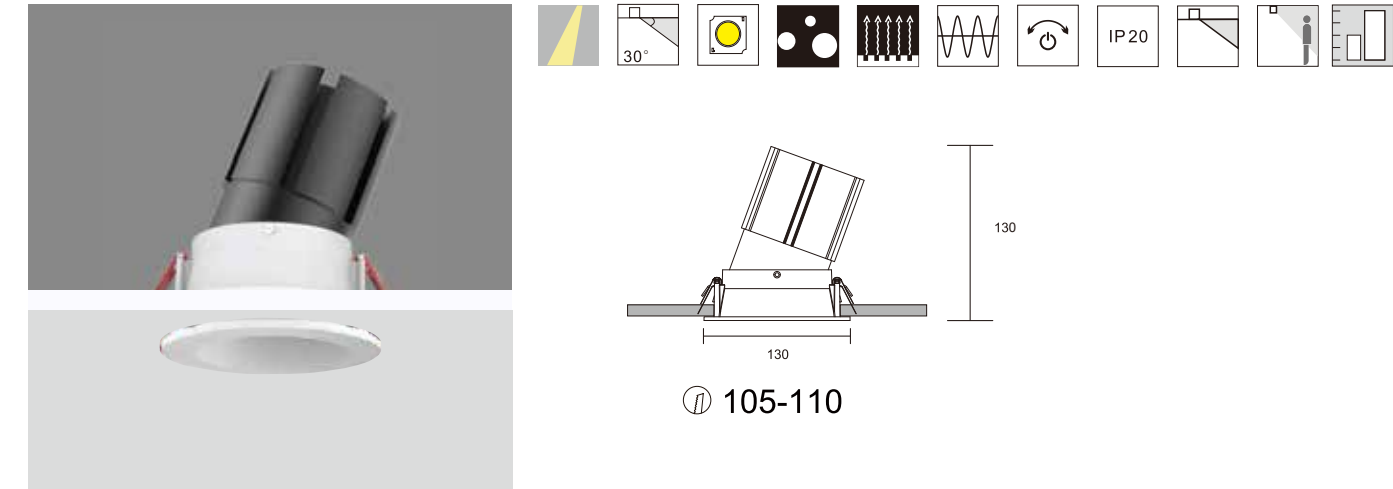

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	KAS-CL06R-430T 30W	34V	700mA	90	2700K	15°	2737lm	2028lm	ON-OFF TRIAC 1-10V DALI
						24°	2737lm	2004lm	
						30°	2737lm	2008lm	
						36°	2737lm	1905lm	
						60°	2737lm	2200lm	
	30W	34V	700mA	90	3000K	15°	2876lm	2131lm	ON-OFF TRIAC 1-10V DALI
						24°	2876lm	2106lm	
						30°	2876lm	2110lm	
						36°	2876lm	2002lm	
						60°	2876lm	2312lm	
	30W	34V	700mA	90	4000K	15°	3052lm	2261lm	ON-OFF TRIAC 1-10V DALI
						24°	3052lm	2234lm	
						30°	3052lm	2239lm	
						36°	3052lm	2124lm	
						60°	3052lm	2453lm	

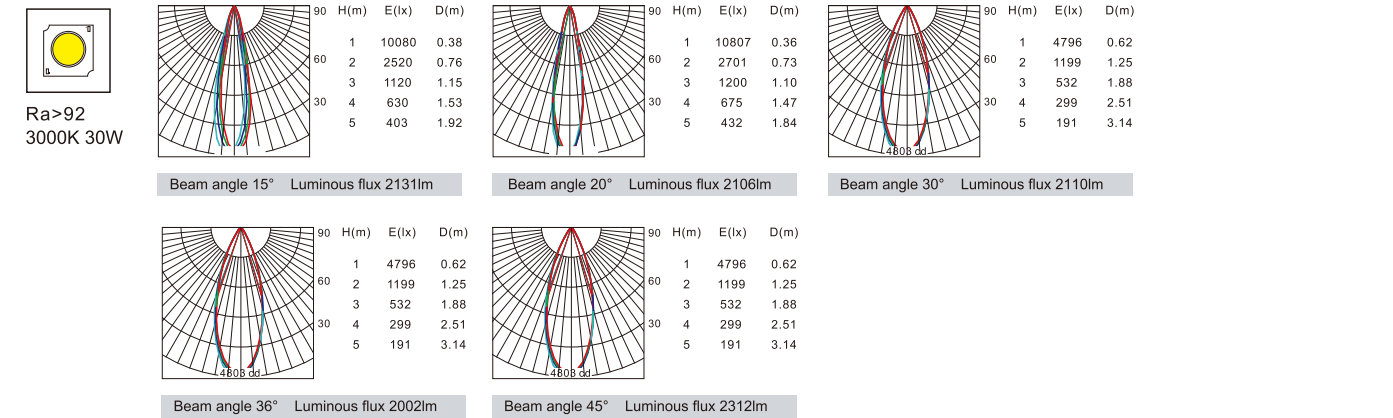

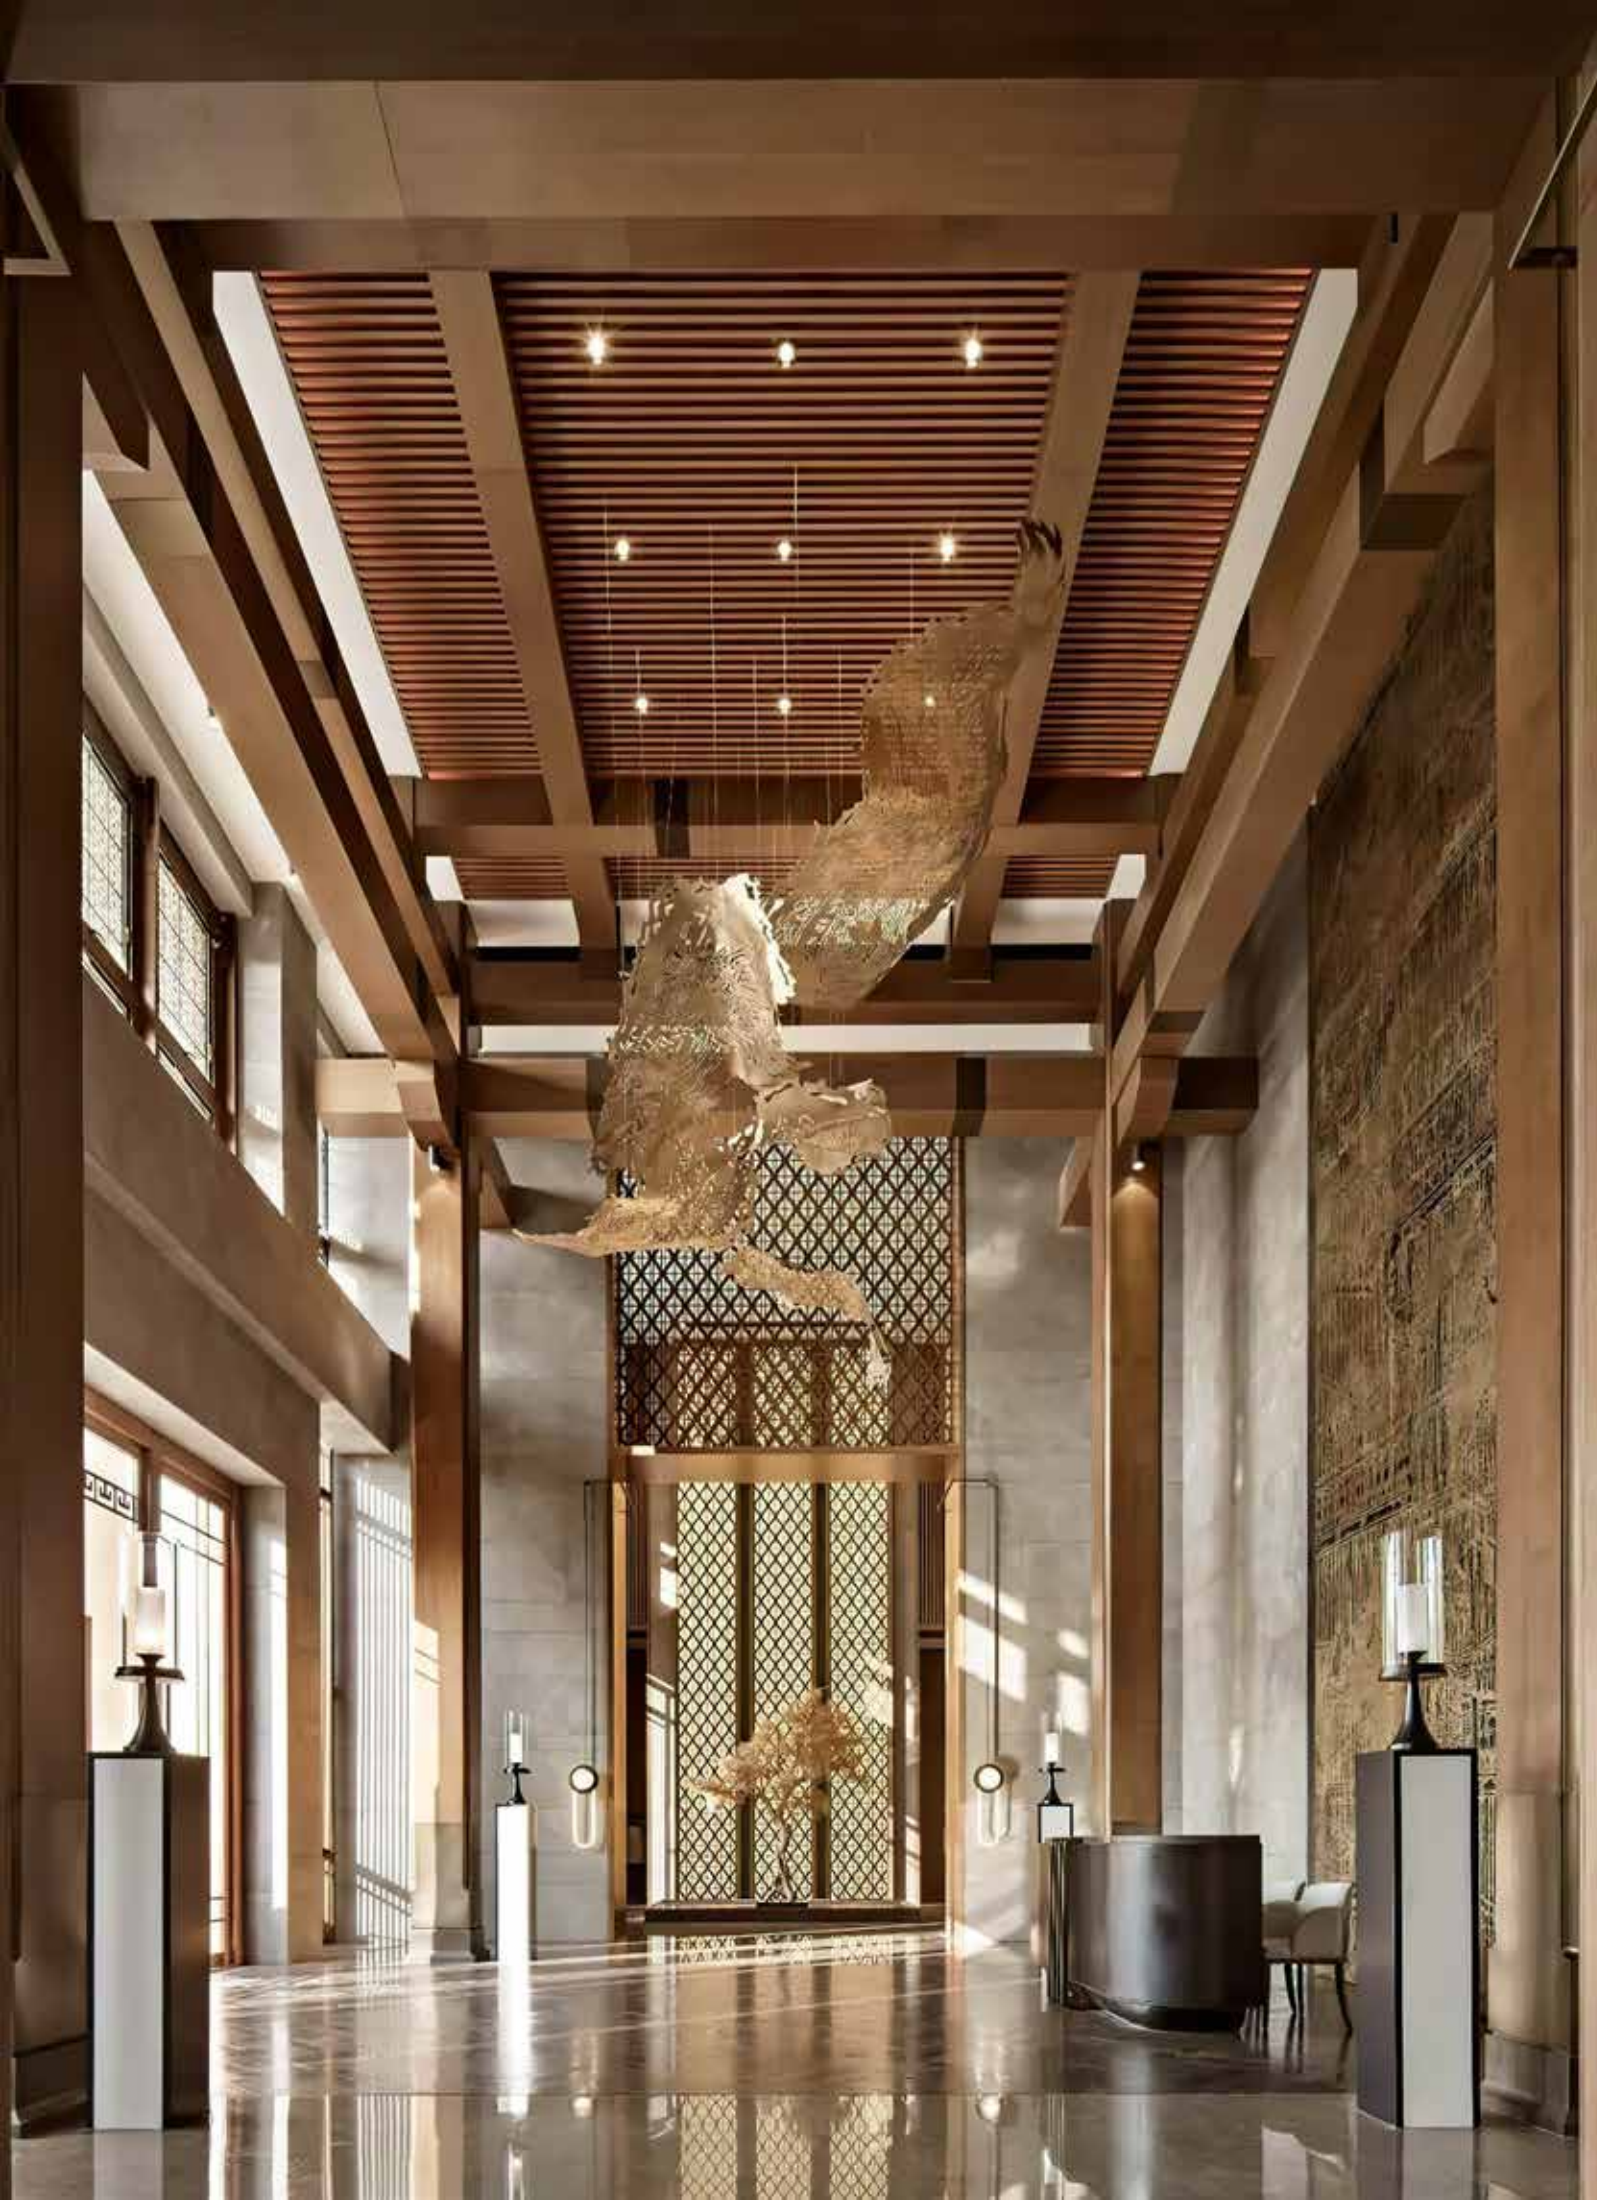

CL07 Series Downlight

Round and Square shape design ,meet your diversified demand and your indoor lighting design styles.

CL07 series



KAS-CL07R-3F

Power: 8W/10W
Cutout: 80*80mm
Height: 100mm



KAS-CL07R-4F

Power: 15W/20W
Cutout: 105*105mm
Height: 119mm



KAS-CL07R-4F

Power: 30W
Cutout: 105*105mm
Height: 130mm



KAS-CL07R-3T

Power: 8W/10W
Cutout: 80*80mm
Height: 100mm




KAS-CL07R-4T

Power: 15W/20W
Cutout: 105*105mm
Height: 119mm




KAS-CL07R-4T


Power: 30W
Cutout: 105*105mm
Height: 130mm




80*80




105*105




105*105



80*80



105*105




105*105


CL07 series

Model	KAS-CL07R-308F	KAS-CL07R-415F	KAS-CL07R-430F		KAS-CL07R-308T	KAS-CL07R -415T	KAS-CL07R-430T
Product Photo							
Dimension(mm)							
Cutout(mm)	80*80	105*105	105*105		80*80	105*105	105*105
Wattage	8W/10W	15W/20W	30W		8W/10W	15W/20W	30W
CCT	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K		2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K
CRI	>90	>90	>90		>90	>90	>90
Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°/60°	15°/24°/36°/50°		15°/24°/30°/36°	15°/24°/30°/36°/60°	15°/24°/36°/50°
Lumen	501-797LM	1101-1185LM	1968-2239LM		501-797LM	1101-1185LM	1968-2239LM
IP	IP20	IP20	IP20		IP20	IP20	IP20
Dimming	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI		TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI
Colour	White+Iron gray	White+Iron gray	White+Iron gray		White+Iron gray	White+Iron gray	White+Iron gray


KAS-CL07R-3F

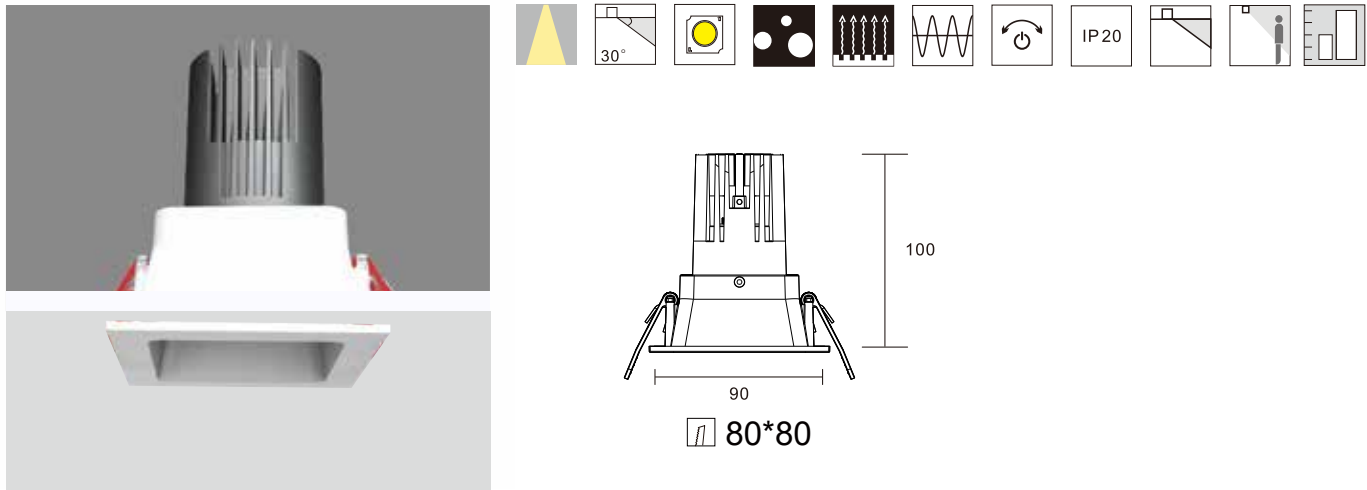


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
KAS-CL07R-308F	8W	34V	200mA	90	2700K	15°	773lm	588lm	ON-OFF
						24°	773lm	516lm	TRIAC
						30°	773lm	594lm	1-10V
						36°	773lm	501lm	DALI
KAS-CL07R-308T	8W	34V	200mA	90	3000K	15°	812lm	618lm	ON-OFF
						24°	812lm	543lm	TRIAC
						30°	812lm	625lm	1-10V
						36°	812lm	527lm	DALI
	8W	34V	200mA	90	4000K	15°	862lm	656lm	ON-OFF
						24°	862lm	576lm	TRIAC
						30°	862lm	664lm	1-10V
						36°	862lm	559lm	DALI

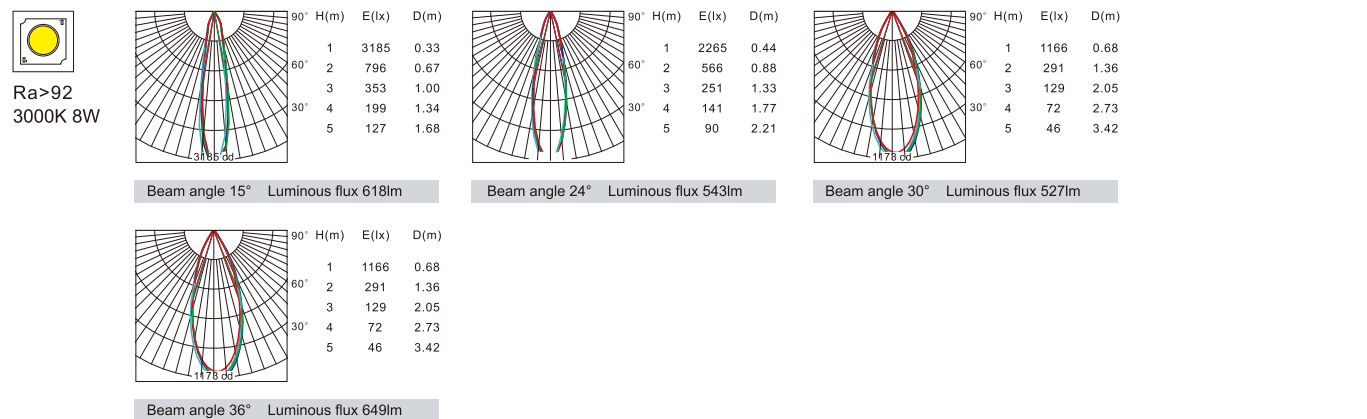


KAS-CL07R-3T

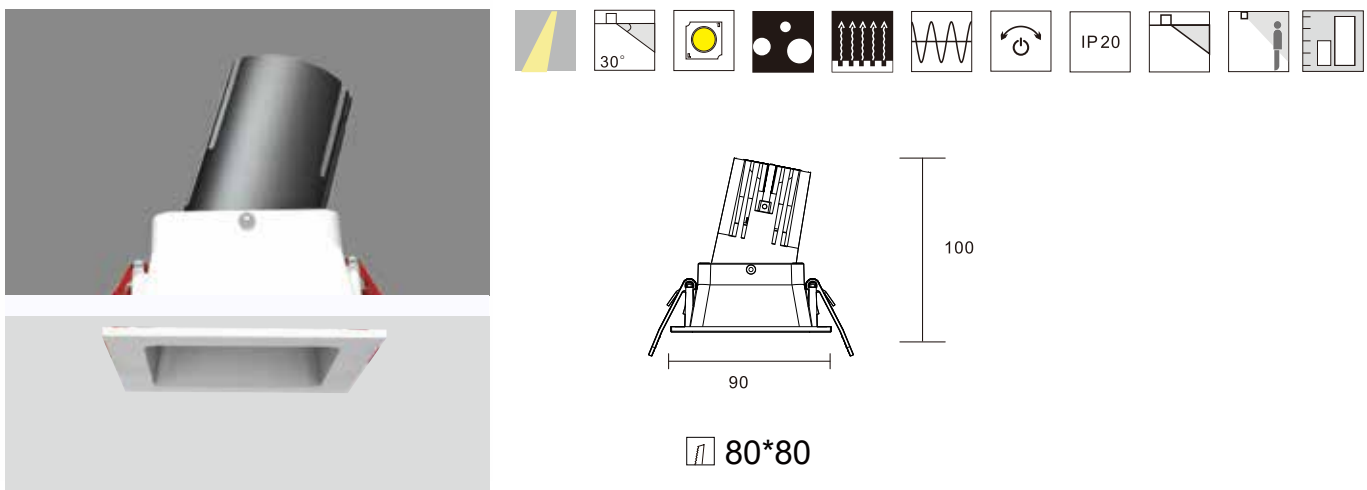


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
KAS-CL07R-310F	10W	34V	250mA	90	2700K	15°	965lm	714lm	ON-OFF
						24°	965lm	664lm	TRIAC
						30°	965lm	626lm	1-10V
						36°	965lm	582lm	DALI
KAS-CL07R-310T	10W	34V	250mA	90	3000K	15°	1015lm	752lm	ON-OFF
						24°	1015lm	699lm	TRIAC
						30°	1015lm	659lm	1-10V
						36°	1015lm	613lm	DALI
	10W	34V	250mA	90	4000K	15°	1077lm	797lm	ON-OFF
						24°	1077lm	741lm	TRIAC
						30°	1077lm	699lm	1-10V
						36°	1077lm	650lm	DALI

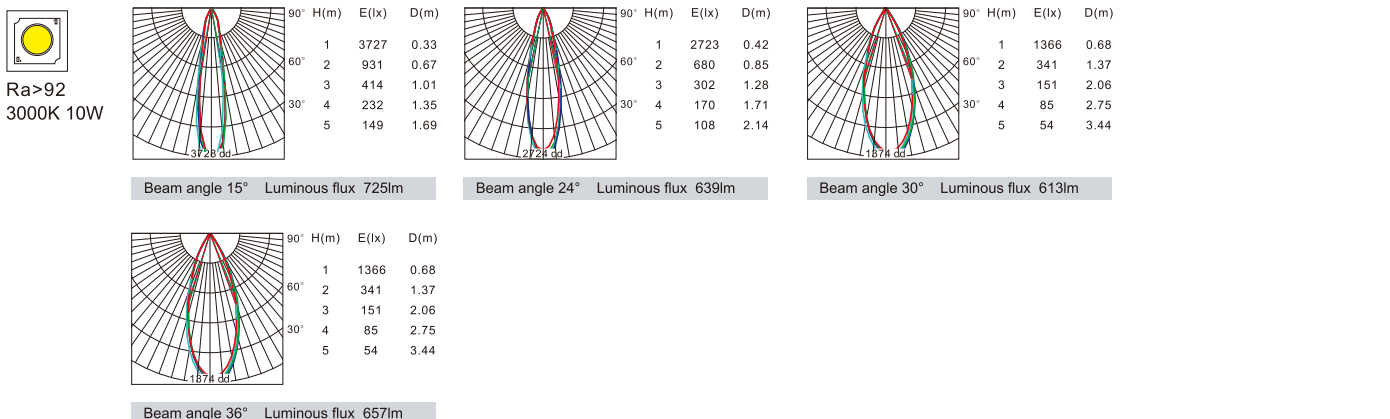


KAS-CL07R-4F

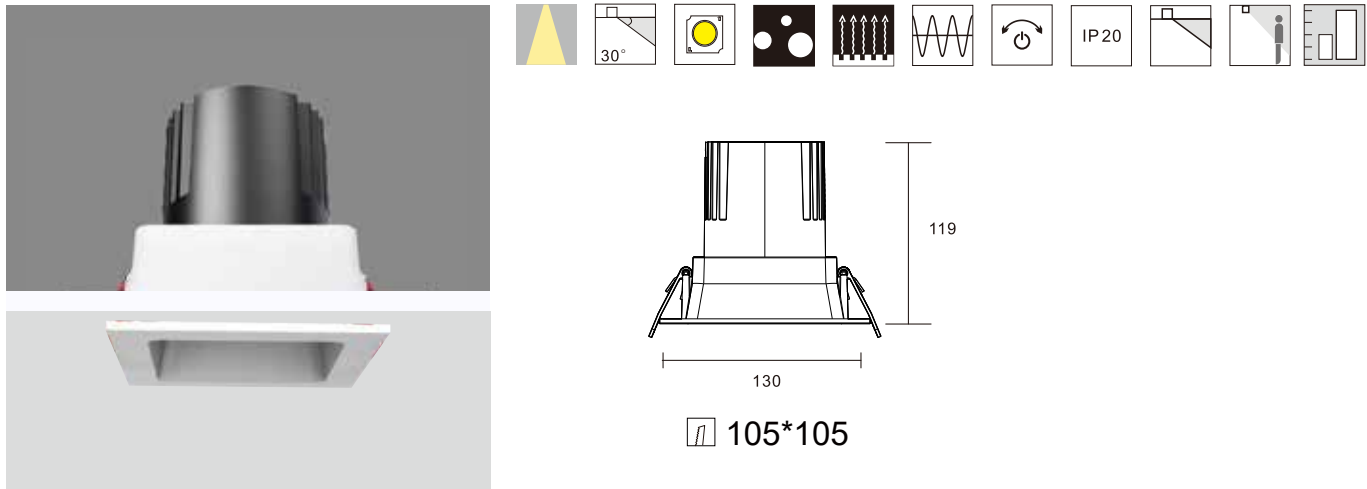


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	KAS-CL07R-415F	15W	34V	350mA	90	2700K	15°	1314lm	ON-OFF TRIAC 1-10V DALI
							24°	1314lm	
							30°	1314lm	
							36°	1314lm	
							60°	1314lm	
	KAS-CL07R-415T	15W	34V	350mA	90	3000K	15°	1383lm	ON-OFF TRIAC 1-10V DALI
							24°	1383lm	
							30°	1383lm	
							36°	1383lm	
							60°	1383lm	
		15W	34V	350mA	90	4000K	15°	1467lm	ON-OFF TRIAC 1-10V DALI
							24°	1467lm	
							30°	1467lm	
							36°	1467lm	
							60°	1467lm	

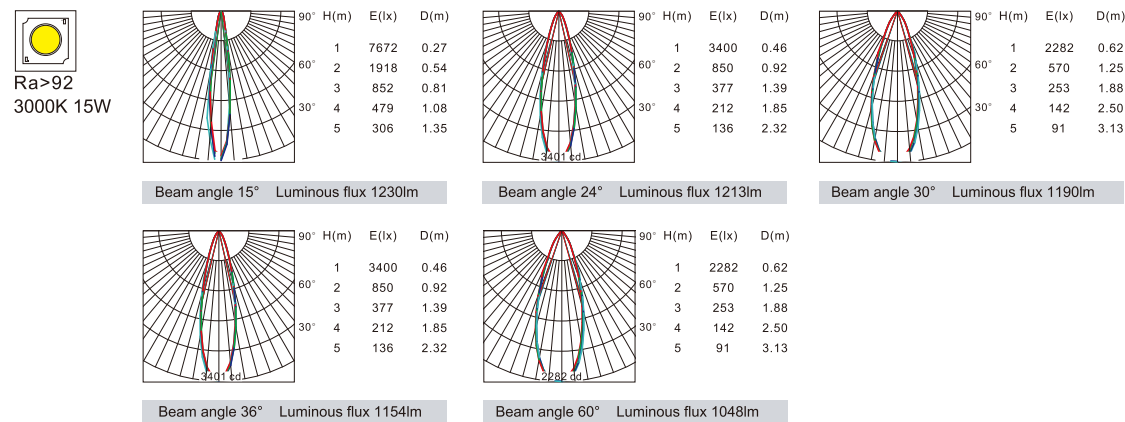


KAS-CL07R-4T

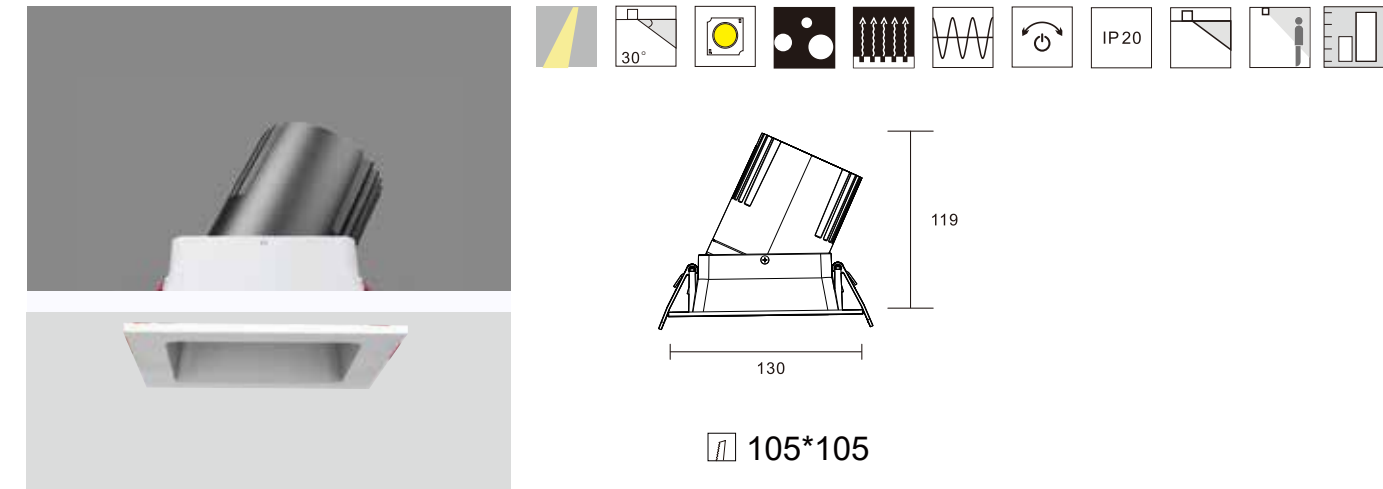


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	KAS-CL07R-420F	20W	34V	500mA	90	2700K	15°	1877lm	ON-OFF TRIAC 1-10V DALI
							24°	1877lm	
							30°	1877lm	
							36°	1877lm	
							60°	1877lm	
	KAS-CL07R-420T	20W	34V	500mA	90	3000K	15°	1975lm	ON-OFF TRIAC 1-10V DALI
							24°	1975lm	
							30°	1975lm	
							36°	1975lm	
							60°	1975lm	
		20W	34V	500mA	90	4000K	15°	2095lm	ON-OFF TRIAC 1-10V DALI
							24°	2095lm	
							30°	2095lm	
							36°	2095lm	
							60°	2095lm	

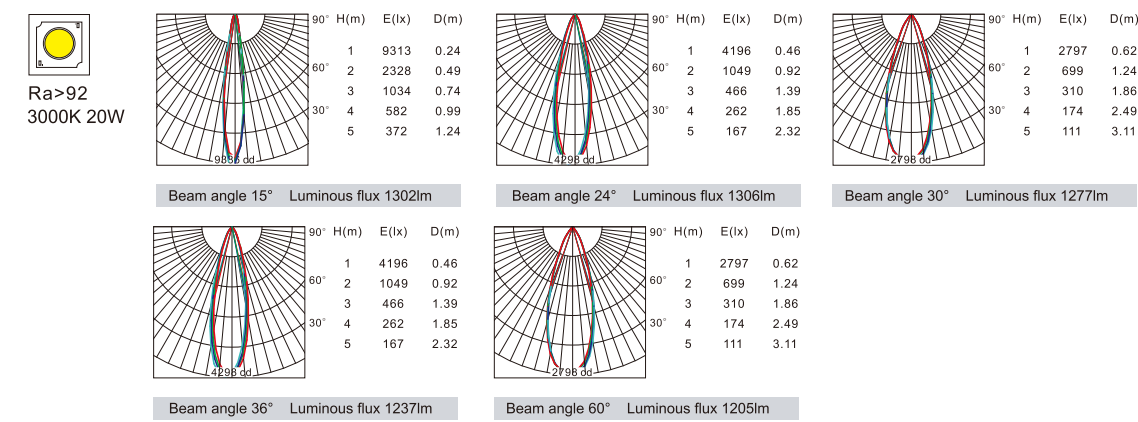


KAS-CL07R-4F

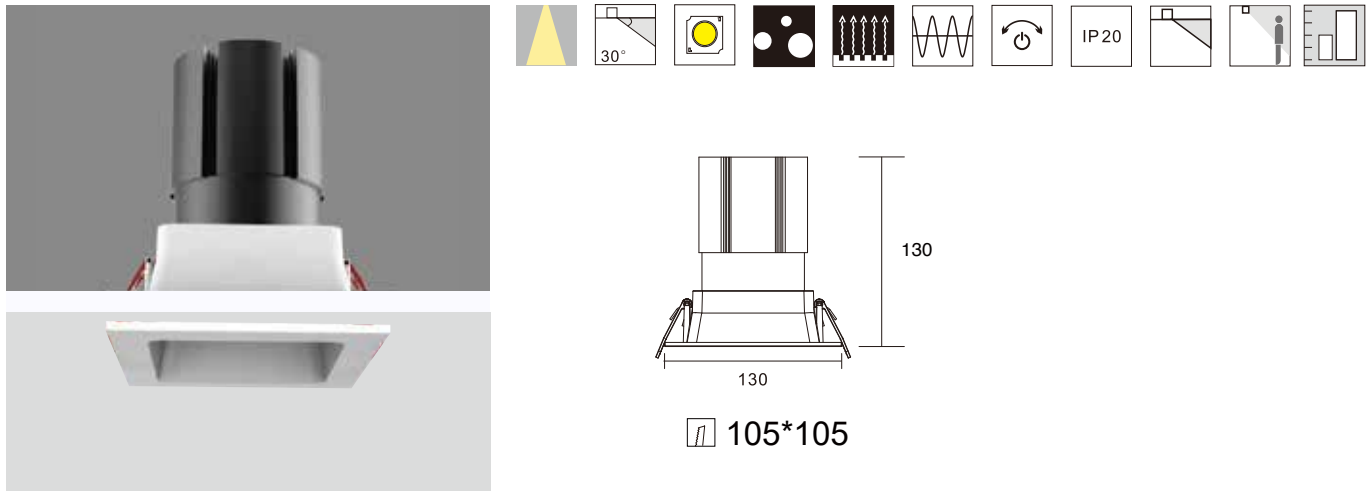


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 KAS-CL07R-430F	30W	34V	700mA	90	2700K	15°	2737lm	2004lm	ON-OFF
						24°	2737lm	1968lm	TRIAC
						36°	2737lm	2008lm	1-10V
						50°	2737lm	2000lm	DALI
						15°	2876lm	2106lm	ON-OFF
	30W	34V	700mA	90	3000K	24°	2876lm	2068lm	TRIAC
						36°	2876lm	2110lm	1-10V
						50°	2876lm	2102lm	DALI
						15°	3052lm	2234lm	ON-OFF
						24°	3052lm	2194lm	TRIAC
	30W	34V	700mA	90	4000K	36°	3052lm	2239lm	1-10V
						50°	3052lm	2230lm	DALI

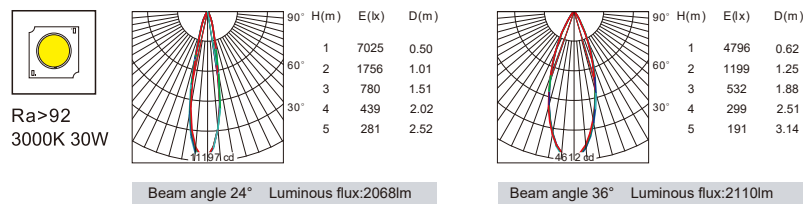

KAS-CL07R-4T

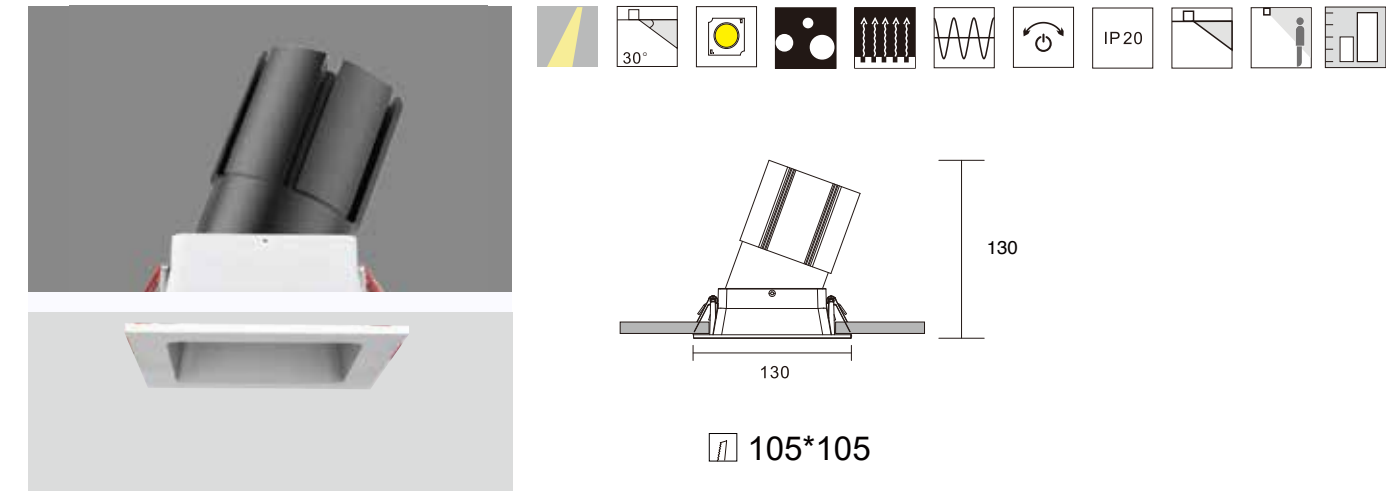

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 KAS-CL07R-430T	30W	34V	700mA	90	2700K	15°	2737lm	2004lm	ON-OFF
						24°	2737lm	1968lm	TRIAC
						36°	2737lm	2008lm	1-10V
						50°	2737lm	2000lm	DALI
						15°	2876lm	2106lm	ON-OFF
	30W	34V	700mA	90	3000K	24°	2876lm	2068lm	TRIAC
						36°	2876lm	2110lm	1-10V
						50°	2876lm	2102lm	DALI
						15°	3052lm	2234lm	ON-OFF
						24°	3052lm	2194lm	TRIAC
	30W	34V	700mA	90	4000K	36°	3052lm	2239lm	1-10V
						50°	3052lm	2230lm	DALI

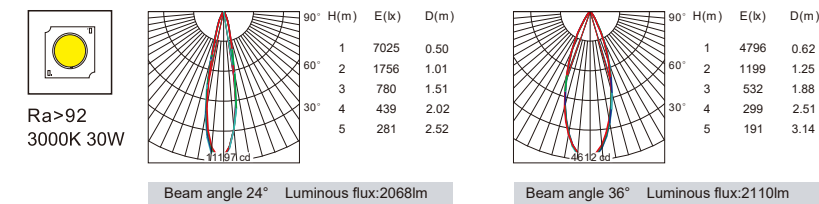





CL08 Series




Special shining lights is the characteristic of this flat face ring downlight series. Combining different sizes in one uniform style, meets your multiple demands.


CL08 Flat series

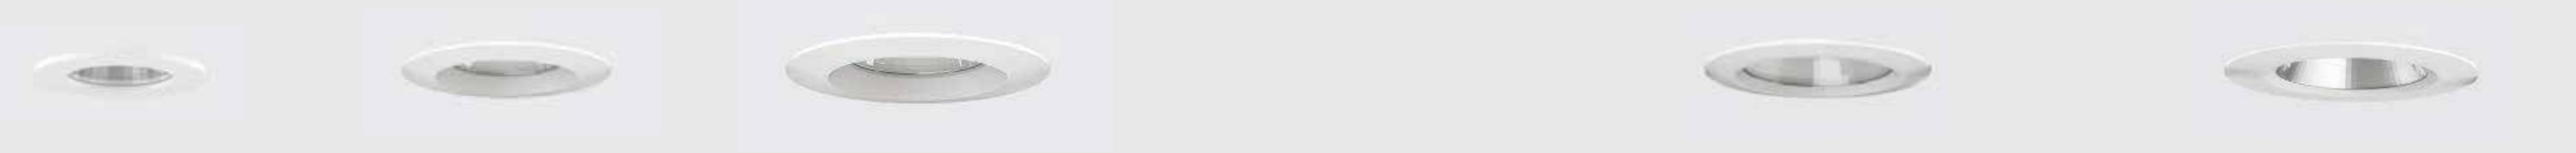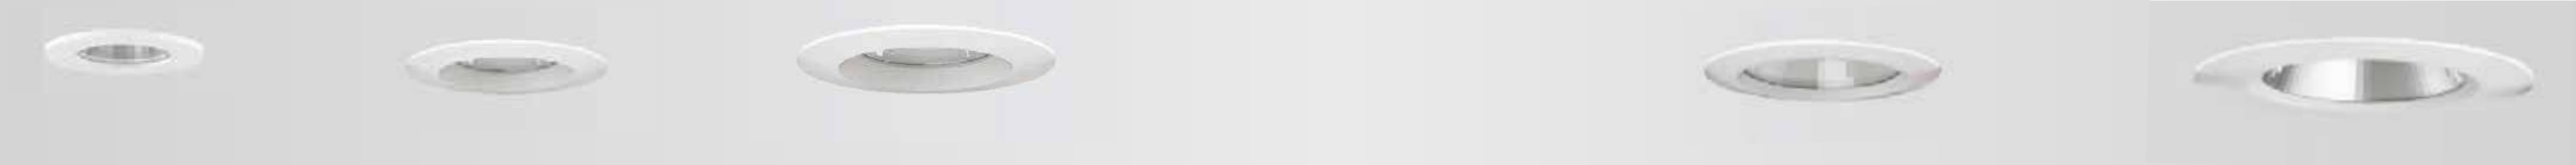


KAS-CL08R-2F
Power: 5W/8W
Cutout: 55mm
Height: 79mm




KAS-CL08R-3F
Power: 10W
Cutout: 65mm
Height: 84mm




KAS-CL08R-4F
Power: 15W/20W
Cutout: 90mm
Height: 97mm



KAS-CL08R-4F
Power: 30W
Cutout: 90mm
Height: 108mm




KAS-CL08R-5F
Power: 30W/40W
Cutout: 130mm
Height: 116mm




CL08 Flat series




KAS-CL08R-2T
Power: 5W/8W/10W
Cutout: 65mm
Height: 79mm




KAS-CL08R-3T
Power: 10W
Cutout: 75mm
Height: 84mm




KAS-CL08R-4T
Power: 15W/20W
Cutout: 110mm
Height: 98mm








KAS-CL08R-4T
Power: 30W
Cutout: 110mm
Height: 110mm

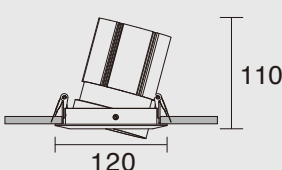






KAS-CL08R-5T
Power: 30W/40W
Cutout: 145mm
Height: 125mm

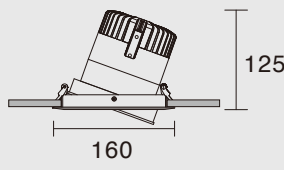


CL08 Flat series

Model	KAS-CL08R-2F	KAS-CL08R-3F	KAS-CL08R-4F		KAS-CL08R-4F	KAS-CL08R-5F
Product Photo						
Dimension(mm)						
Cutout(mm)	55	65	90		90	130
Wattage	5W/8W	10W	15W/20W		30W	30W/40W
CCT	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K		2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K
CRI	>90	>90	>90		>90	>90
Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°	15°/24°/30°/36°/60°		15°/24°/36°/50°	15°/24°/30°/36°/45°
Lumen	325 -520LM	650LM	975-1300LM		1950LM	1950-2600LM
IP	IP20	IP20	IP20		IP20	IP20
Dimming	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI		TRIAC/1-10V/DALI	TRIAC/1-10V/DALI
Colour	White+Iron gray	White+Iron gray	White+Iron gray		White+Iron gray	White+Iron gray


CL08 Flat series

Model	KAS-CL08R-2T	KAS-CL08R-3T	KAS-CL08R-4T		KAS-CL08R-4T	KAS-CL08R-5T
Product Photo						
Dimension(mm)						
Cutout(mm)	65	75	110		110	145
Wattage	5W/8W	10W	15W/20W		30W	30W/40W
CCT	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K		2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K
CRI	>90	>90	>90		>90	>90
Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°	15°/24°/30°/36°/60°		15°/24°/36°/50°	15°/24°/30°/36°/45°
Lumen	325 -520LM	650LM	975-1300LM		1950LM	1950-2600LM
IP	IP20	IP20	IP20		IP20	IP20
Dimming	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI		TRIAC/1-10V/DALI	TRIAC/1-10V/DALI
Colour	White+iron gray	White+iron gray	White+iron gray		White+iron gray	White+iron gray

KAS-CL08R-2F

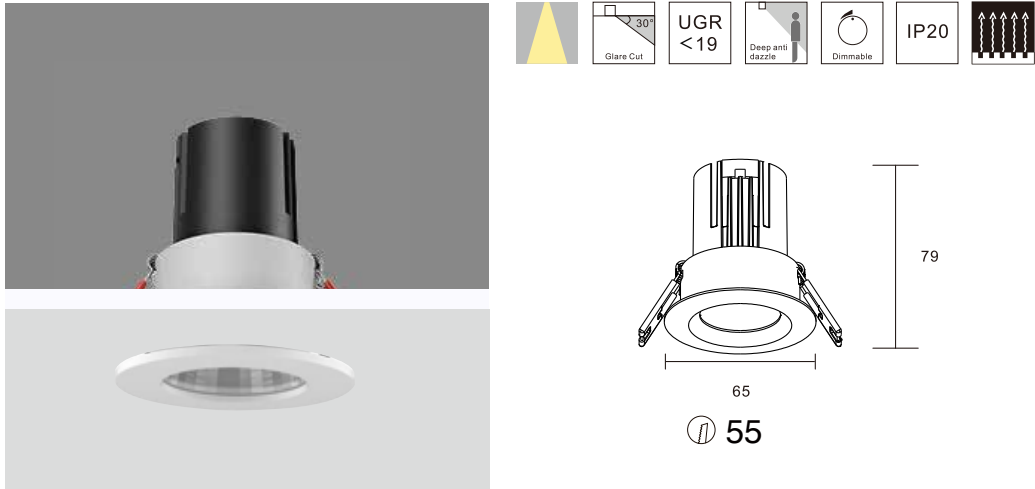


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
KAS-CL08R-205F	5W	34V	120mA	90	2700K	15°	486lm	459lm	ON-OFF
						24°	486lm	428lm	TRIAC
						30°	486lm	403lm	1-10V
						36°	486lm	424lm	DALI
KAS-CL08R-205T	5W	34V	120mA	90	3000K	15°	511lm	483lm	ON-OFF
						24°	511lm	451lm	TRIAC
						30°	511lm	424lm	1-10V
						36°	511lm	446lm	DALI
	5W	34V	120mA	90	4000K	15°	542lm	512lm	ON-OFF
						24°	542lm	478lm	TRIAC
						30°	542lm	449lm	1-10V
						36°	542lm	473lm	DALI

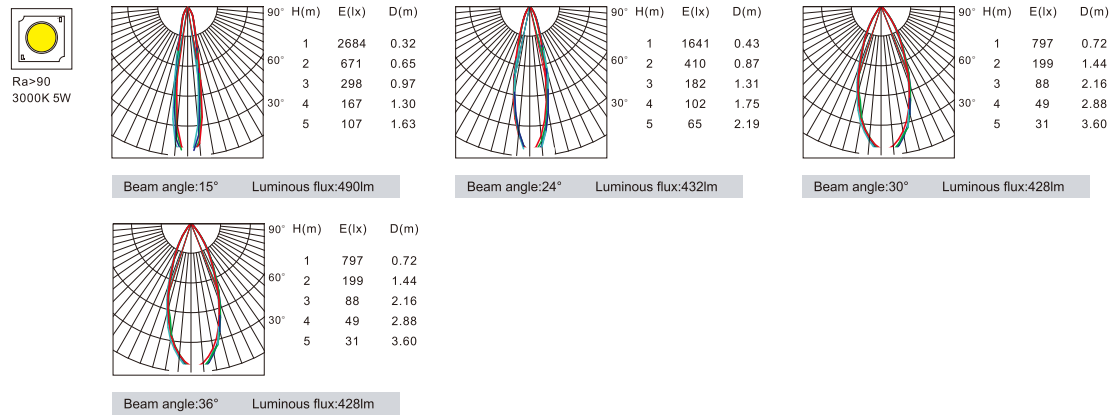


KAS-CL08R-2T




Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
KAS-CL08R-208F	8W	34V	200mA	90	2700K	15°	773lm	539lm	ON-OFF
						24°	773lm	480lm	TRIAC
						30°	773lm	464lm	1-10V
						36°	773lm	592lm	DALI
KAS-CL08R-208T	8W	34V	200mA	90	3000K	15°	812lm	567lm	ON-OFF
						24°	812lm	505lm	TRIAC
						30°	812lm	488lm	1-10V
						36°	812lm	622lm	DALI
	8W	34V	200mA	90	4000K	15°	862lm	601lm	ON-OFF
						24°	862lm	536lm	TRIAC
						30°	862lm	518lm	1-10V
						36°	862lm	661lm	DALI

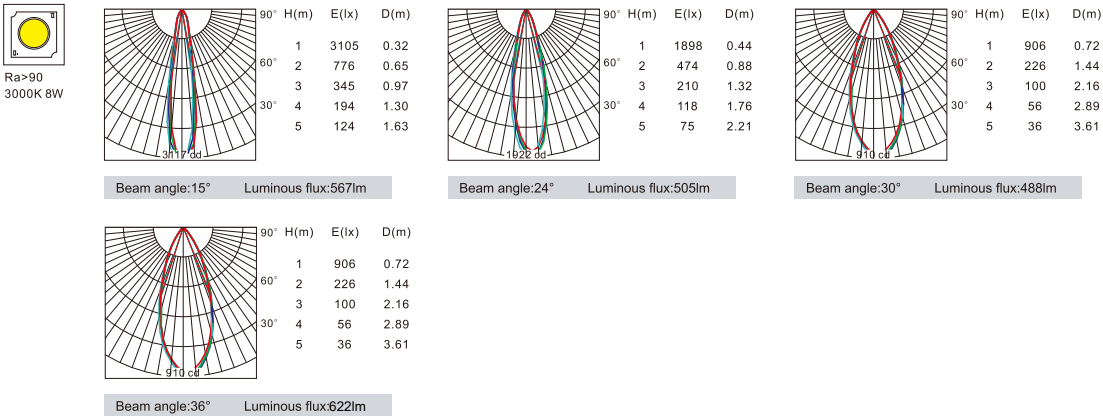

KAS-CL08R-3F

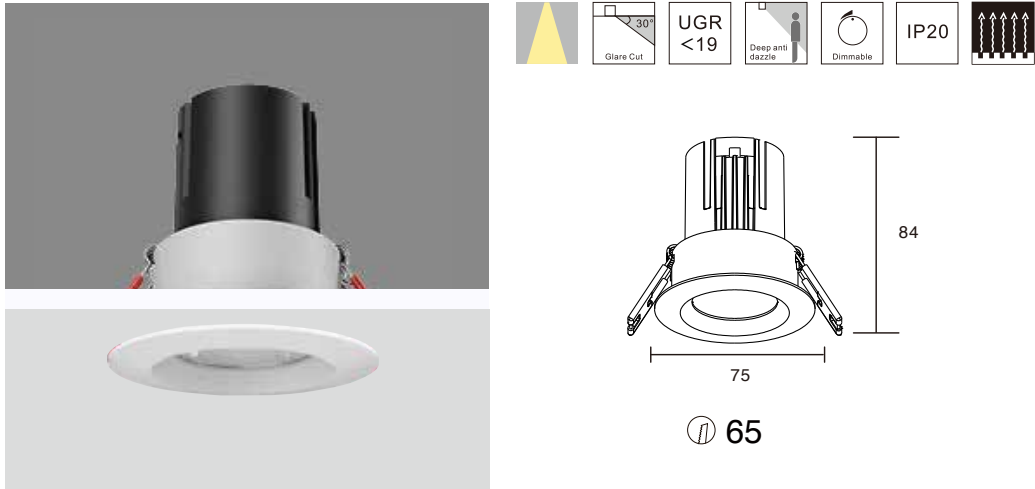


Model		Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	KAS-CL08R-310F	10W	34V	250mA	90	2700K	15°	965lm	791lm	ON-OFF
							24°	965lm	772lm	TRIAC
							30°	965lm	583lm	1-10V
							36°	965lm	583lm	DALI
		10W	34V	250mA	90	3000K	15°	1015lm	833lm	ON-OFF
							24°	1015lm	812lm	TRIAC
							30°	1015lm	614lm	1-10V
							36°	1015lm	614lm	DALI
		10W	34V	250mA	90	4000K	15°	1077lm	883lm	ON-OFF
							24°	1077lm	861lm	TRIAC
							30°	1077lm	651lm	1-10V
							36°	1077lm	651lm	DALI

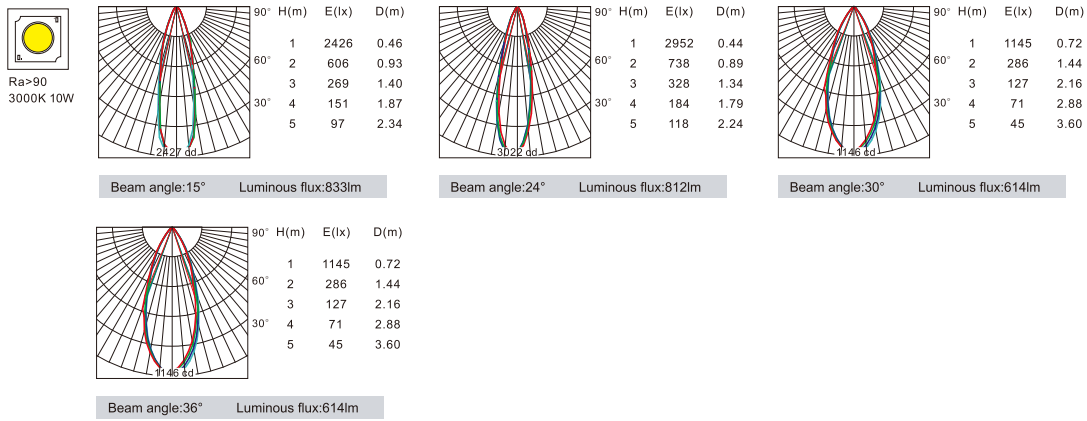


KAS-CL08R-3T




Model		Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	KAS-CL08R-310T	10W	34V	250mA	90	2700K	15°	965lm	791lm	ON-OFF
							24°	965lm	772lm	TRIAC
							30°	965lm	583lm	1-10V
							36°	965lm	583lm	DALI
		10W	34V	250mA	90	3000K	15°	1015lm	833lm	ON-OFF
							24°	1015lm	812lm	TRIAC
							30°	1015lm	614lm	1-10V
							36°	1015lm	614lm	DALI
		10W	34V	250mA	90	4000K	15°	1077lm	883lm	ON-OFF
							24°	1077lm	861lm	TRIAC
							30°	1077lm	651lm	1-10V
							36°	1077lm	651lm	DALI

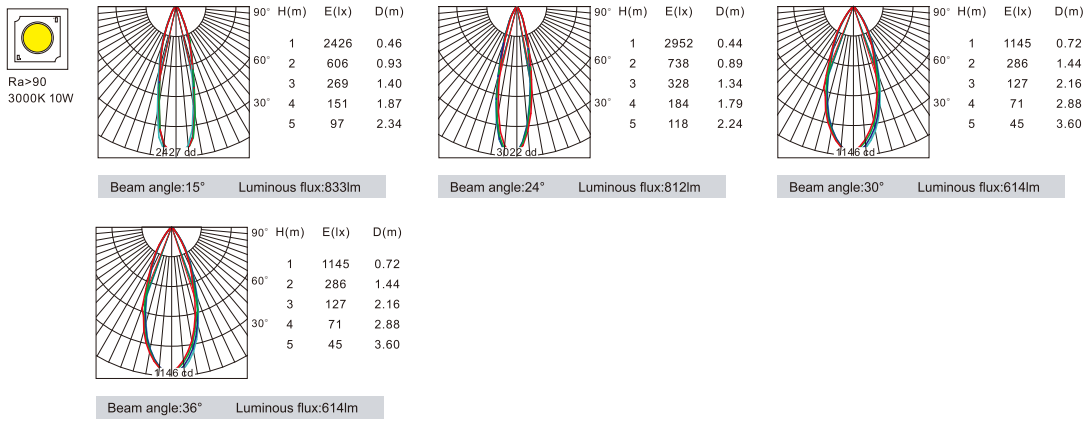


KAS-CL08R-4F

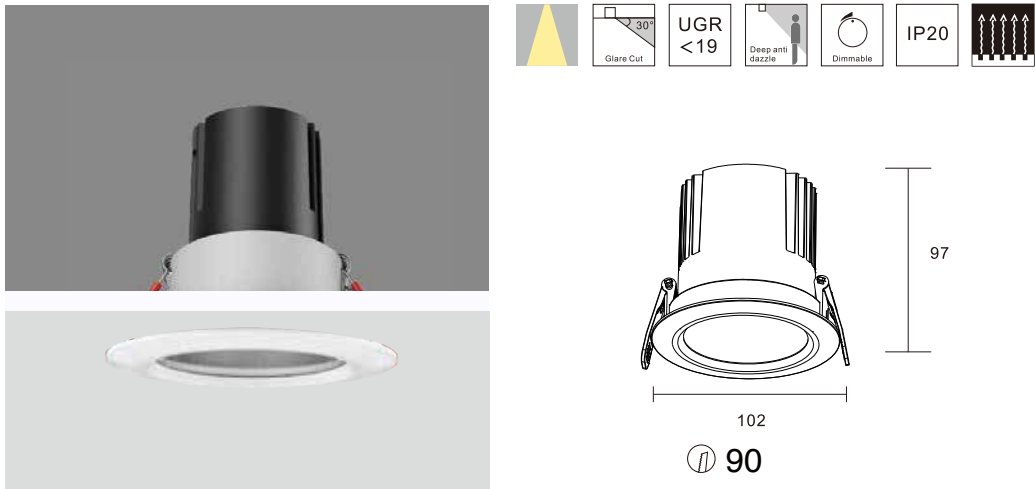


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
KAS-CL08R-415F KAS-CL08R-415T	15W	34V	350mA	90	2700K	15°	1642lm	1516lm	ON-OFF TRIAC 1-10V DALI
						24°	1642lm	1433lm	
						30°	1642lm	1428lm	
						36°	1642lm	1513lm	
						60°	1642lm	1532lm	
	15W	34V	350mA	90	3000K	15°	1720lm	1596lm	ON-OFF TRIAC 1-10V DALI
						24°	1720lm	1509lm	
						30°	1720lm	1503lm	
						36°	1720lm	1593lm	
						60°	1720lm	1613lm	
	15W	34V	350mA	90	4000K	15°	1833lm	1692lm	ON-OFF TRIAC 1-10V DALI
						24°	1833lm	1600lm	
						30°	1833lm	1594lm	
						36°	1833lm	1689lm	
						60°	1833lm	1710lm	

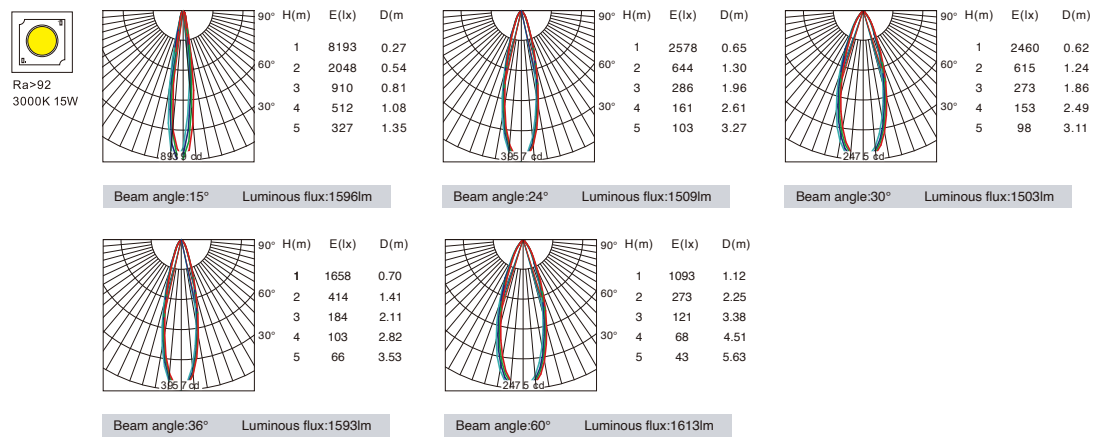


KAS-CL08R-4T

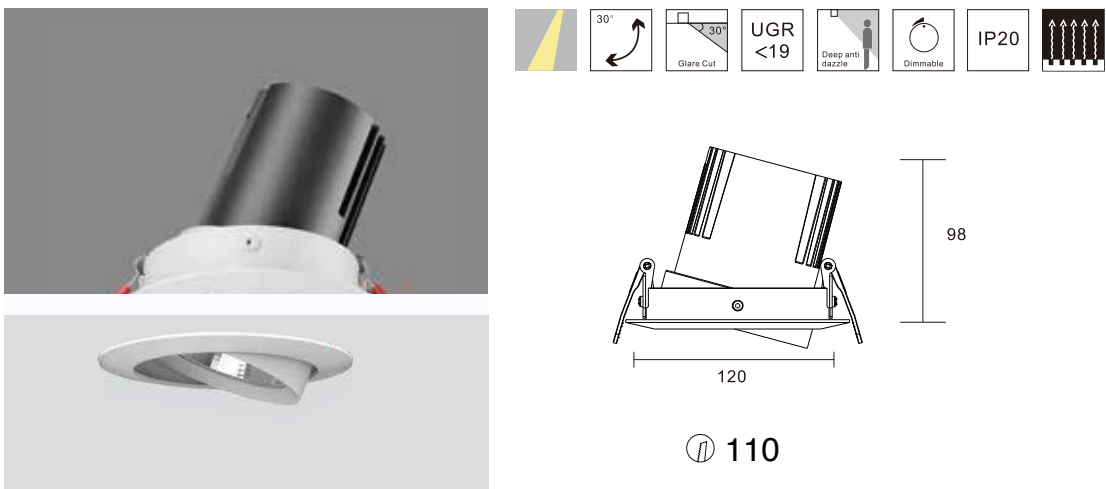


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
KAS-CL08R-420F KAS-CL08R-420T	20W	34V	500mA	90	2700K	15°	2252lm	2088lm	ON-OFF TRIAC 1-10V DALI
						24°	2252lm	1981lm	
						30°	2252lm	1929lm	
						36°	2252lm	2043lm	
						60°	2252lm	2056lm	
	20W	34V	500mA	90	3000K	15°	2370lm	2198lm	ON-OFF TRIAC 1-10V DALI
						24°	2370lm	2085lm	
						30°	2370lm	2030lm	
						36°	2370lm	2150lm	
						60°	2370lm	2164lm	
	20W	34V	500mA	90	4000K	15°	2252lm	2331lm	ON-OFF TRIAC 1-10V DALI
						24°	2252lm	2211lm	
						30°	2252lm	2153lm	
						36°	2252lm	2280lm	
						60°	2252lm	2295lm	

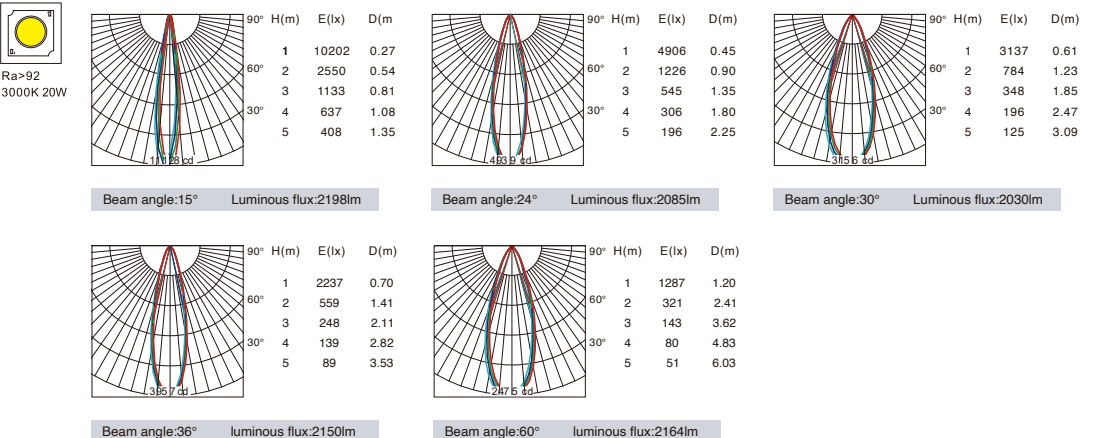

KAS-CL08R-4F

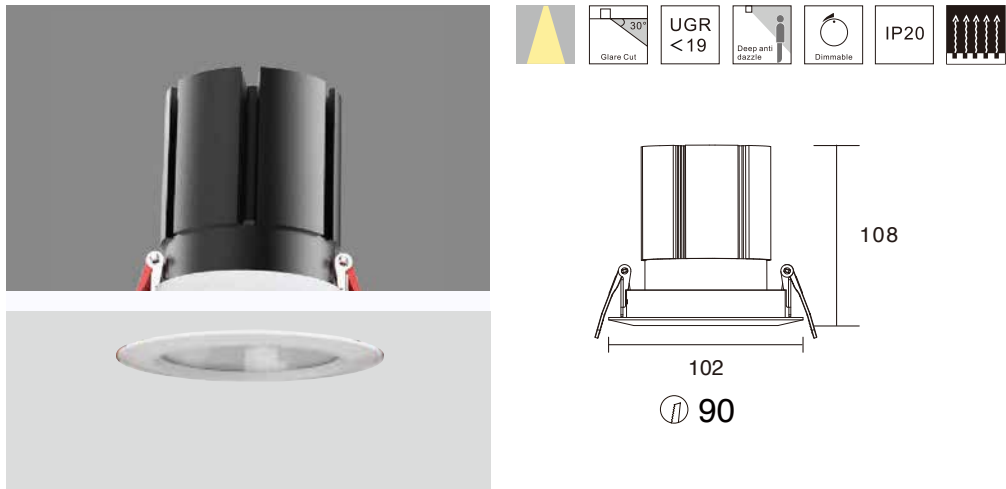


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 KAS-CL08R-430F	30W	34V	700mA	90	2700K	15°	2737lm	2852lm	ON-OFF
						24°	2737lm	2765lm	TRIAC
						36°	2737lm	2811lm	1-10V
						50°	2737lm	2779lm	DALI
	30W	34V	700mA	90	3000K	15°	2876lm	2997lm	ON-OFF
						24°	2876lm	2906lm	TRIAC
						36°	2876lm	2954lm	1-10V
						50°	2876lm	2921lm	DALI
	30W	34V	700mA	90	4000K	15°	3052lm	3180lm	ON-OFF
						24°	3052lm	3083lm	TRIAC
						36°	3052lm	3134lm	1-10V
						50°	3052lm	3099lm	DALI

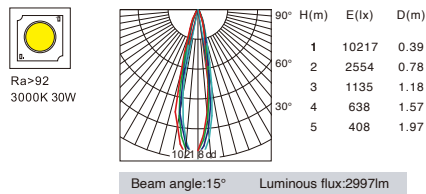

KAS-CL08R-4T




Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 KAS-CL08R-430T	30W	34V	700mA	90	2700K	15°	2737lm	2852lm	ON-OFF
						24°	2737lm	2765lm	TRIAC
						36°	2737lm	2811lm	1-10V
						50°	2737lm	2779lm	DALI
	30W	34V	700mA	90	3000K	15°	2876lm	2997lm	ON-OFF
						20°	2876lm	2906lm	TRIAC
						36°	2876lm	2954lm	1-10V
						45°	2876lm	2921lm	DALI
	30W	34V	700mA	90	4000K	15°	3052lm	3180lm	ON-OFF
						24°	3052lm	3083lm	TRIAC
						36°	3052lm	3134lm	1-10V
						50°	3052lm	3099lm	DALI

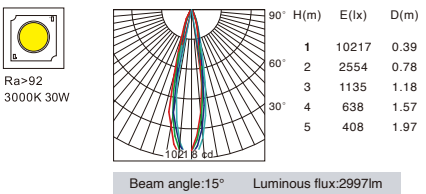


KAS-CL08R-5F




Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
KAS-CL08R-530F	30W	34V	700mA	90	2700K	15°	3284lm	3089lm	ON-OFF TRIAC 1-10V DALI
						24°	3284lm	3072lm	
						30°	3284lm	3054lm	
						36°	3284lm	3010lm	
						45°	3284lm	3083lm	
KAS-CL08R-530T	30W	34V	700mA	90	3000K	15°	3451lm	3246lm	ON-OFF TRIAC 1-10V DALI
						24°	3451lm	3229lm	
						30°	3451lm	3210lm	
						36°	3451lm	3163lm	
						45°	3451lm	3240lm	
	30W	34V	700mA	90	4000K	15°	3662lm	3444lm	ON-OFF TRIAC 1-10V DALI
						24°	3662lm	3426lm	
						30°	3662lm	3406lm	
						36°	3662lm	3356lm	
						45°	3662lm	3438lm	

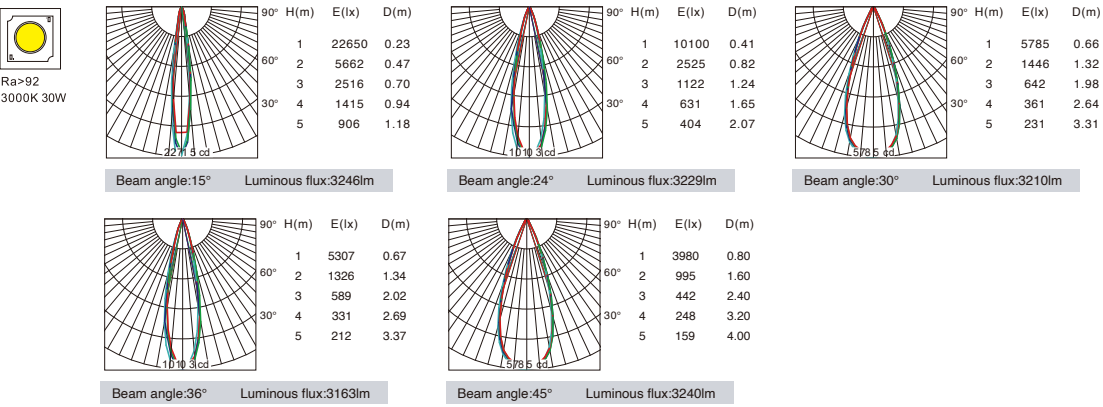

KAS-CL08R-5T

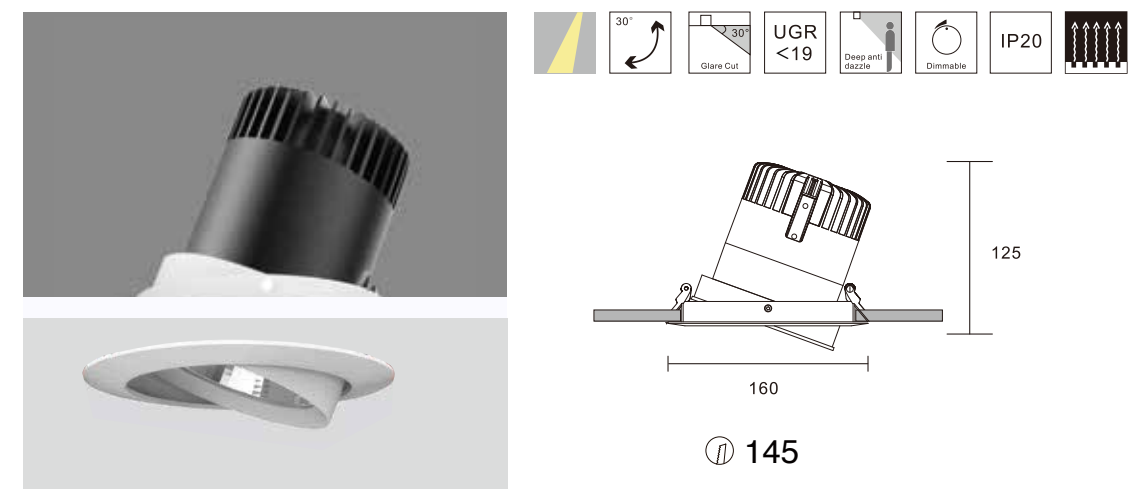

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
KAS-CL08R-540F	40W	34V	1000mA	90	2700K	15°	4959lm	4223lm	ON-OFF TRIAC 1-10V DALI
						24°	4959lm	4228lm	
						30°	4959lm	4250lm	
						36°	4959lm	4258lm	
						45°	4959lm	4333lm	
KAS-CL08R-540T	40W	34V	1000mA	90	3000K	15°	5157lm	4392lm	ON-OFF TRIAC 1-10V DALI
						24°	5157lm	4397lm	
						30°	5157lm	4420lm	
						36°	5157lm	4428lm	
						45°	5157lm	4506lm	
	40W	34V	1000mA	90	4000K	15°	5235lm	4458lm	ON-OFF TRIAC 1-10V DALI
						24°	5235lm	4463lm	
						30°	5235lm	4486lm	
						36°	5235lm	4494lm	
						45°	5235lm	4574lm	

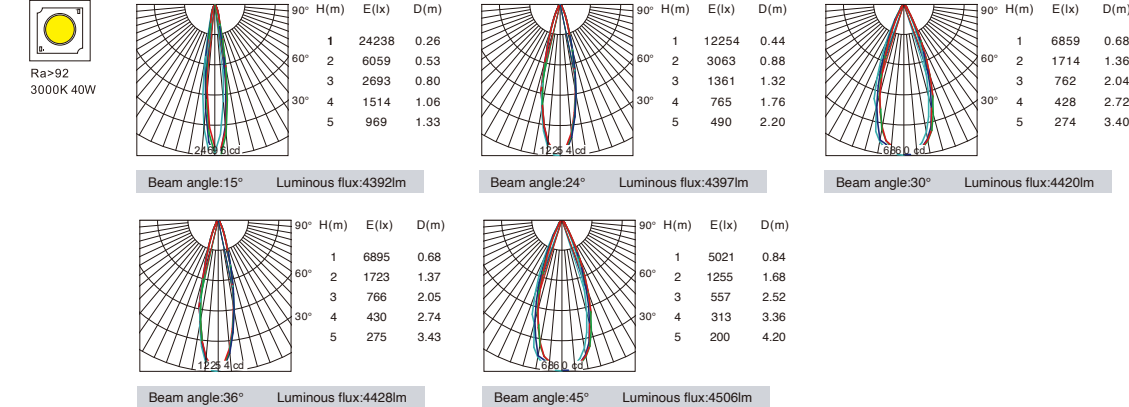





CL17-18 Flat Series



CL17/18 Series T rimless Downlight


Trimless version downlight integrates the light as a unit with the ceiling, illuminating the art of lighting and high taste, high-ended lighting demands. performance, durability and versatility feature this sophisticated version with invisible ring.

CL17-18 Flat Series

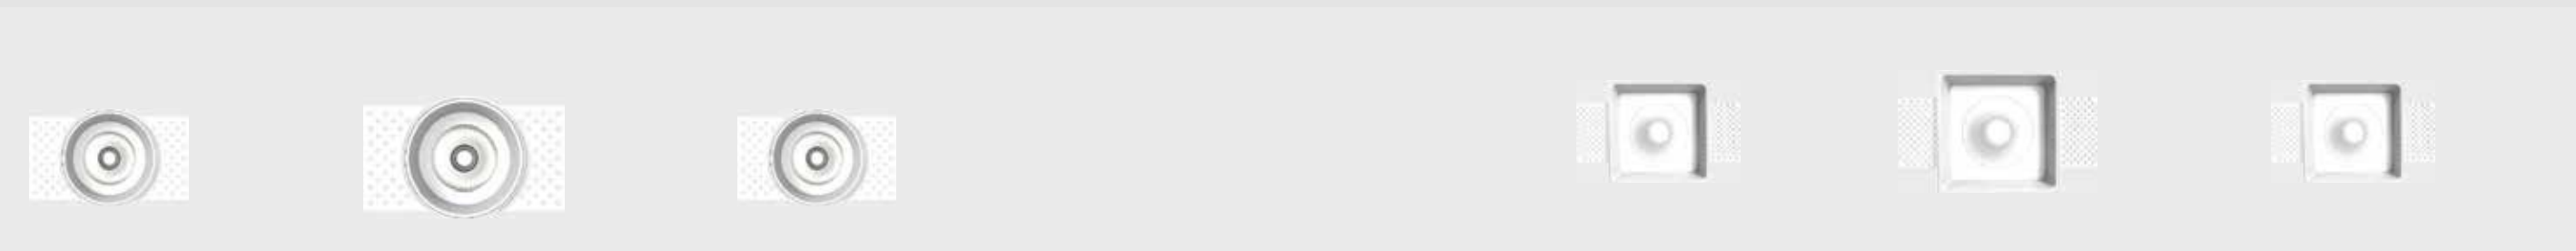


KAS-CL17R-3T

Power: 10W
Cutout: 82mm
Height: 103mm




KAS-CL17R-4T

Power: 15W/20W
Cutout: 112mm
Height: 119 mm




KAS-CL17R-4T

Power: 30W
Cutout: 112mm
Height: 130mm




KAS-CL18R-3T

Power: 10W
Cutout: 72*72mm
Height: 100mm




KAS-CL18R-4T








Power: 15W/20W
Cutout: 102*102mm
Height: 119mm




KAS-CL18R-4T

Power: 30W
Cutout: 102*102mm
Height: 130mm




Model	KAS-CL17R-310T	KAS-CL17R-415T	KAS-CL17R-430T		KAS-CL18R-310T	KAS-CL18R-415T	KAS-CL18R-430T
Product Photo							
Dimension(mm)							
Cutout(mm)	82	112	112		72*72	102*102	102*102
Wattage	10W	15W/20W	30W		10W	15W/20W	30W
CCT	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K		2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K
CRI	>90	>90	>90		>90	>90	>90
Beam Angle	15°/24°/30°/36°	15°/24°/30°/36°/60°	15°/24°/30°/36°/50°		20°/30°/36°	15°/24°/30°/36°/60°	15°/24°/30°/36°/60°
Lumen	550-770LM	750-1200LM	1700LM		1150-1800LM	2100-2900LM	2100-2900LM
IP	IP20	IP20	IP20		IP20	IP20	IP20
Dimming	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI		TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI
Colour	White+Iron gray	White+Iron gray	White+Iron gray		White+Iron gray	White+Iron gray	White+Iron gray

KAS-CL17R-3T

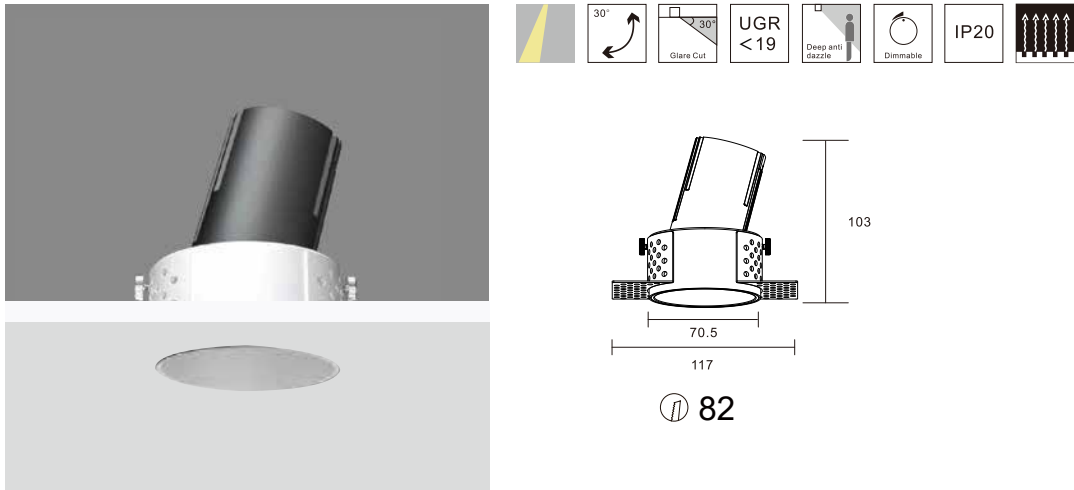


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 KAS-CL17R-310T	10W	34V	250mA	90	2700K	15°	965lm	631lm	ON-OFF
						24°	965lm	513lm	TRIAC
						30°	965lm	503lm	1-10V
						36°	965lm	551lm	DALI
	10W	34V	250mA	90	3000K	15°	1015lm	664lm	ON-OFF
						24°	1015lm	540lm	TRIAC
						30°	1015lm	530lm	1-10V
						36°	1015lm	580lm	DALI
	10W	34V	250mA	90	4000K	15°	1077lm	704lm	ON-OFF
						24°	1077lm	572lm	TRIAC
						30°	1077lm	562lm	1-10V
						36°	1077lm	615lm	DALI

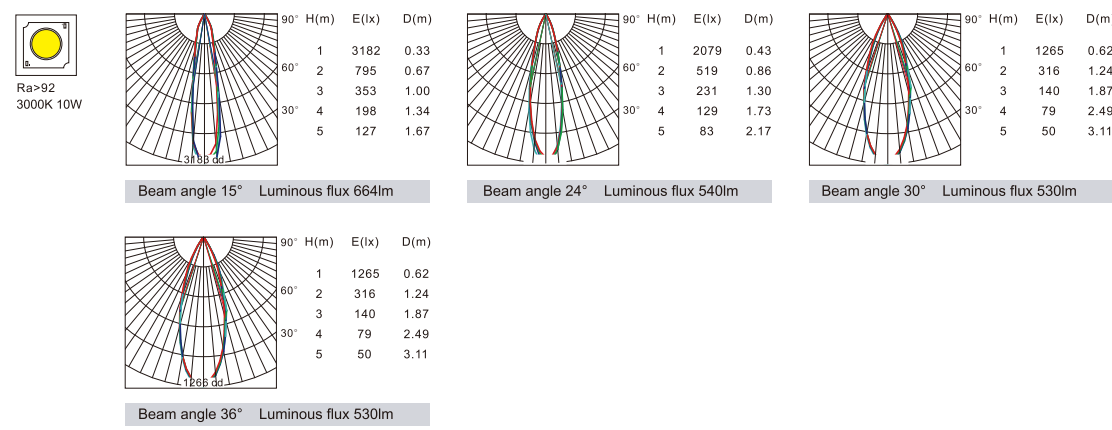


KAS-CL17R-4T




Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 KAS-CL17R-415T	15W	34V	350mA	90	2700K	15°	1314lm	993lm	ON-OFF
						24°	1314lm	1041lm	TRIAC
						30°	1314lm	1057lm	1-10V
						36°	1314lm	1103lm	DALI
	15W	34V	350mA	90	3000K	60°	1314lm	1119lm	ON-OFF
						15°	1383lm	1046lm	TRIAC
						24°	1383lm	1096lm	1-10V
						30°	1383lm	1113lm	DALI
	15W	34V	350mA	90	4000K	36°	1383lm	1161lm	ON-OFF
						60°	1383lm	1178lm	TRIAC
						15°	1467lm	1109lm	1-10V
						24°	1467lm	1162lm	DALI
 KAS-CL17R-420T	20W	34V	500mA	90	2700K	30°	1467lm	1180lm	ON-OFF
						36°	1467lm	1231lm	TRIAC
						60°	1467lm	1249lm	1-10V
	20W	34V	500mA	90	3000K	15°	1877lm	1230lm	ON-OFF
						24°	1877lm	1204lm	TRIAC
						30°	1877lm	1182lm	1-10V
						36°	1877lm	1337lm	DALI
	20W	34V	500mA	90	4000K	60°	1877lm	1313lm	ON-OFF
						15°	1975lm	1295lm	TRIAC
						24°	1975lm	1267lm	1-10V
						30°	1975lm	1244lm	DALI
 KAS-CL17R-420T	20W	34V	500mA	90	4000K	36°	1975lm	1407lm	ON-OFF
						60°	1975lm	1382lm	TRIAC
						15°	2095lm	1373lm	1-10V
						24°	2095lm	1343lm	DALI
	20W	34V	500mA	90	4000K	30°	2095lm	1319lm	ON-OFF
						36°	2095lm	1492lm	TRIAC
						60°	2095lm	1465lm	1-10V
									DALI

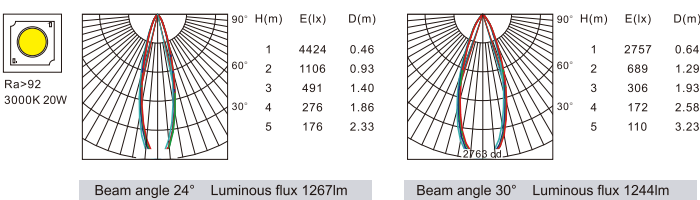


KAS-CL17R-4T

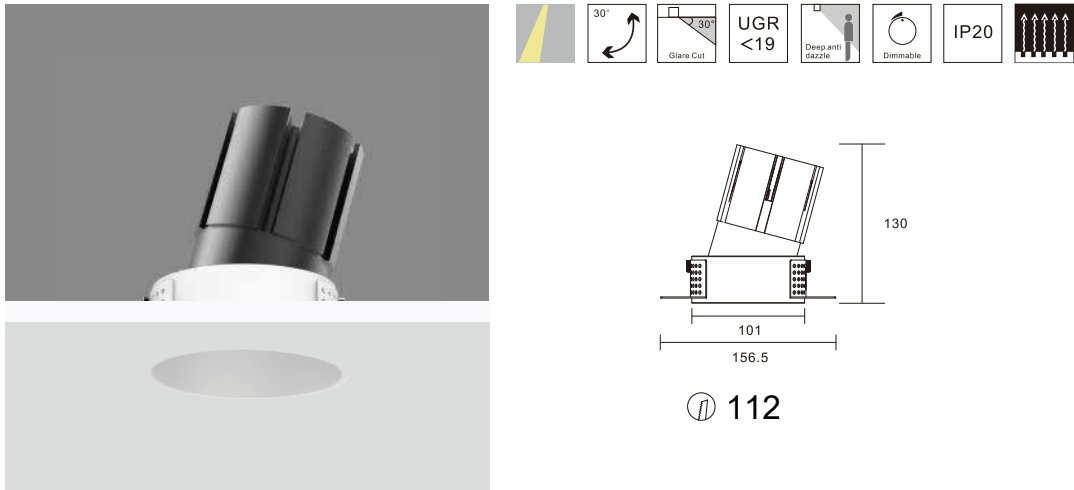


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 KAS-CL17R-430T	30W	34V	700mA	90	2700K	15°	2737lm	2157lm	ON-OFF
						24°	2737lm	2146lm	TRIAC
						36°	2737lm	2258lm	1-10V
						50°	2737lm	2138lm	DALI
	30W	34V	700mA	90	3000K	15°	2876lm	2267lm	ON-OFF
						24°	2876lm	2255lm	TRIAC
						36°	2876lm	2373lm	1-10V
						50°	2876lm	2247lm	DALI
	30W	34V	700mA	90	4000K	15°	3052lm	2405lm	ON-OFF
						24°	3052lm	2392lm	TRIAC
						36°	3052lm	2518lm	1-10V
						50°	3052lm	2384lm	DALI

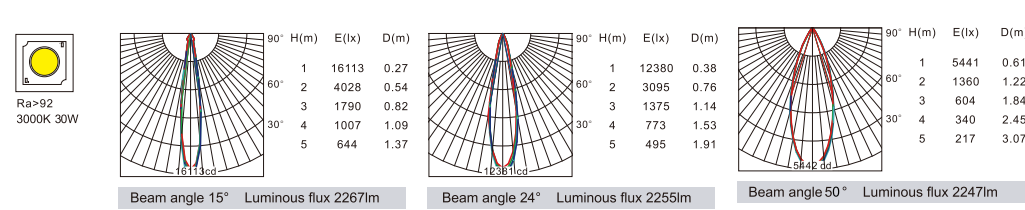


KAS-CL18R-3T

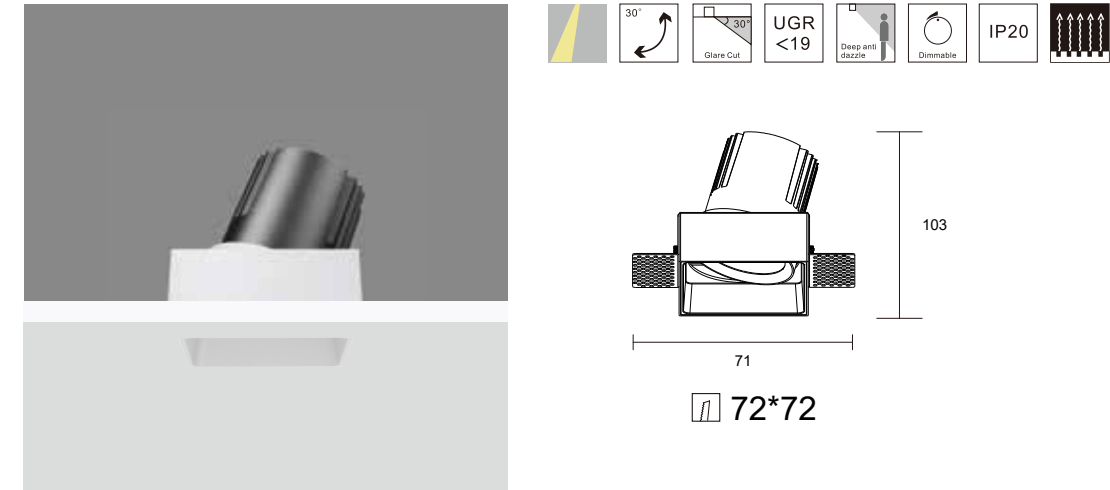


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 KAS-CL18R-310T	10W	34V	250mA	90	2700K	15°	965lm	631lm	ON-OFF
						24°	965lm	513lm	TRIAC
						30°	965lm	503lm	1-10V
						36°	965lm	551lm	DALI
	10W	34V	250mA	90	3000K	15°	1015lm	664lm	ON-OFF
						24°	1015lm	540lm	TRIAC
						30°	1015lm	530lm	1-10V
						36°	1015lm	580lm	DALI
	10W	34V	250mA	90	4000K	15°	1077lm	704lm	ON-OFF
						24°	1077lm	572lm	TRIAC
						30°	1077lm	562lm	1-10V
						36°	1077lm	615lm	DALI

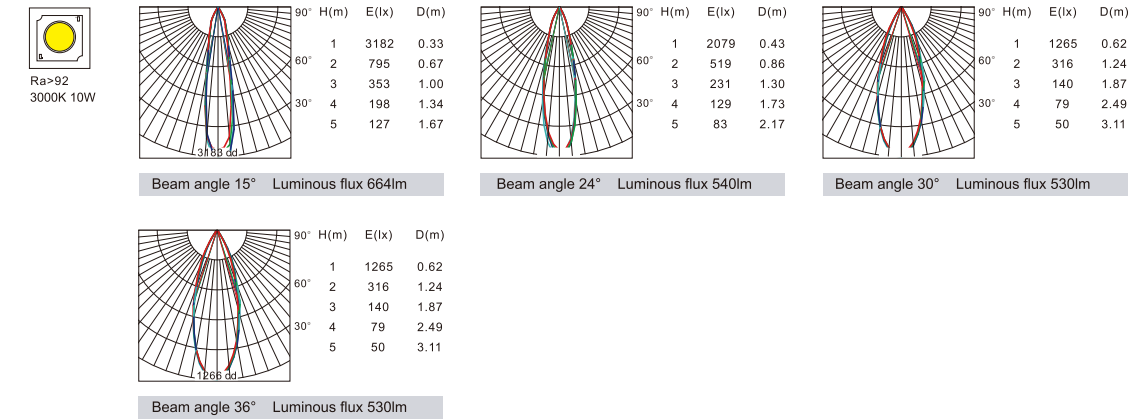


KAS-CL18R-4T

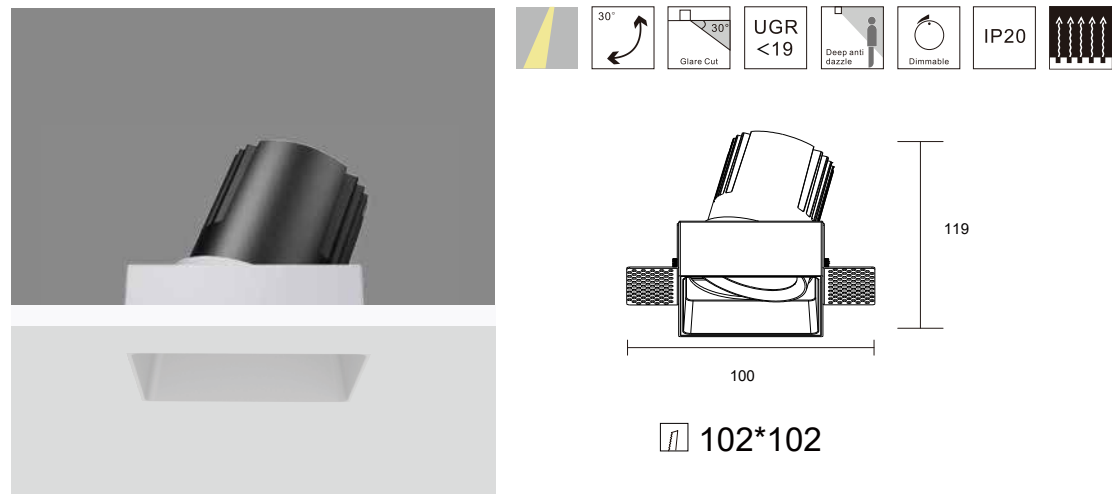


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type	
	KAS-CL18R-415T	15W	34V	350mA	90	2700K	15°	1314lm	1000lm	ON-OFF TRIAC 1-10V DALI
							24°	1314lm	991lm	
							30°	1314lm	968lm	
							36°	1314lm	1102lm	
							60°	1314lm	1075lm	
		15W	34V	350mA	90	3000K	15°	1383lm	1053lm	ON-OFF TRIAC 1-10V DALI
							24°	1383lm	1044lm	
							30°	1383lm	1019lm	
							36°	1383lm	1160lm	
							60°	1383lm	1132lm	
		15W	34V	350mA	90	4000K	15°	1467lm	1116lm	ON-OFF TRIAC 1-10V DALI
							24°	1467lm	1107lm	
							30°	1467lm	1080lm	
							36°	1467lm	1230lm	
							60°	1467lm	1331lm	
	KAS-CL18R-420T	20W	34V	500mA	90	2700K	15°	1877lm	1187lm	ON-OFF TRIAC 1-10V DALI
							24°	1877lm	1175lm	
							30°	1877lm	1304lm	
							36°	1877lm	1382lm	
							60°	1877lm	1333lm	
		20W	34V	500mA	90	3000K	15°	1975lm	1249lm	ON-OFF TRIAC 1-10V DALI
							24°	1975lm	1237lm	
							30°	1975lm	1373lm	
							36°	1975lm	1455lm	
							60°	1975lm	1454lm	
		20W	34V	500mA	90	4000K	15°	2095lm	1324lm	ON-OFF TRIAC 1-10V DALI
							24°	2095lm	1312lm	
							30°	2095lm	1383lm	
							36°	2095lm	1543lm	
							60°	2095lm	1542lm	

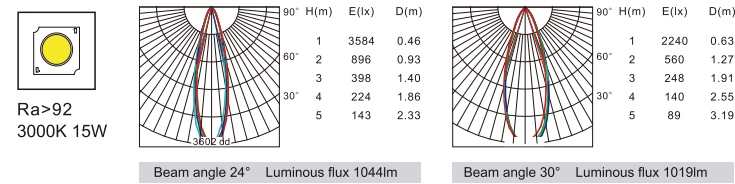

KAS-CL18R-4T

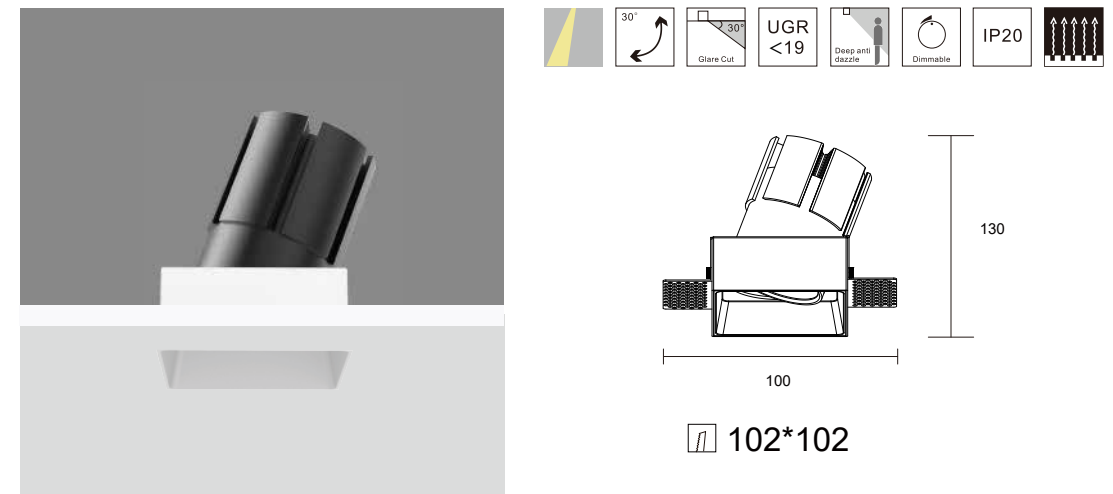

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 KAS-CL18R-430T	30W	34V	700mA	90	2700K	15°	2737lm	2157lm	ON-OFF TRIAC 1-10V DALI
						24°	2737lm	2146lm	
						30°	2737lm	2041lm	
						36°	2737lm	2258lm	
						60°	2737lm	2138lm	
	30W	34V	700mA	90	3000K	15°	2876lm	2267lm	ON-OFF TRIAC 1-10V DALI
						24°	2876lm	2255lm	
						30°	2876lm	2145lm	
						36°	2876lm	2373lm	
						60°	2876lm	2247lm	
	30W	34V	700mA	90	4000K	15°	3052lm	2405lm	ON-OFF TRIAC 1-10V DALI
						24°	3052lm	2392lm	
						30°	3052lm	2276lm	
						36°	3052lm	2518lm	
						60°	3056lm	2384lm	

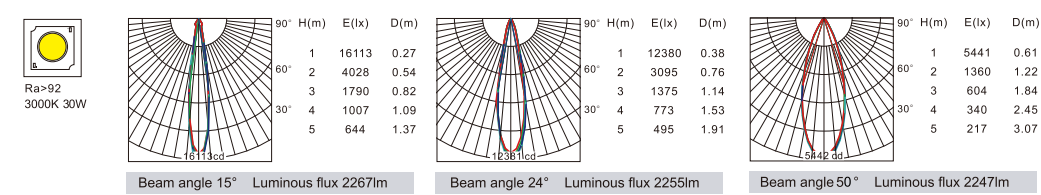

Contact details

IINNO Ltd

Unit 7, 8/F., Tower B,
83 King Lam Street,
Lai Chi Kok, Kowloon,
Hong Kong

Tel: +852 2134 9906

+86 (0)769 23010151/2

M: +86 13922905402

Email: sales@iinno-lighting.com

www.iinno-lighting.com

