


CL38 series

Designing your lighting solutions



CL38 Series

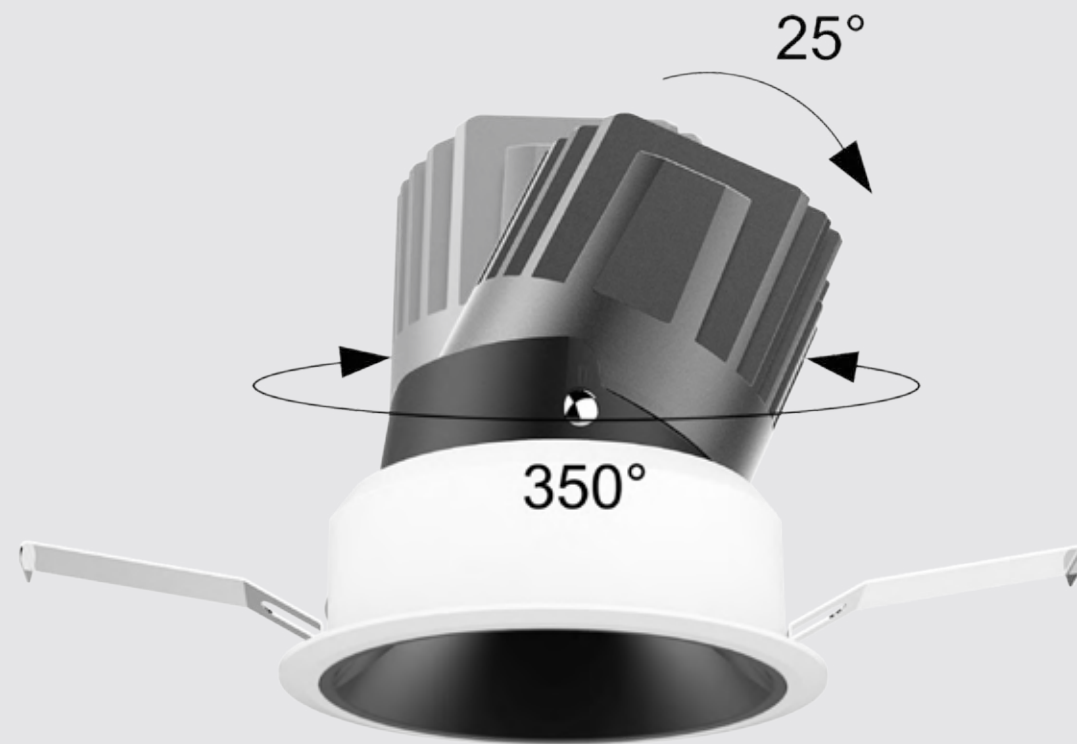

CL 38 series LED ceiling spotlight, as a high quality fixture, is specially designed for luxury hotels and villas. Lamp body can be universally adjustable, vertical irradiation and wall washer. It can meet different lighting performance of hotel room, corridor, meeting room, hall and resting area ect.



UV processed black cup



Highly specular aluminium



White



Gold




- Dark light technology with chip deeply hidden, well-designed dark light reflector with $UGR \leq 19$. Comfortable and no glare.
- Tens of reflectors in option, to satisfy designers requirements to different area and style.
- Precise distribution and even transition. Less scattering makes vision more comfortable.
- CL 38 series use a composable, alternative, modular, simple and elegant lamp body.


CL38 Series




K-CL38-3F-R2D
Power: 5W/8W
Cutout: 75mm
Height: 88.6mm




K-CL38-3F-R2D
Power: 10W/12W/15W
Cutout: 75mm
Height: 111.6mm




K-CL38-3F-R2D
Power: 18W
Cutout: 75mm
Height: 120.6mm




K-CL38-3T-R2D
Power: 5W/8W
Cutout: 75mm
Height: 88.6mm




K-CL38-3T-R2D
Power: 10W/12W/15W
Cutout: 75mm
Height: 111.6mm














K-CL38-3T-R2D
Power: 18W
Cutout: 75mm
Height: 120.6mm



K-CL38-4T-R2D
Power: 25W/30W
Cutout: 90-95mm
Height: 157mm




CL38 Series


Model	K-CL38-3F-R2D	K-CL38-3F-R2D	K-CL38-3F-R2D	K-CL38-45F-R2D	K-CL38-5F-R2S		K-CL38-2T-R2D	K-CL38-3T-R2D	K-CL38-3T-R2D	K-CL38-3T-R2D	K-CL38-4T-R2D	K-CL38-4F-R2D
Product Photo												
Dimension(mm)												
Cutout(mm)	75	75	75	125	150		55	75	75	75	95-100	95-100
Wattage	5W/8W	10W/12W/15W	18W	35W/40W	40W/50W		5W/7W	5W/8W	10W/12W/15W	18W	20W	20W/25W
CCT	2700K 3000K 4000K 5000K	2700K 3000K 4000K 5000K	2700K 3000K 4000K 5000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K		2700K 3000K 4000K 5000K	2700K 3000K 4000K 5000K	2700K 3000K 3500K 4000K	2700K 3000K 4000K 5000K	2700K 3000K 4000K 5000K	2700K 3000K 4000K 5000K
CRI	>90	>90	>90	>90	>90		>90	>90	>90	>90	>90	>90
Beam Angle	11°/15°/18°/24°/36°/50°	11°/15°/18°/24°/36°/50°	15°/24°/36°/50°	18°/24°/36°/50°	18°/24°/36°/50°		18°/24°/36°	11°/15°/18°/24°/36°/50°	11°/15°/18°/24°/36°/50°	15°/24°/36°/50°	10°/15°/24°/36°/50°	10°/15°/24°/36°/50°
Lumen	214-498LM	323-925LM	1228-1348LM	2712-3919LM	3476-5746LM		355-413LM	214-498LM	323-925LM	1228-1348LM	1489-1966LM	1622-2616LM
IP	IP20/IP44	IP20/IP44	IP44	IP20	IP20		IP20/IP44	IP20/IP44	IP20/IP44	IP44	IP20/IP44	IP20/IP44
Dimming	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI		TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI
Accessory	Honeycomb Filter	Honeycomb Filter	Honeycomb Filter	Honeycomb Filter	Honeycomb Filter		Honeycomb Filter	Honeycomb Filter	Honeycomb Filter	Honeycomb Filter	Honeycomb Filter	Honeycomb Filter
Reflector Colour	UV processed black cup Highly specular aluminium White Gold	UV processed black cup Highly specular aluminium White Gold	UV processed black cup Highly specular aluminium White Gold	UV processed black cup Highly specular aluminium White Gold	UV processed black cup Highly specular aluminium White Gold		UV processed black cup Highly specular aluminium White Gold	UV processed black cup Highly specular aluminium White Gold	UV processed black cup Highly specular aluminium White Gold	UV processed black cup Highly specular aluminium White Gold	UV processed black cup Highly specular aluminium White Gold	UV processed black cup Highly specular aluminium White Gold
Colour	White+Iron gray	White+Iron gray	White+Iron gray	White+Iron gray	White+Iron gray		White+Iron gray	White+Iron gray	White+Iron gray	White+Iron gray	White+Iron gray	White+Iron gray




K-CL38-2T-R2D

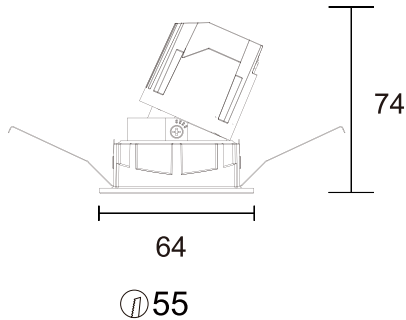


	Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	K-CL38-205T-R2D	5W	36V	120mA	90	2700K	18° 24° 36°	415lm 415lm 415lm	355lm 344lm 368lm	ON-OFF TRIAC 1-10V DALI
		5W	36V	120mA	90	3000K	18° 24° 36°	440lm 440lm 440lm	337lm 365lm 391lm	ON-OFF TRIAC 1-10V DALI
		5W	36V	120mA	90	4000K	18° 24° 36°	465lm 465lm 465lm	356lm 385lm 413lm	ON-OFF TRIAC 1-10V DALI
	K-CL38-207T-R2D	7W	36V	200mA	90	2700K	18° 24° 36°	515lm 515lm 515lm	430lm 465lm 460lm	ON-OFF TRIAC 1-10V DALI
		7W	36V	200mA	90	3000K	18° 24° 36°	550lm 550lm 550lm	460lm 497lm 492lm	ON-OFF TRIAC 1-10V DALI
		7W	36V	200mA	90	4000K	18° 24° 36°	582lm 582lm 582lm	486lm 524lm 520lm	ON-OFF TRIAC 1-10V DALI

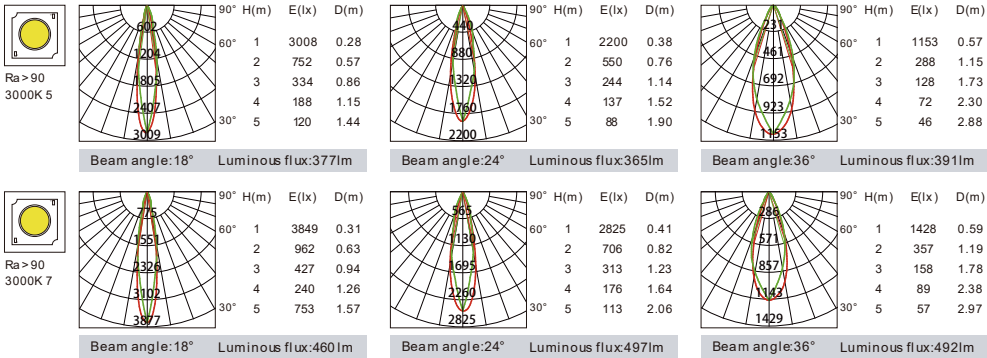


K-CL38-3F-R2D

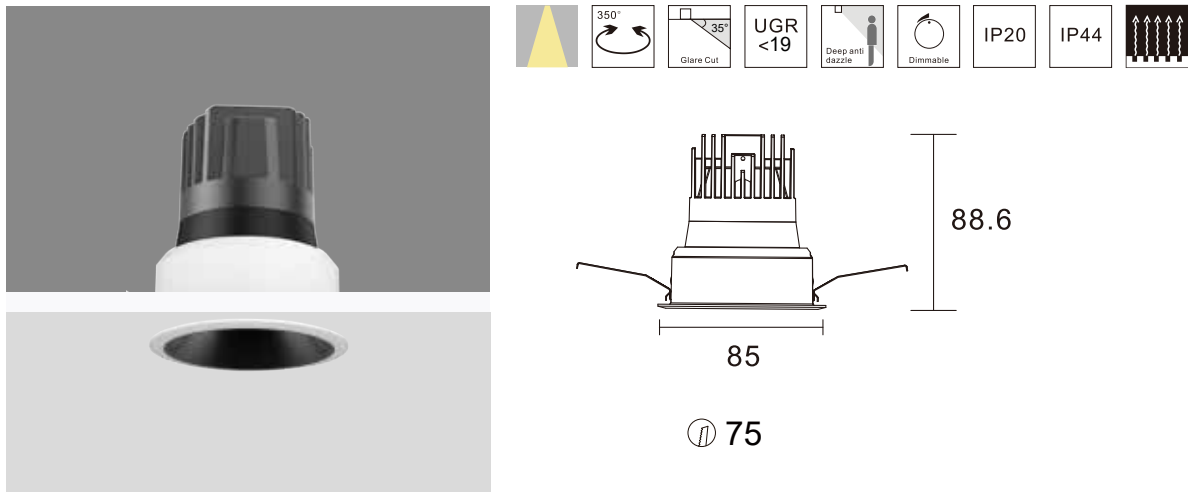


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
K-CL38-305F-R2D	5W	36V	120mA	90	2700K	11°	430lm	214lm	ON-OFF TRIAC 1-10V DALI
						15°	430lm	274lm	
						18°	430lm	255lm	
						24°	430lm	348lm	
						36°	430lm	324lm	
K-CL38-305T-R2D	5W	36V	120mA	90	3000K	50°	430lm	333lm	ON-OFF TRIAC 1-10V DALI
						11°	470lm	234lm	
						15°	470lm	300lm	
						18°	470lm	279lm	
						24°	470lm	381lm	
	5W	36V	120mA	90	4000K	36°	470lm	355lm	ON-OFF TRIAC 1-10V DALI
						50°	470lm	364lm	
						11°	490lm	243lm	
						15°	490lm	312lm	
						18°	490lm	290lm	
	5W	36V	120mA	90	4000K	24°	490lm	397lm	ON-OFF TRIAC 1-10V DALI
						36°	490lm	370lm	
						50°	490lm	379lm	

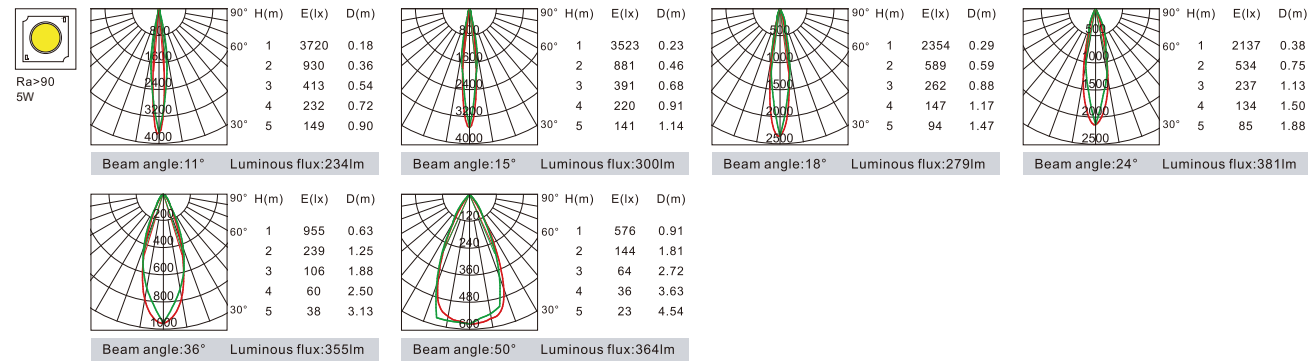


K-CL38-3T-R2D

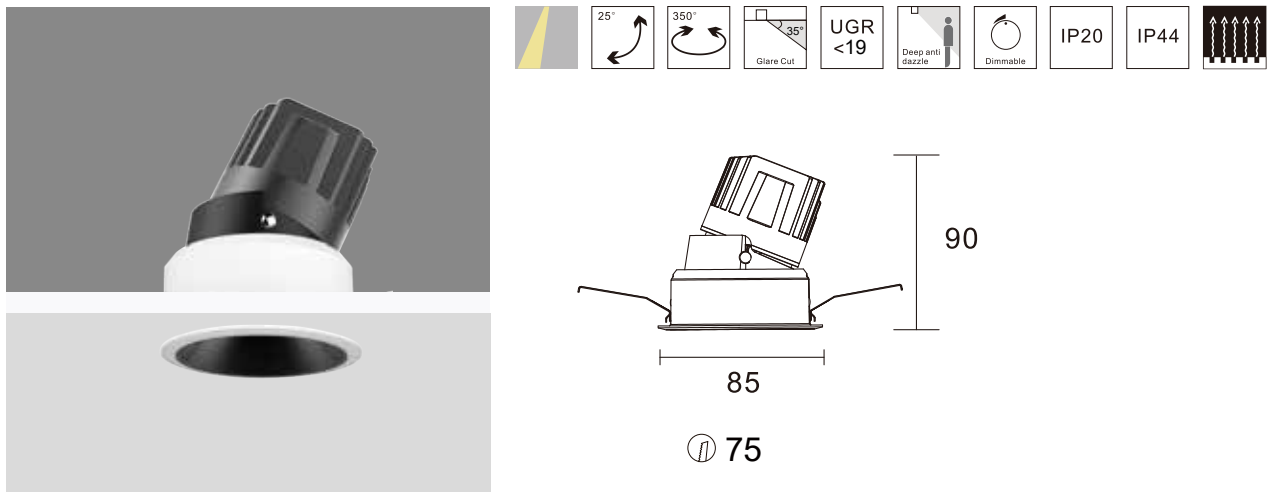


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
K-CL38-308F-R2D	8W	36V	200mA	90	2700K	11°	740lm	286lm	ON-OFF TRIAC 1-10V DALI
						15°	740lm	343lm	
						18°	740lm	315lm	
						24°	740lm	433lm	
						36°	740lm	413lm	
K-CL38-308T-R2D	8W	36V	200mA	90	3000K	50°	740lm	416lm	ON-OFF TRIAC 1-10V DALI
						11°	805lm	312lm	
						15°	805lm	374lm	
						18°	805lm	343lm	
						24°	805lm	472lm	
	8W	36V	200mA	90	4000K	36°	805lm	450lm	ON-OFF TRIAC 1-10V DALI
						50°	805lm	453lm	
						11°	850lm	329lm	
						15°	850lm	394lm	
						18°	850lm	362lm	
	8W	36V	200mA	90	4000K	24°	850lm	498lm	ON-OFF TRIAC 1-10V DALI
						36°	850lm	475lm	
						50°	850lm	478lm	

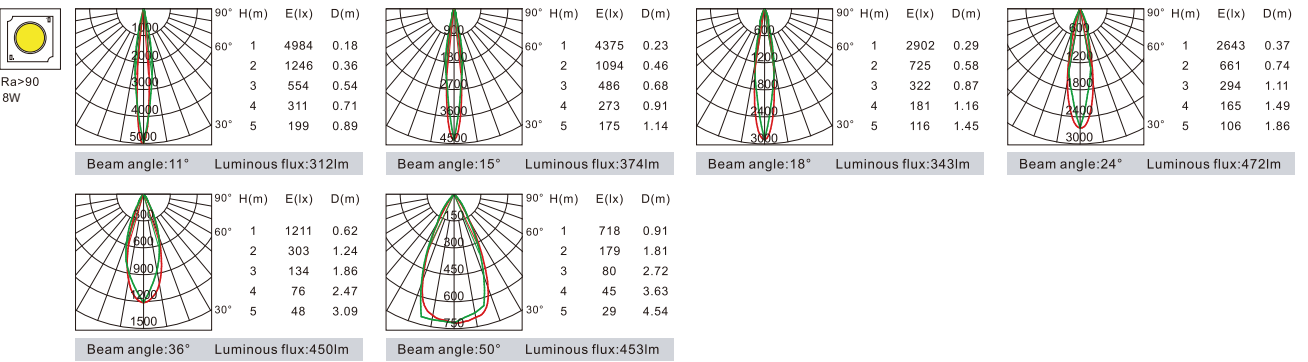


K-CL38-3F-R2D

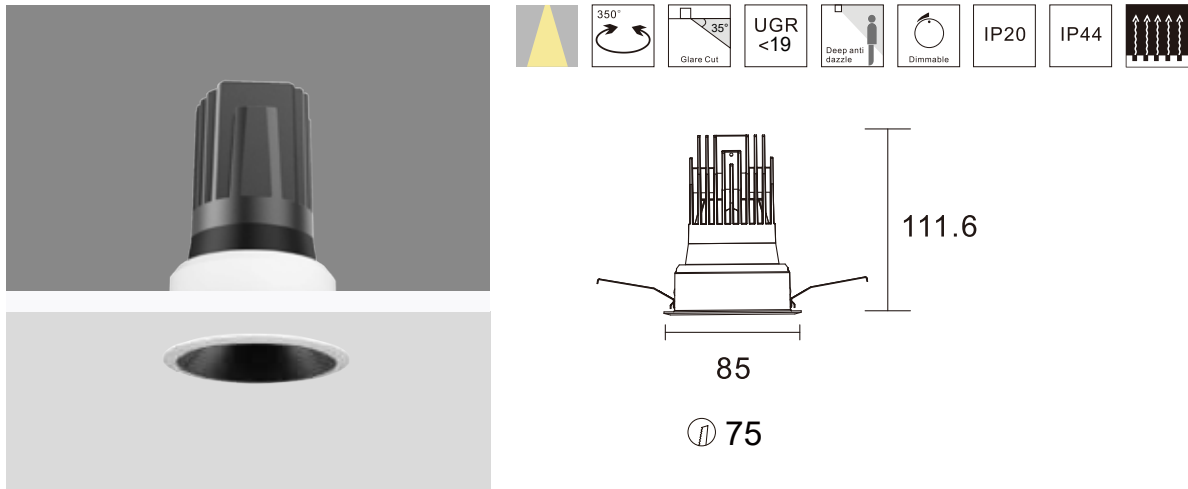


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 K-CL38-310F-R2D	10W	36V	250mA	90	2700K	11°	920lm	323lm	ON-OFF TRIAC 1-10V DALI
						15°	920lm	444lm	
						18°	920lm	413lm	
						24°	920lm	540lm	
						36°	920lm	524lm	
						50°	920lm	540lm	
 K-CL38-310T-R2D	10W	36V	250mA	90	3000K	11°	950lm	336lm	ON-OFF TRIAC 1-10V DALI
						15°	950lm	462lm	
						18°	950lm	430lm	
						24°	950lm	561lm	
						36°	950lm	545lm	
						50°	950lm	562lm	
	10W	36V	250mA	90	4000K	11°	1005lm	351lm	ON-OFF TRIAC 1-10V DALI
						15°	1005lm	483lm	
						18°	1005lm	450lm	
						24°	1005lm	587lm	
						36°	1005lm	570lm	
						50°	1005lm	588lm	

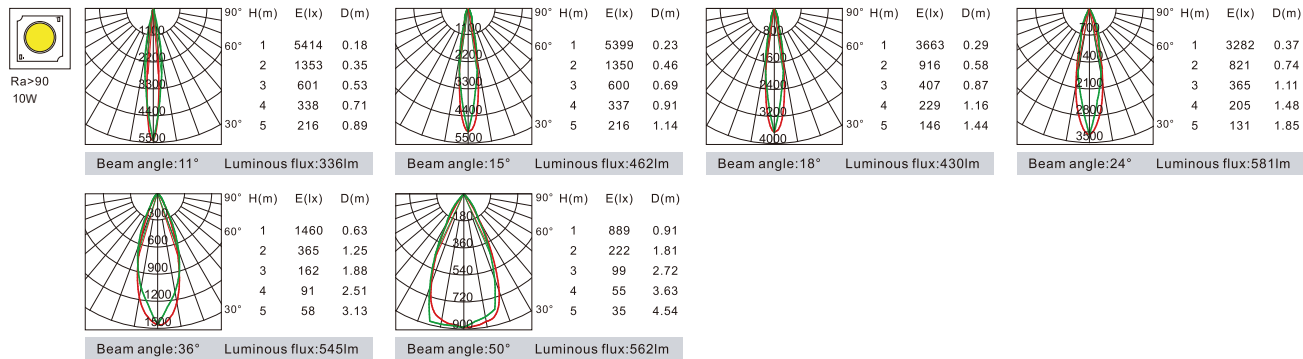


K-CL38-3T-R2D

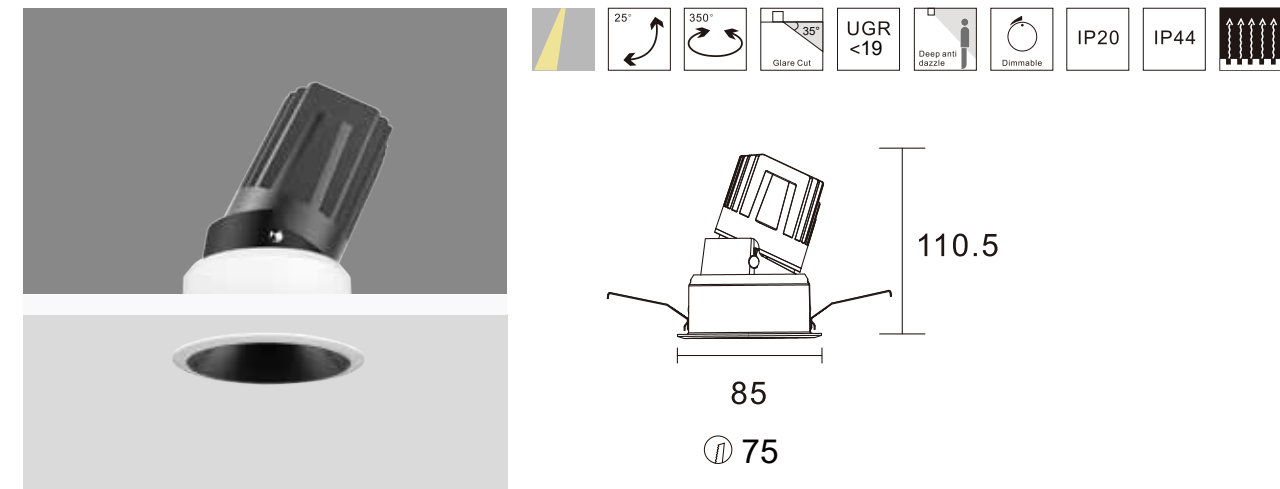

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 K-CL38-312F-R2D	12W	36V	300mA	90	2700K	15°	1080lm	509lm	ON-OFF TRIAC 1-10V DALI
						18°	1080lm	526lm	
						24°	1080lm	711lm	
						36°	1080lm	678lm	
						50°	1080lm	681lm	
						15°	1130lm	533lm	ON-OFF TRIAC 1-10V DALI
 K-CL38-312T-R2D	12W	36V	300mA	90	3000K	18°	1130lm	551lm	
						24°	1130lm	744lm	
						36°	1130lm	710lm	
						50°	1130lm	713lm	
						15°	1180lm	556lm	ON-OFF TRIAC 1-10V DALI
						18°	1180lm	575lm	
	12W	36V	300mA	90	4000K	24°	1180lm	776lm	
						36°	1180lm	741lm	
						50°	1180lm	744lm	
						18°	1230lm	622lm	ON-OFF TRIAC 1-10V DALI
						24°	1230lm	833lm	
						36°	1230lm	801lm	
 K-CL38-315F-R2D	15W	36V	350mA	90	2700K	50°	1230lm	808lm	
						18°	1300lm	658lm	ON-OFF TRIAC 1-10V DALI
						24°	1300lm	881lm	
						36°	1300lm	847lm	
						50°	1300lm	855lm	
						18°	1365lm	690lm	ON-OFF TRIAC 1-10V DALI
 K-CL38-315T-R2D	15W	36V	350mA	90	3000K	24°	1365lm	925lm	
						36°	1365lm	889lm	
						50°	1365lm	897lm	
						18°	1365lm	925lm	ON-OFF TRIAC 1-10V DALI
						24°	1365lm	889lm	
						36°	1365lm	897lm	

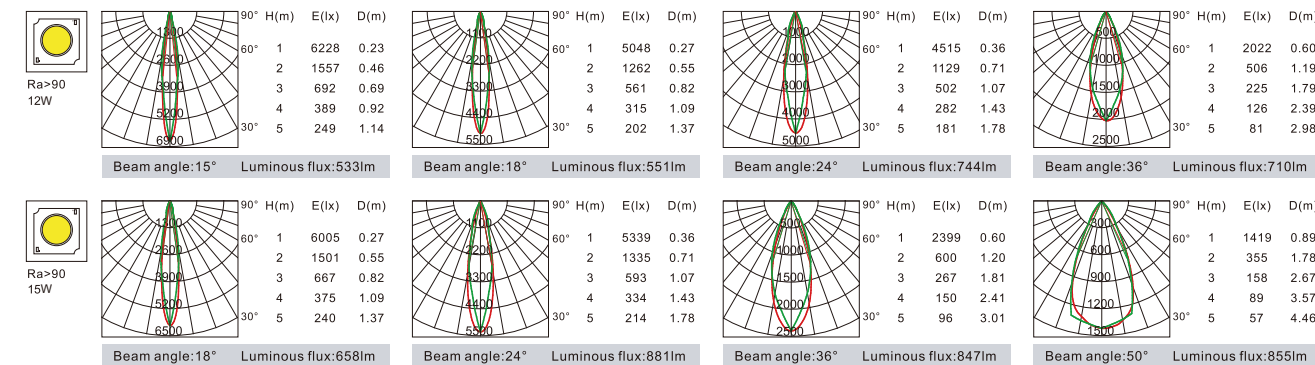


K-CL38-3F-R2D

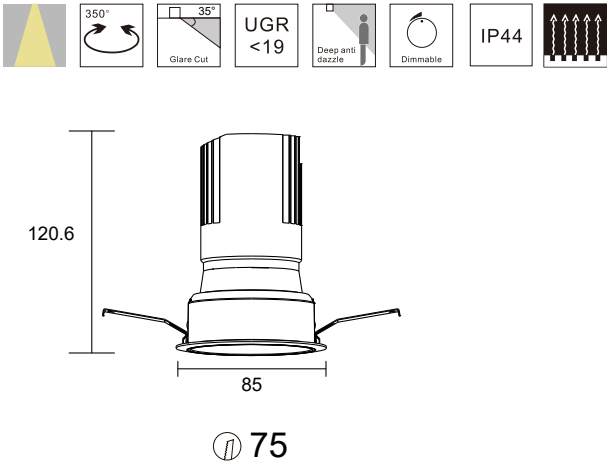




	Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	CL38-318F-R2D	18W	36V	450mA	90	2700K	15°	1620lm	1228lm	ON-OFF
							24°	1620lm	1244lm	TRIAC
							36°	1620lm	1246lm	1-10V
							50°	1620lm	1180lm	DALI
		18W	36V	450mA	90	3000K	15°	1744lm	1322lm	ON-OFF
							24°	1744lm	1340lm	TRIAC
							36°	1744lm	1342lm	1-10V
							50°	1744lm	1271lm	DALI
		18W	36V	450mA	90	4000K	15°	1851lm	1403lm	ON-OFF
							24°	1851lm	1422lm	TRIAC
							36°	1851lm	1424lm	1-10V
							50°	1851lm	1348lm	DALI

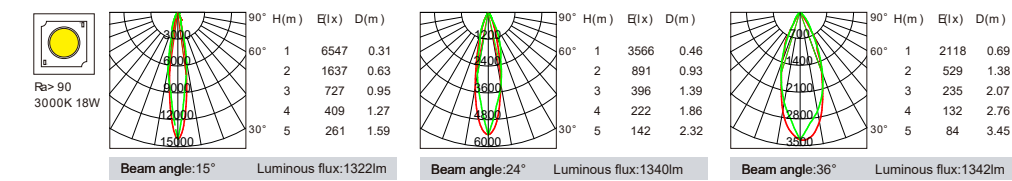


K-CL38-3T-R2D

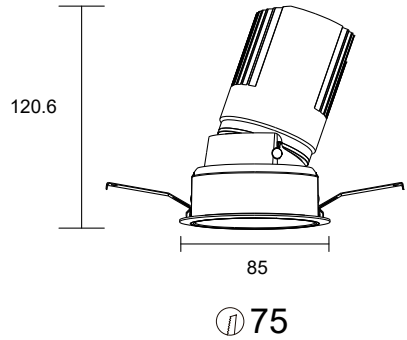





	Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	CL38-318T-R2D	18W	36V	450mA	90	2700K	15°	1620lm	1228lm	ON-OFF
							24°	1620lm	1244lm	TRIAC
							36°	1620lm	1246lm	1-10V
							50°	1620lm	1180lm	DALI
		18W	36V	450mA	90	3000K	15°	1744lm	1322lm	ON-OFF
							24°	1744lm	1340lm	TRIAC
							36°	1744lm	1342lm	1-10V
							50°	1744lm	1271lm	DALI
		18W	36V	450mA	90	4000K	15°	1851lm	1403lm	ON-OFF
							24°	1851lm	1422lm	TRIAC
							36°	1851lm	1424lm	1-10V
							50°	1851lm	1348lm	DALI

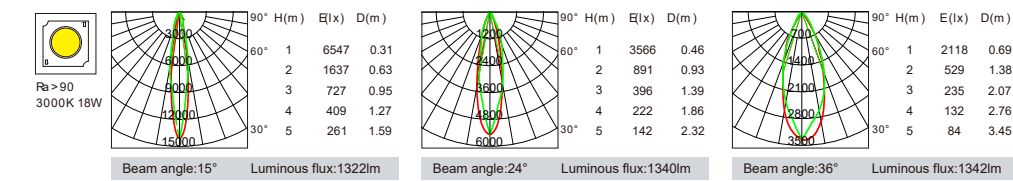


K-CL38-4F-R2D

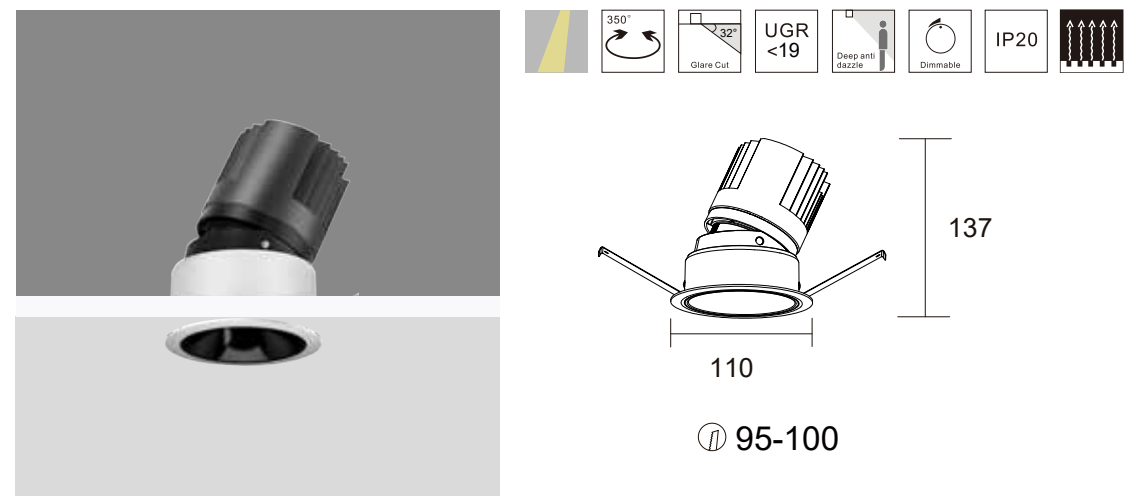


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
K-CL38-420T-R2D	20W	36V	500mA	90	2700K	10°	1950lm	1422lm	ON-OFF TRIAC 1-10V DALI
						15°	1950lm	1489lm	
						24°	1950lm	1722lm	
						36°	1950lm	1742lm	
						50°	1950lm	1457lm	
	20W	36V	500mA	90	3000K	10°	2070lm	1422lm	ON-OFF TRIAC 1-10V DALI
						15°	2070lm	1581lm	
						24°	2070lm	1828lm	
						36°	2070lm	1850lm	
						50°	2070lm	1547lm	
	20W	36V	500mA	90	4000K	10°	2200lm	1422lm	ON-OFF TRIAC 1-10V DALI
						15°	2200lm	1680lm	
						24°	2200lm	1942lm	
						36°	2200lm	1966lm	
						50°	2200lm	1644lm	

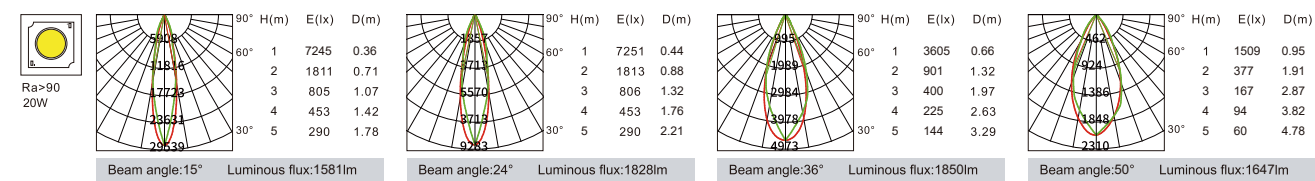



K-CL38-4T-R2D

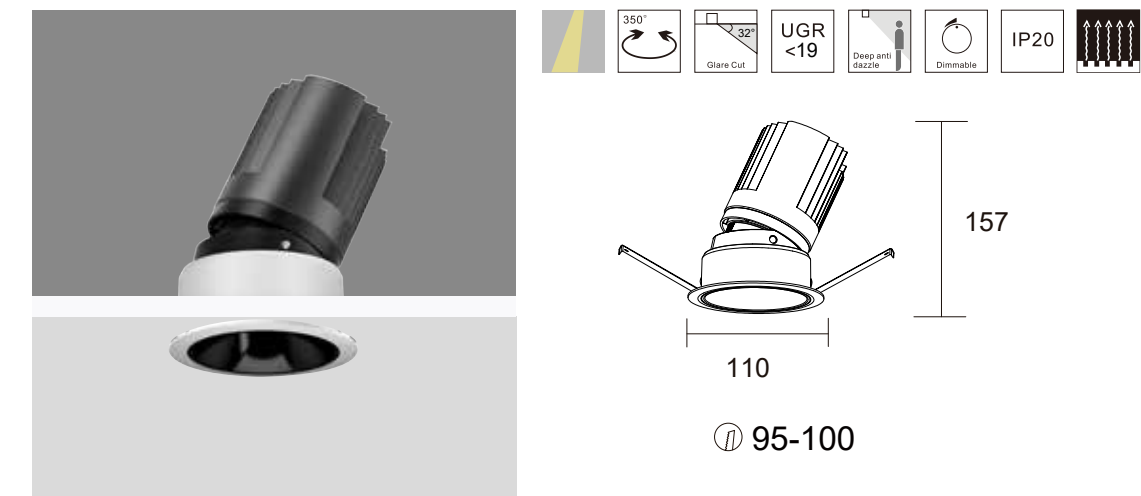


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
K-CL38-425T-R2D	25W	36V	600mA	90	2700K	10°	2320lm	1622lm	ON-OFF TRIAC 1-10V DALI
						15°	2320lm	1989lm	
						24°	2320lm	1963lm	
						36°	2320lm	2027lm	
						50°	2320lm	1802lm	
	25W	36V	600mA	90	3000K	10°	2480lm	1897lm	ON-OFF TRIAC 1-10V DALI
						15°	2480lm	2127lm	
						24°	2480lm	2099lm	
						36°	2480lm	2167lm	
						50°	2480lm	1927lm	
	25W	36V	600mA	90	4000K	10°	2590lm	1855lm	ON-OFF TRIAC 1-10V DALI
						15°	2590lm	2221lm	
						24°	2590lm	2192lm	
						36°	2590lm	2263lm	
						50°	2590lm	2010lm	
K-CL38-430T-R2D	30W	36V	700mA	90	2700K	10°	2650lm	1855lm	ON-OFF TRIAC 1-10V DALI
						15°	2650lm	2230lm	
						24°	2650lm	2538lm	
						36°	2650lm	2061lm	
						50°	2650lm	1941lm	
	30W	36V	700mA	90	3000K	10°	2890lm	2055lm	ON-OFF TRIAC 1-10V DALI
						15°	2890lm	2432lm	
						24°	2890lm	2328lm	
						36°	2890lm	2248lm	
						50°	2890lm	2117lm	
	30W	36V	700mA	90	4000K	10°	3000lm	2255lm	ON-OFF TRIAC 1-10V DALI
						15°	3000lm	2524lm	
						24°	3000lm	2416lm	
						36°	3000lm	2165lm	
						50°	3000lm	2197lm	

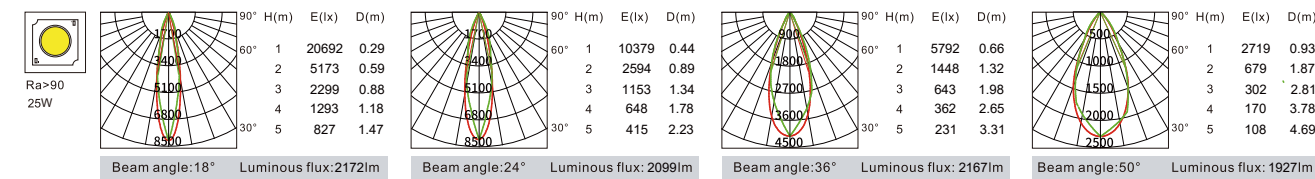



K-CL38-4540F-R2D




Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 K-CL38-4535F-R2D	35W	36V	800mA	90	2700K	18°	3400lm	2712lm	ON-OFF
						24°	3400lm	3136lm	TRIAC
						36°	3400lm	3126lm	1-10V
						50°	3400lm	2967lm	DALI
	35W	36V	800mA	90	3000K	18°	3700lm	2952lm	ON-OFF
						24°	3700lm	3413lm	TRIAC
						36°	3700lm	3402lm	1-10V
						50°	3700lm	3229lm	DALI
	35W	36V	800mA	90	4000K	18°	3820lm	3047lm	ON-OFF
						24°	3820lm	3523lm	TRIAC
						36°	3820lm	3512lm	1-10V
						50°	3820lm	3333lm	DALI
 K-CL38-4540F-R2D	40W	36V	900mA	90	2700K	18°	3780lm	3044lm	ON-OFF
						24°	3780lm	3454lm	TRIAC
						36°	3780lm	3544lm	1-10V
						50°	3780lm	3301lm	DALI
	40W	36V	900mA	90	3000K	18°	3960lm	3189lm	ON-OFF
						24°	3960lm	3619lm	TRIAC
						36°	3960lm	3713lm	1-10V
						50°	3960lm	3459lm	DALI
	40W	36V	900mA	90	4000K	18°	4180lm	3366lm	ON-OFF
						24°	4180lm	3820lm	TRIAC
						36°	4180lm	3919lm	1-10V
						50°	4180lm	3651lm	DALI

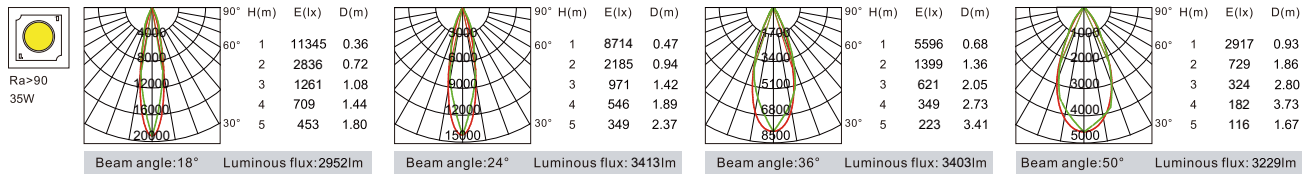


K-CL38-5T-R2S

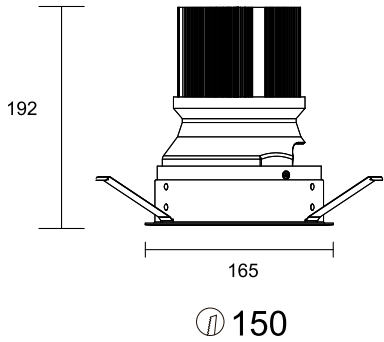


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 K-CL38-540F-R2S	40W	36V	1050mA	90	2700K	18°	4595lm	3476lm	ON-OFF
						24°	4595lm	3960lm	TRIAC
						36°	4595lm	3861lm	1-10V
						50°	4959lm	4435lm	DALI
	40W	36V	1050mA	90	3000K	18°	4777lm	3614lm	ON-OFF
						24°	4777lm	4117lm	TRIAC
						36°	4777lm	4014lm	1-10V
						50°	4777lm	4273lm	DALI
	40W	36V	1050mA	90	4000K	18°	5153lm	3898lm	ON-OFF
						24°	5153lm	4441lm	TRIAC
						36°	5153lm	4329lm	1-10V
						50°	5153lm	4609lm	DALI
 K-CL38-550F-R2S	50W	36V	1300mA	90	2700K	18°	5689lm	4387lm	ON-OFF
						24°	5689lm	4899lm	TRIAC
						36°	5689lm	5009lm	1-10V
						50°	5689lm	5104lm	DALI
	50W	36V	1300mA	90	3000K	18°	5915lm	4562lm	ON-OFF
						24°	5915lm	5094lm	TRIAC
						36°	5915lm	5209lm	1-10V
						50°	5915lm	5307lm	DALI
	50W	36V	1300mA	90	4000K	18°	6405lm	4939lm	ON-OFF
						24°	6405lm	5515lm	TRIAC
						36°	6405lm	5640lm	1-10V
						50°	6405lm	5746lm	DALI

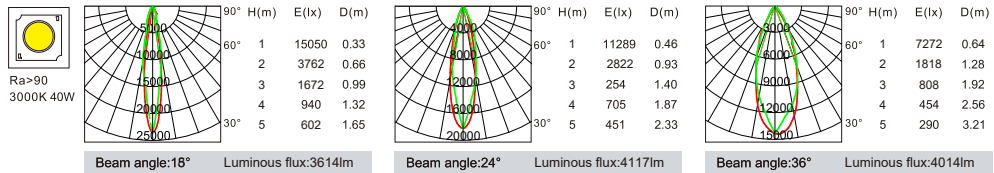


K-CL38-3F-R2R

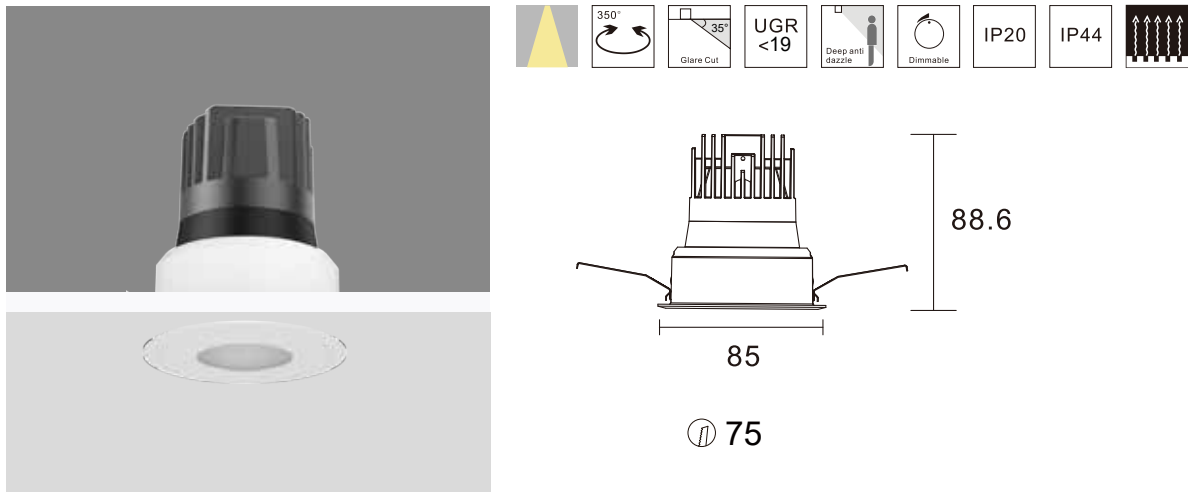


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 K-CL38-305F-R2R	5W	36V	120mA	90	2700K	11°	430lm	214lm	ON-OFF TRIAC 1-10V DALI
						15°	430lm	274lm	
						18°	430lm	255lm	
						24°	430lm	348lm	
						36°	430lm	324lm	
 K-CL38-305T-R2R	5W	36V	120mA	90	3000K	50°	430lm	333lm	ON-OFF TRIAC 1-10V DALI
						11°	470lm	234lm	
						15°	470lm	300lm	
						18°	470lm	279lm	
						24°	470lm	381lm	
	5W	36V	120mA	90	4000K	36°	470lm	355lm	ON-OFF TRIAC 1-10V DALI
						50°	470lm	364lm	
						11°	490lm	243lm	
						15°	490lm	312lm	
						18°	490lm	290lm	
	5W	36V	120mA	90	4000K	24°	490lm	397lm	ON-OFF TRIAC 1-10V DALI
						36°	490lm	370lm	
						50°	490lm	379lm	

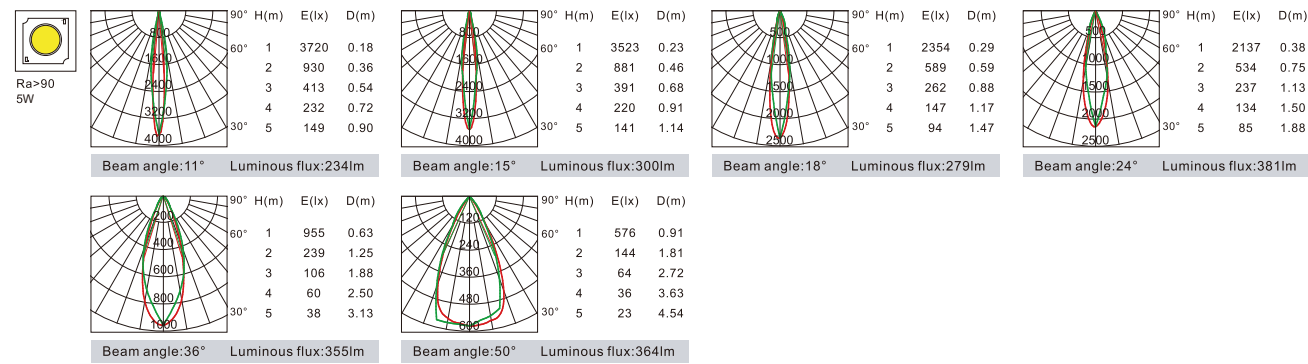


K-CL38-3T-R2R

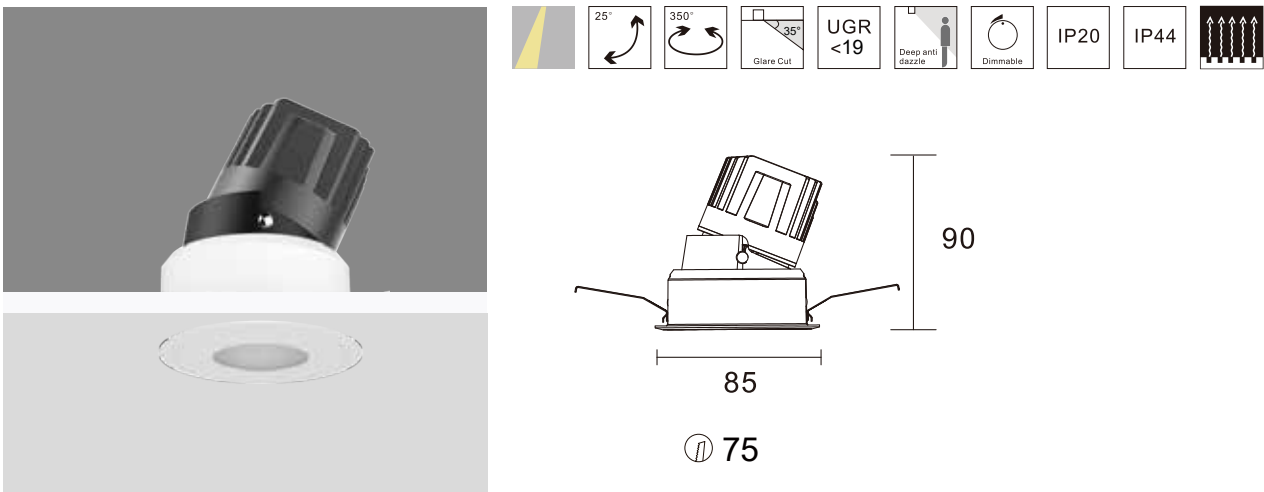


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 K-CL38-308F-R2R	8W	36V	200mA	90	2700K	11°	740lm	286lm	ON-OFF TRIAC 1-10V DALI
						15°	740lm	343lm	
						18°	740lm	315lm	
						24°	740lm	433lm	
						36°	740lm	413lm	
 K-CL38-308T-R2R	8W	36V	200mA	90	3000K	50°	740lm	416lm	ON-OFF TRIAC 1-10V DALI
						11°	805lm	312lm	
						15°	805lm	374lm	
						18°	805lm	343lm	
						24°	805lm	472lm	
	8W	36V	200mA	90	4000K	36°	805lm	450lm	ON-OFF TRIAC 1-10V DALI
						50°	805lm	453lm	
						11°	850lm	329lm	
						15°	850lm	394lm	
						18°	850lm	362lm	
	8W	36V	200mA	90	4000K	24°	850lm	498lm	ON-OFF TRIAC 1-10V DALI
						36°	850lm	475lm	
						50°	850lm	478lm	

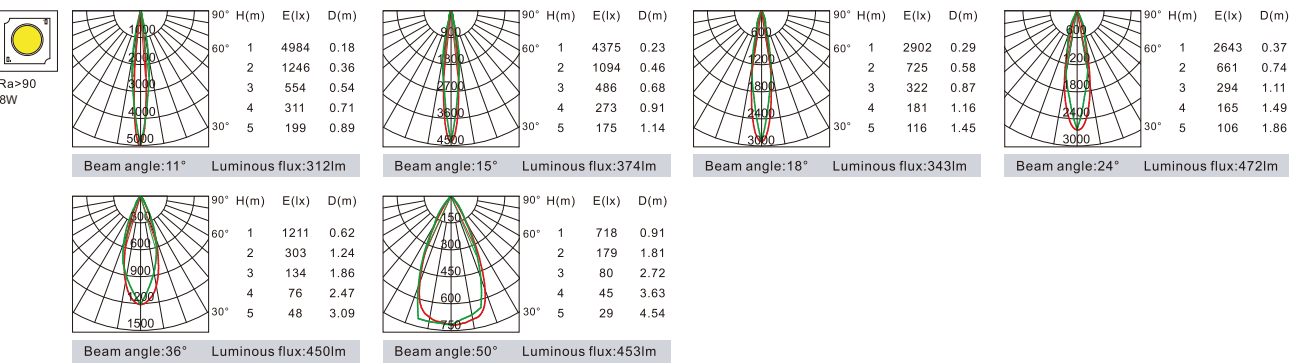


K-CL38-3F-R2R

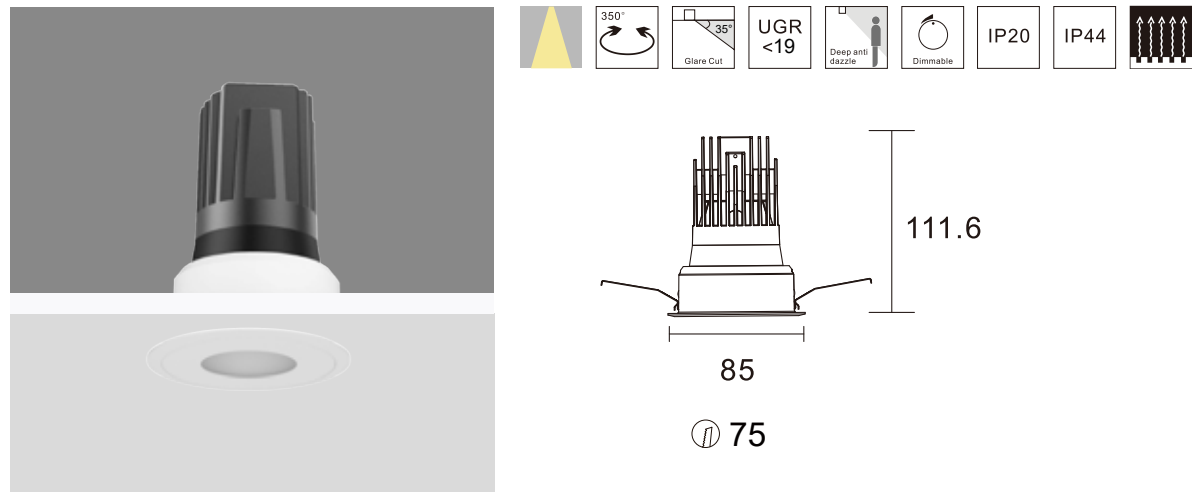


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
K-CL38-310F-R2R	10W	36V	250mA	90	2700K	11°	920lm	323lm	ON-OFF TRIAC 1-10V DALI
						15°	920lm	444lm	
						18°	920lm	413lm	
						24°	920lm	540lm	
						36°	920lm	524lm	
K-CL38-310T-R2R	10W	36V	250mA	90	3000K	50°	920lm	540lm	ON-OFF TRIAC 1-10V DALI
						11°	950lm	336lm	
						15°	950lm	462lm	
						18°	950lm	430lm	
						24°	950lm	561lm	
	10W	36V	250mA	90	4000K	36°	950lm	545lm	ON-OFF TRIAC 1-10V DALI
						50°	950lm	562lm	
						11°	1005lm	351lm	
						15°	1005lm	483lm	
						18°	1005lm	450lm	
	10W	36V	250mA	90	4000K	24°	1005lm	587lm	ON-OFF TRIAC 1-10V DALI
						36°	1005lm	570lm	
						50°	1005lm	588lm	

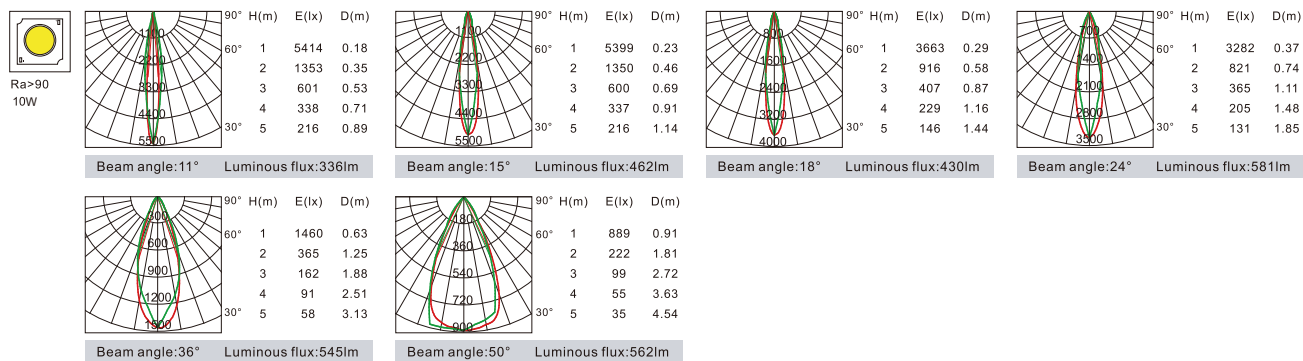


K-CL38-3T-R2R

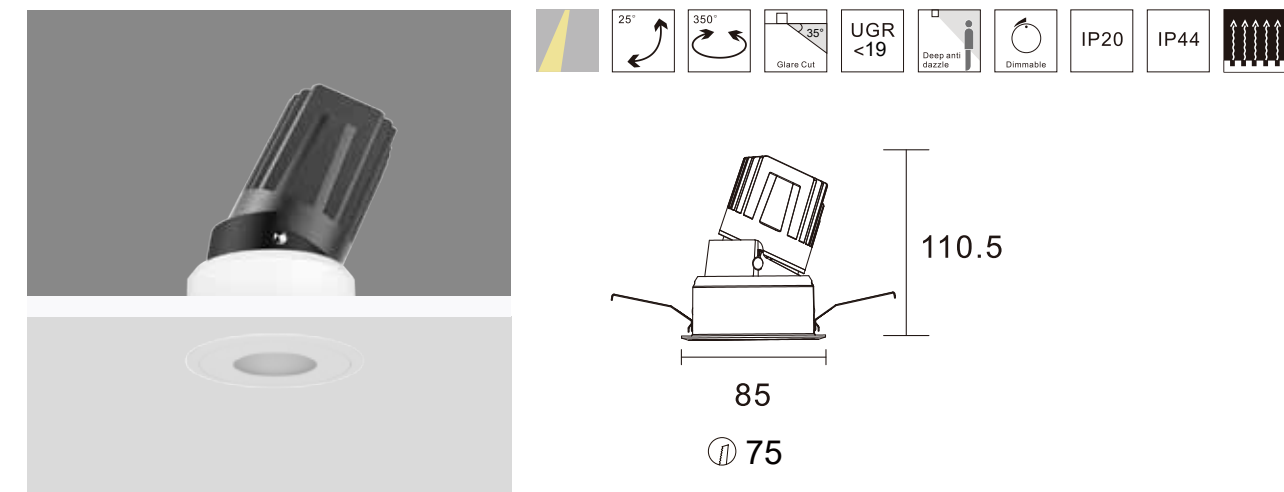


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
K-CL38-312F-R2R	12W	36V	300mA	90	2700K	15°	1080lm	509lm	ON-OFF TRIAC 1-10V DALI
						18°	1080lm	526lm	
						24°	1080lm	711lm	
						36°	1080lm	678lm	
						50°	1080lm	681lm	
K-CL38-312T-R2R	12W	36V	300mA	90	3000K	15°	1130lm	533lm	ON-OFF TRIAC 1-10V DALI
						18°	1130lm	551lm	
						24°	1130lm	744lm	
						36°	1130lm	710lm	
						50°	1130lm	713lm	
	12W	36V	300mA	90	4000K	15°	1180lm	556lm	ON-OFF TRIAC 1-10V DALI
						18°	1180lm	575lm	
						24°	1180lm	776lm	
						36°	1180lm	741lm	
						50°	1180lm	744lm	
K-CL38-315F-R2R	15W	36V	350mA	90	2700K	18°	1230lm	622lm	ON-OFF TRIAC 1-10V DALI
						24°	1230lm	833lm	
						36°	1230lm	801lm	
						50°	1230lm	808lm	
K-CL38-315T-R2R	15W	36V	350mA	90	3000K	18°	1300lm	658lm	ON-OFF TRIAC 1-10V DALI
						24°	1300lm	881lm	
						36°	1300lm	847lm	
						50°	1300lm	855lm	
	15W	36V	350mA	90	4000K	18°	1365lm	690lm	ON-OFF TRIAC 1-10V DALI
						24°	1365lm	925lm	
						36°	1365lm	889lm	
						50°	1365lm	897lm	

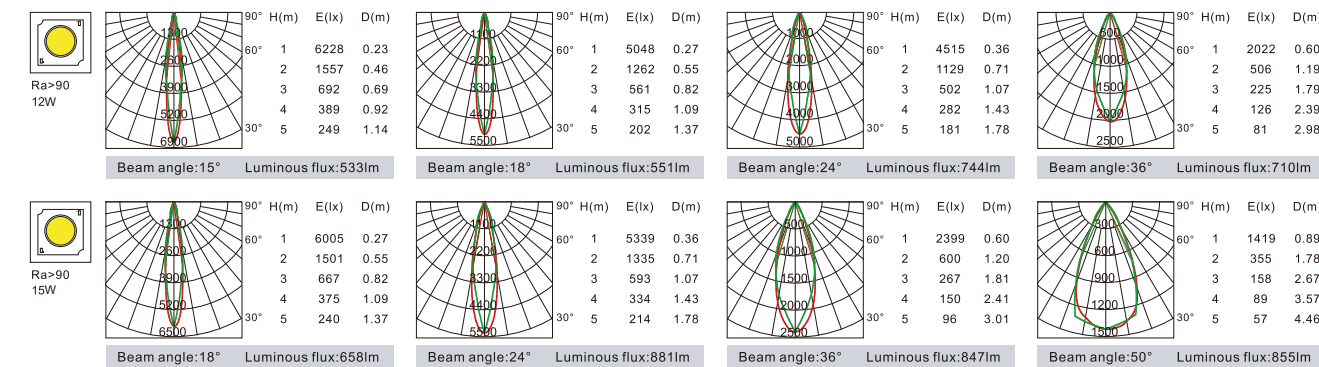


K-CL38-3F-R2E

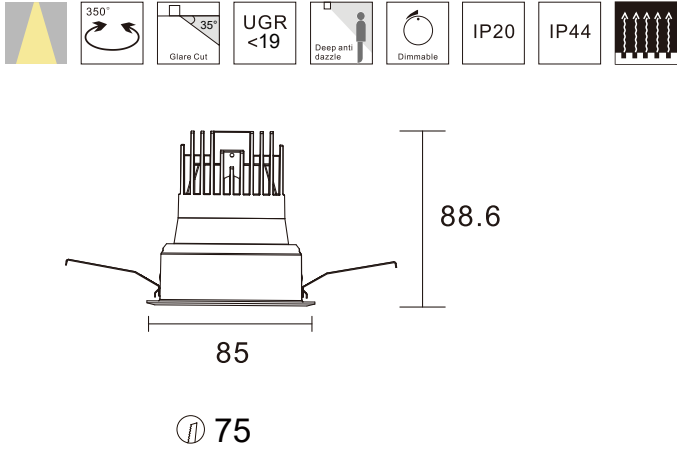


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 K-CL38-305F-R2E	5W	36V	120mA	90	2700K	11°	430lm	214lm	ON-OFF TRIAC 1-10V DALI
						15°	430lm	274lm	
						18°	430lm	255lm	
						24°	430lm	348lm	
						36°	430lm	324lm	
						50°	430lm	333lm	
 K-CL38-305T-R2E	5W	36V	120mA	90	3000K	11°	470lm	234lm	ON-OFF TRIAC 1-10V DALI
						15°	470lm	300lm	
						18°	470lm	279lm	
						24°	470lm	381lm	
						36°	470lm	355lm	
						50°	470lm	364lm	
	5W	36V	120mA	90	4000K	11°	490lm	243lm	ON-OFF TRIAC 1-10V DALI
						15°	490lm	312lm	
						18°	490lm	290lm	
						24°	490lm	397lm	
						36°	490lm	370lm	
						50°	490lm	379lm	

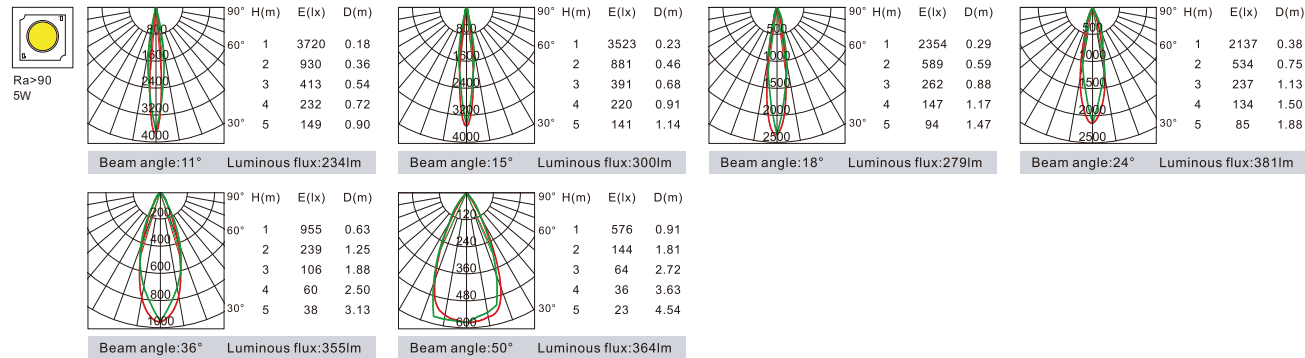


K-CL38-3T-R2E

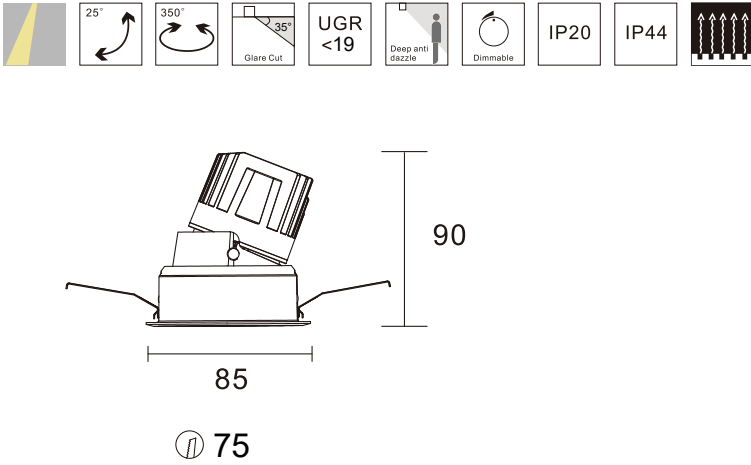


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 K-CL38-308F-R2E	8W	36V	200mA	90	2700K	11°	740lm	286lm	ON-OFF TRIAC 1-10V DALI
						15°	740lm	343lm	
						18°	740lm	315lm	
						24°	740lm	433lm	
						36°	740lm	413lm	
						50°	740lm	416lm	
 K-CL38-308T-R2E	8W	36V	200mA	90	3000K	11°	805lm	312lm	ON-OFF TRIAC 1-10V DALI
						15°	805lm	374lm	
						18°	805lm	343lm	
						24°	805lm	472lm	
						36°	805lm	450lm	
						50°	805lm	453lm	
	8W	36V	200mA	90	4000K	11°	850lm	329lm	ON-OFF TRIAC 1-10V DALI
						15°	850lm	394lm	
						18°	850lm	362lm	
						24°	850lm	498lm	
						36°	850lm	475lm	
						50°	850lm	478lm	

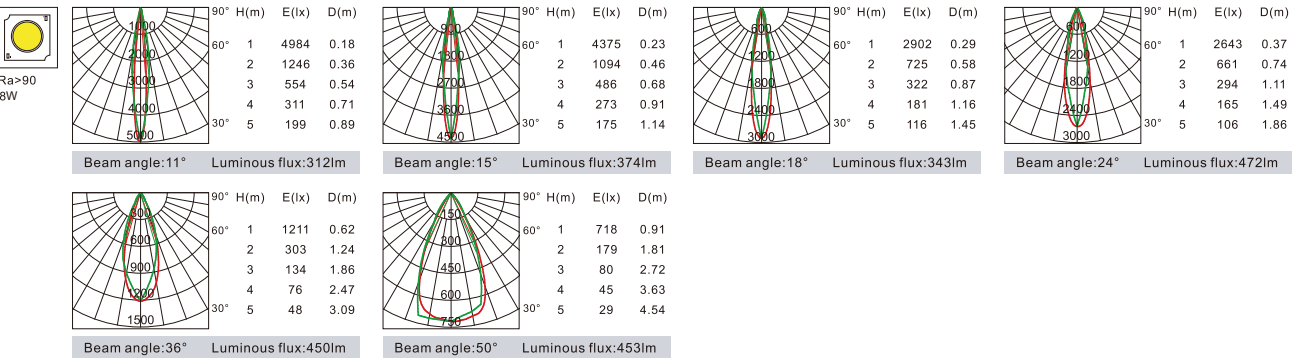


K-CL38-3F-R2E

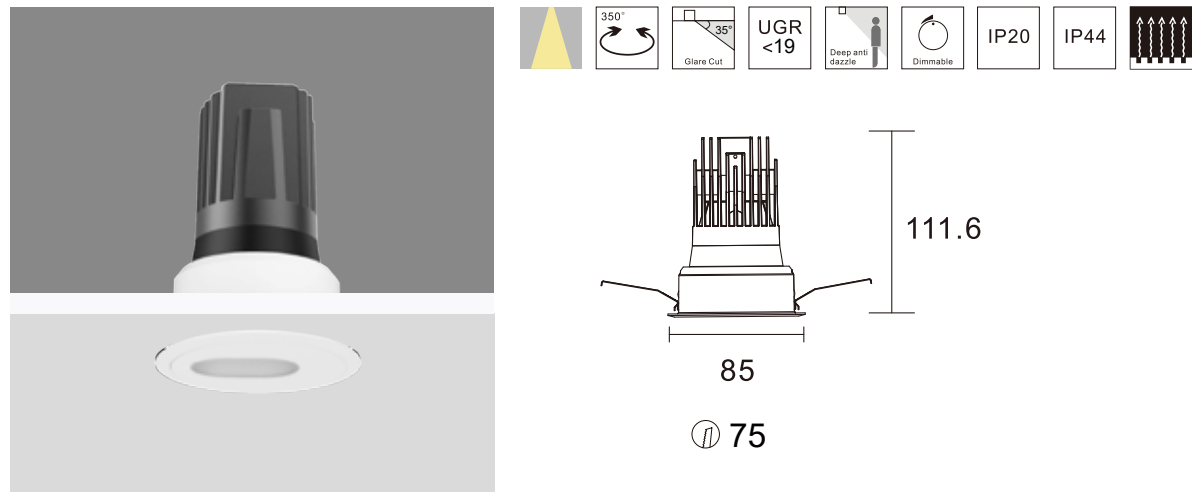


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
K-CL38-310F-R2E	10W	36V	250mA	90	2700K	11°	920lm	323lm	ON-OFF TRIAC 1-10V DALI
						15°	920lm	444lm	
						18°	920lm	413lm	
						24°	920lm	540lm	
						36°	920lm	524lm	
K-CL38-310T-R2E	10W	36V	250mA	90	3000K	50°	920lm	540lm	ON-OFF TRIAC 1-10V DALI
						11°	950lm	336lm	
						15°	950lm	462lm	
						18°	950lm	430lm	
						24°	950lm	561lm	
	10W	36V	250mA	90	4000K	36°	950lm	545lm	ON-OFF TRIAC 1-10V DALI
						50°	950lm	562lm	
						11°	1005lm	351lm	
						15°	1005lm	483lm	
						18°	1005lm	450lm	
	10W	36V	250mA	90	4000K	24°	1005lm	587lm	ON-OFF TRIAC 1-10V DALI
						36°	1005lm	570lm	
						50°	1005lm	588lm	

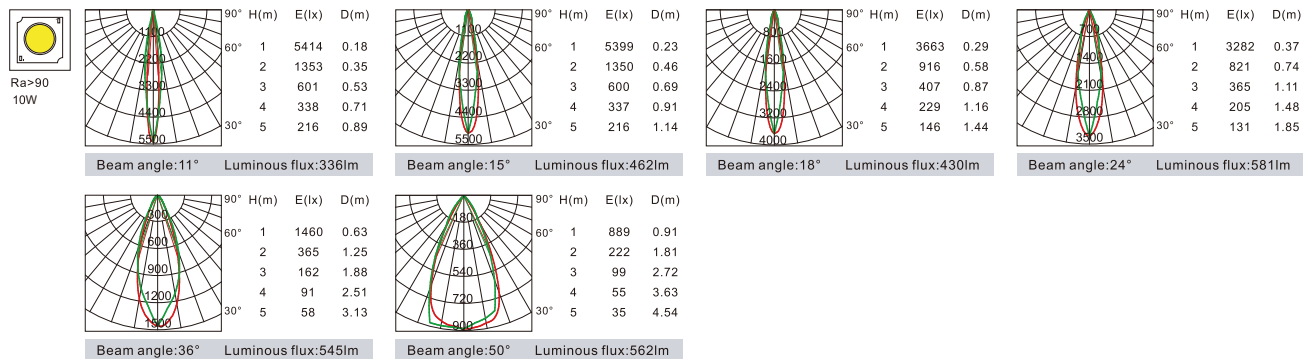

K-CL38-3T-R2E

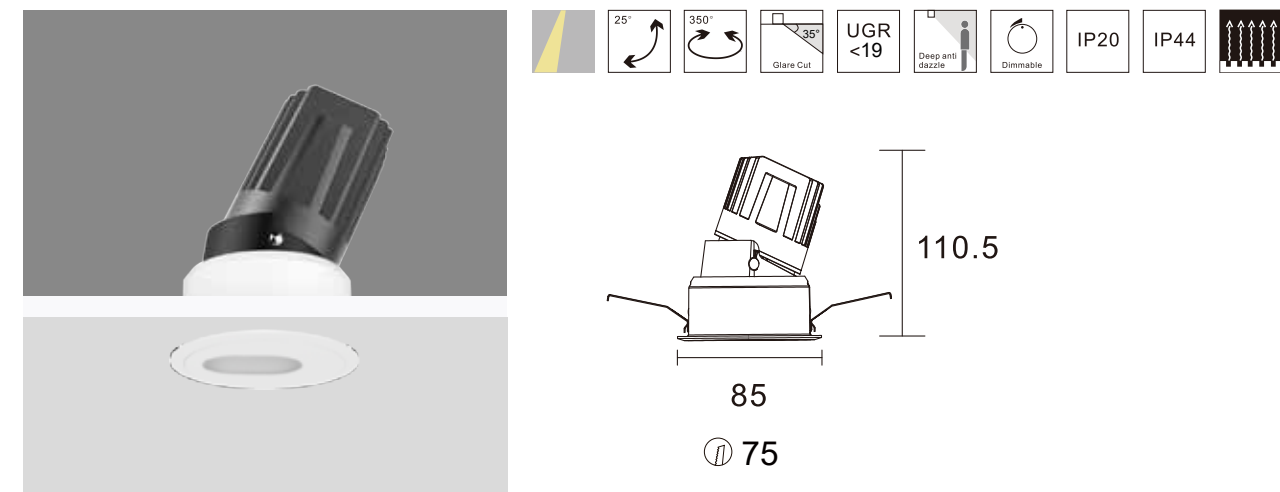

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
K-CL38-312F-R2E	12W	36V	300mA	90	2700K	15°	1080lm	509lm	ON-OFF TRIAC 1-10V DALI
						18°	1080lm	526lm	
						24°	1080lm	711lm	
						36°	1080lm	678lm	
						50°	1080lm	681lm	
K-CL38-312T-R2E	12W	36V	300mA	90	3000K	15°	1130lm	533lm	ON-OFF TRIAC 1-10V DALI
						18°	1130lm	551lm	
						24°	1130lm	744lm	
						36°	1130lm	710lm	
						50°	1130lm	713lm	
K-CL38-315F-R2E	12W	36V	300mA	90	4000K	15°	1180lm	556lm	ON-OFF TRIAC 1-10V DALI
						18°	1180lm	575lm	
						24°	1180lm	776lm	
						36°	1180lm	741lm	
						50°	1180lm	744lm	
K-CL38-315T-R2E	15W	36V	350mA	90	2700K	18°	1230lm	622lm	ON-OFF TRIAC 1-10V DALI
						24°	1230lm	833lm	
						36°	1230lm	801lm	
						50°	1230lm	808lm	
K-CL38-315T-R2E	15W	36V	350mA	90	3000K	18°	1300lm	658lm	ON-OFF TRIAC 1-10V DALI
						24°	1300lm	881lm	
						36°	1300lm	847lm	
						50°	1300lm	855lm	
K-CL38-315T-R2E	15W	36V	350mA	90	4000K	18°	1365lm	690lm	ON-OFF TRIAC 1-10V DALI
						24°	1365lm	925lm	
						36°	1365lm	889lm	
						50°	1365lm	897lm	

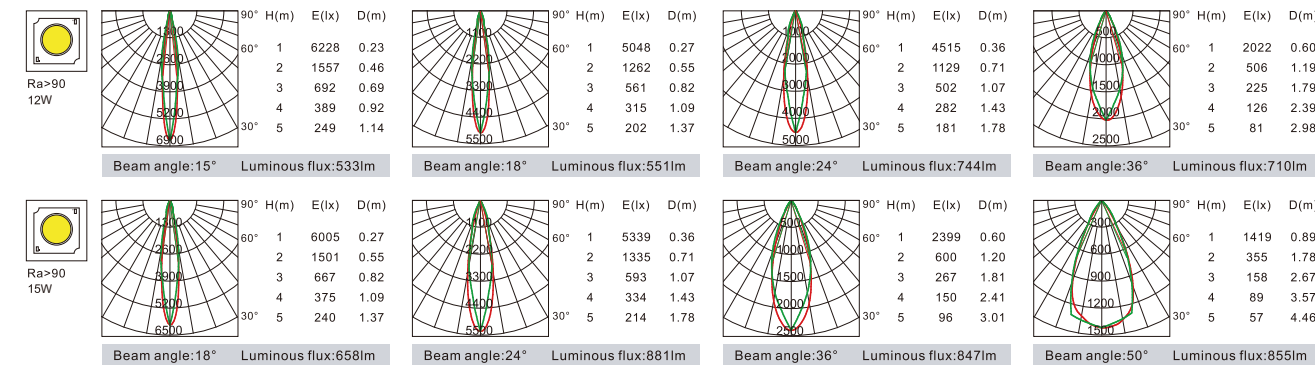



CL38 Series





- Outstanding color rendition effect, meet the lighting demand of upscale places. 2700K/3000K/4000K,Ra>90
- Dark light technology with chip deeply hidden, well-designed dark light reflector with UGR≤19.Comfortable and no glare.
- Die-casting aluminium heat sink, conducts the heat from the chip effectively, and ensure the lamp performance and long lifespan.
- Precise distribution and even transition.Less scattering makes vision more comfortable.





K-CL38S-206F-R2D
Power: 6W
Cutout: 55mm
Height: 42mm






K-CL38S-308F-R2D
Power: 8W
Cutout: 75mm
Height: 52mm





K-CL38S-310F-R2D
Power: 10W
Cutout: 75mm
Height: 52mm



K-CL38S-R2D

Model	K-CL38S-206F-R2D	K-CL38S-308F-R2D	K-CL38S-310F-R2D
Product Photo			
Dimension(mm)			
Cutout(mm)	55	75	75
Wattage	6W	8W	10W
CCT	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K
CRI	>90	>90	>90
Beam Angle	18°/24°/36°/50°	15°/24°/36°/50°	15°/24°/36°/50°
Lumen	257-332LM	470-491LM	537-649LM
IP	IP20	IP20	IP20
Dimming	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI
Reflector Colour	Highly specular aluminium UV processed black cup	Highly specular aluminium UV processed black cup	Highly specular aluminium UV processed black cup
Colour	White+Iron gray	White+Iron gray	White+Iron gray

K-CL38S-2F-R2D

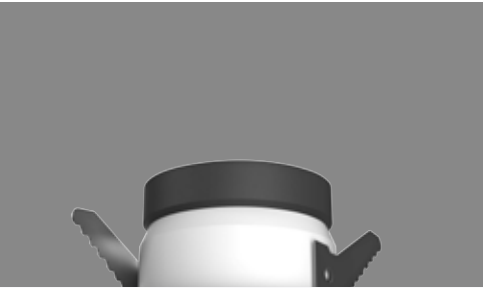

55




Honeycomb Filter Highly specular aluminium UV processed black cup Gold White


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 K-CL38S-206F-R2D	6W	36V	135mA	90	2700K	18°	395lm	242lm	ON-OFF
						24°	395lm	329lm	TRIAC
						36°	395lm	312lm	1-10V
						50°	395lm	304lm	DALI
	6W	36V	135mA	90	3000K	18°	419lm	257lm	ON-OFF
						24°	419lm	349lm	TRIAC
						36°	419lm	332lm	1-10V
						50°	419lm	323lm	DALI
	6W	36V	135mA	90	4000K	18°	455lm	279lm	ON-OFF
						24°	455lm	378lm	TRIAC
						36°	455lm	360lm	1-10V
						50°	455lm	350lm	DALI




Ra > 90
3000K 6W




Beam angle:18° Luminous flux:257lm



Beam angle:24° Luminous flux:349lm




Beam angle:36° Luminous flux:332lm




Beam angle:50° Luminous flux:323lm

K-CL38S-3F-R2D

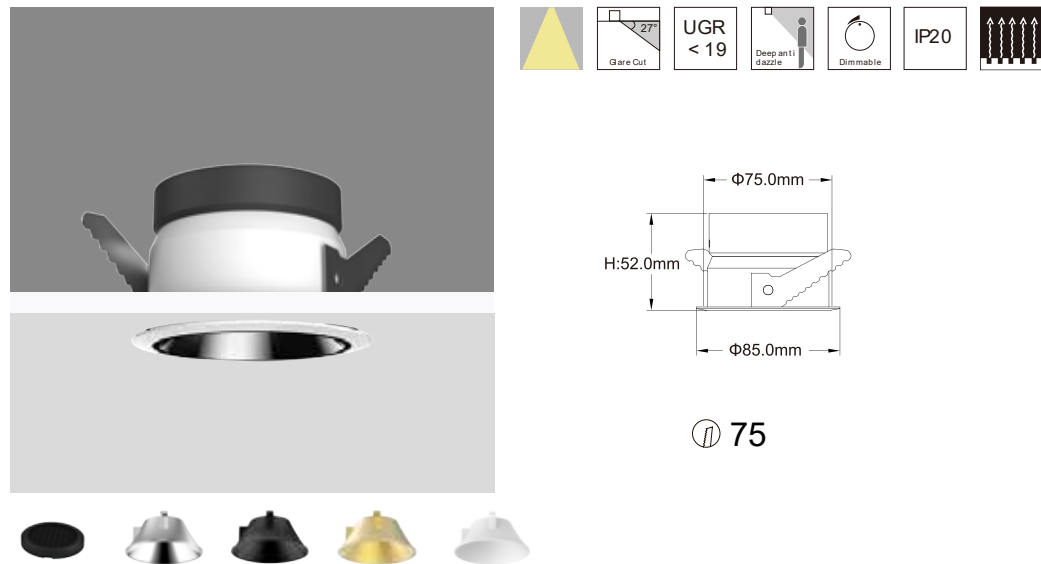


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	8W	36V	200mA	90	2700K	18°	740lm	451lm	ON-OFF
						24°	740lm	429lm	TRIAC
						36°	740lm	544lm	1-10V
						50°	740lm	471lm	DALI
	8W	36V	200mA	90	3000K	18°	770lm	470lm	ON-OFF
						24°	770lm	447lm	TRIAC
						36°	770lm	567lm	1-10V
						50°	770lm	491lm	DALI
	8W	36V	200mA	90	4000K	18°	806lm	491lm	ON-OFF
						24°	806lm	467lm	TRIAC
						36°	806lm	593lm	1-10V
						50°	806lm	513lm	DALI

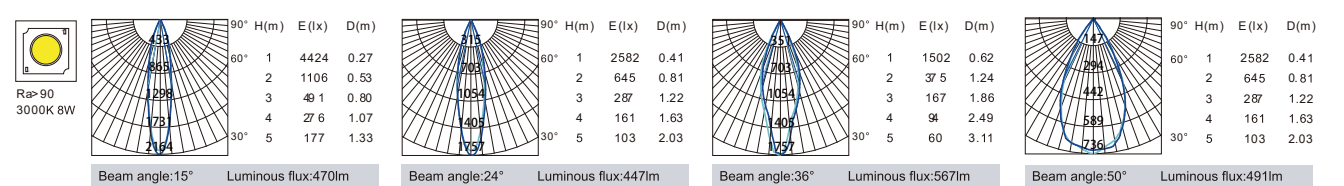


K-CL38S-3T-R2D



Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	10W	36V	250mA	90	2700K	18°	925lm	515lm	ON-OFF
						24°	925lm	534lm	TRIAC
						36°	925lm	623lm	1-10V
						50°	925lm	550lm	DALI
	10W	36V	250mA	90	3000K	18°	963lm	537lm	ON-OFF
						24°	963lm	556lm	TRIAC
						36°	963lm	649lm	1-10V
						50°	963lm	573lm	DALI
	10W	36V	250mA	90	4000K	18°	1005lm	560lm	ON-OFF
						24°	1005lm	580lm	TRIAC
						36°	1005lm	677lm	1-10V
						50°	1005lm	597lm	DALI

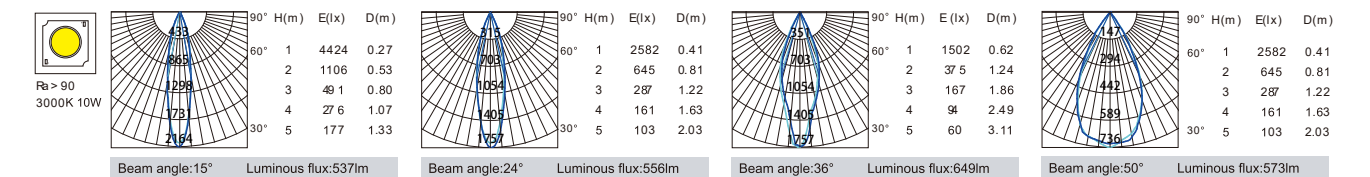









CL38 Series

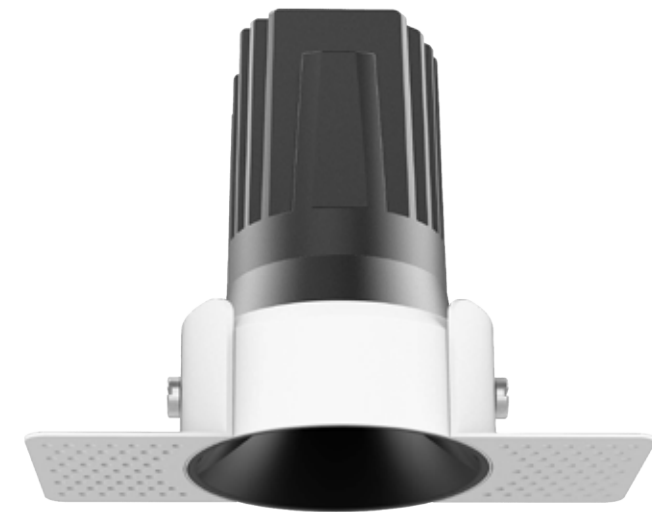







- Dark light technology with chip deeply hidden, well-designed dark light reflector with $UGR \leq 19$. Comfortable and no glare.
- Tens of reflectors in option, to satisfy designers requirements to different area and style.
- Precise distribution and even transition. Less scattering makes vision more comfortable.
- CL 38 series use a composable, alternative, modular, simple and elegant lamp body.

CL38 Series









K-CL38-3F-R3D Power : 5W/8W Cutout : 80mm Height: 90mm 	K-CL38-3F-R3D Power :10W/12W/ 15W Cutout: 80mm Height: 110mm 	K-CL38-3F-R4D Power : 5W/8W Cutout : 75mm Height: 88mm 	K-CL38-3F-R4D Power: 10W/ 12W/ 15W Cutout: 75mm Height: 110mm 	K-CL38-3T-R3D Power : 5W/8W Cutout : 80mm Height: 90mm 	K-CL38-3 T-R3D Power: 10W/ 12W/ 15W Cutout: 80mm Height: 110mm 	K-CL38-3 T-R4D Power : 5W/8W Cutout: 75mm Height: 90mm 	K-CL38-3 T-R4D Power : 10W/ 12W/ 15W Cutout: 75mm Height: 110mm 
--	--	--	---	--	--	--	---


CL38 Series

Model	K-CL38-3F-R4D	K-CL38-3F-R4D	K-CL38-3F-R4D		K-CL38-3F-R3D	K-CL38-3F-R3D	K-CL38-3F-R3D
Product Photo							
Dimension(mm)							
Cutout(mm)	75	75	75		80	80	80
Wattage	5W/8W	10W/12W/15W	18W		5W/8W	10W/12W/15W	18W
CCT	2700K 3000K 4000K 5000K	2700K 3000K 4000K 5000K	2700K 3000K 4000K 5000K		2700K 3000K 4000K 5000K	2700K 3000K 4000K 5000K	2700K 3000K 4000K 5000K
CRI	>90	>90	>90		>90	>90	>90
Beam Angle	11°/15°/18°/24°/36°/50°	11°/15°/18°/24°/36°/50°	15°/18°/24°/36°/50°		11°/15°/18°/24°/36°/50°	11°/15°/18°/24°/36°/50°	15°/24°/36°/50°
Lumen	214-498LM	323-985LM	1176-1445LM		214-498LM	600-880LM	1174-1470LM
IP	IP20/IP44	IP20/IP44	IP20/IP44		IP20/IP44	IP20/IP44	IP44
Dimming	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI		TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI
Accessory	Honeycomb Filter	Honeycomb Filter	Honeycomb Filter		Honeycomb Filter	Honeycomb Filter	Honeycomb Filter
Reflector Colour	UV processed black cup Highly specular aluminium White Gold	UV processed black cup Highly specular aluminium White Gold	UV processed black cup Highly specular aluminium White Gold		UV processed black cup Highly specular aluminium White Gold	UV processed black cup Highly specular aluminium White Gold	UV processed black cup Highly specular aluminium White Gold
Colour	White+Iron gray	White+Iron gray	White+Iron gray		White+Iron gray	White+Iron gray	White+Iron gray


CL38 Series

Model	K-CL38-3T-R3D	K-CL38-3T-R3D	K-CL38-3T-R3D		K-CL38-3T-R4D	K-CL38-3T-R4D	K-CL38-3T-R4D
Product Photo							
Dimension(mm)							
Cutout(mm)	80	80	80		75	75	75
Wattage	5W/8W	10W/12W/15W	18W		5W/8W	10W/12W/15W	18W
CCT	2700K 3000K 4000K 5000K	2700K 3000K 4000K 5000K	2700K 3000K 4000K 5000K		2700K 3000K 4000K 5000K	2700K 3000K 4000K 5000K	2700K 3000K 4000K 5000K
CRI	>90	>90	>90		>90	>90	>90
Beam Angle	11°/15°/18°/24°/36°/50°	11°/15°/18°/24°/36°/50°	15°/24°/36°/50°		11°/15°/18°/24°/36°/50°	11°/15°/18°/24°/36°/50°	15°/18°/24°/36°/50°
Lumen	214-498LM	600-880LM	1174-1470LM		214-498LM	323-985LM	1176-1445LM
IP	IP20/IP44	IP20/IP44	IP44		IP20/IP44	IP20/IP44	IP20/IP44
Dimming	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI		TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI
Accessory	Honeycomb Filter	Honeycomb Filter	Honeycomb Filter		Honeycomb Filter	Honeycomb Filter	Honeycomb Filter
Reflector Colour	UV processed black cup Highly specular aluminium White Gold	UV processed black cup Highly specular aluminium White Gold	UV processed black cup Highly specular aluminium White Gold		UV processed black cup Highly specular aluminium White Gold	UV processed black cup Highly specular aluminium White Gold	UV processed black cup Highly specular aluminium White Gold
Colour	White+Iron gray	White+Iron gray	White+Iron gray		White+Iron gray	White+Iron gray	White+Iron gray


K-CL38-3F-R3D

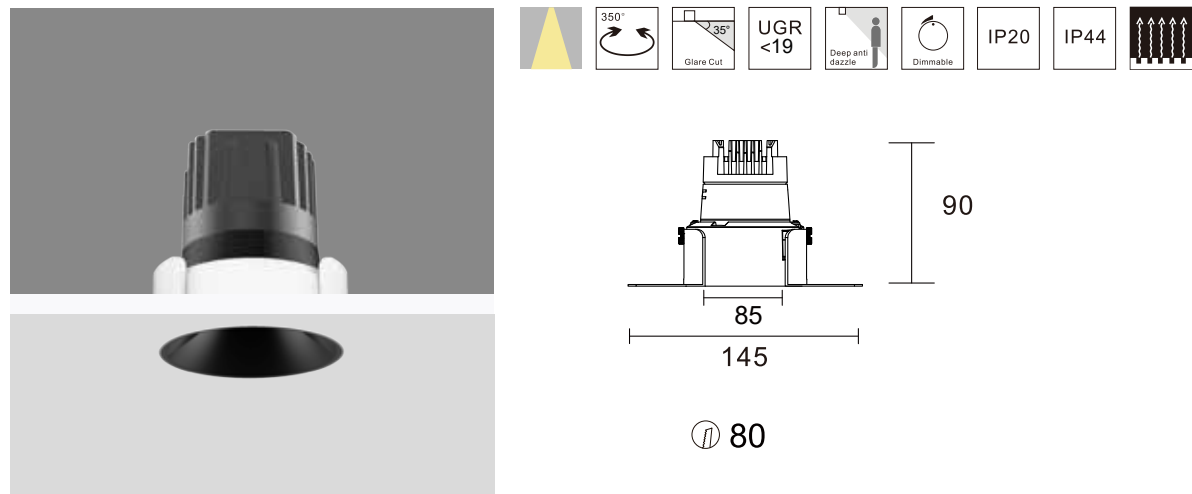


	Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type	
	K-CL38-305F-R3D	5W	36V	120mA	90	2700K	11°	430lm	214lm	ON-OFF TRIAC 1-10V DALI	
							15°	430lm	274lm		
							18°	430lm	255lm		
							24°	430lm	348lm		
							36°	430lm	324lm		
	K-CL38-305T-R3D						50°	430lm	333lm		
							11°	470lm	234lm		ON-OFF TRIAC 1-10V DALI
							15°	470lm	300lm		
							18°	470lm	279lm		
							24°	470lm	381lm		
36°	470lm	355lm									
		5W	36V	120mA	90	3000K	50°	470lm	364lm		
							11°	490lm	243lm		ON-OFF TRIAC 1-10V DALI
							15°	490lm	312lm		
							18°	490lm	290lm		
							24°	490lm	397lm		
36°	490lm	370lm									
		5W	36V	120mA	90	4000K	50°	490lm	379lm		
							11°	490lm	243lm		ON-OFF TRIAC 1-10V DALI
							15°	490lm	312lm		
							18°	490lm	290lm		
							24°	490lm	397lm		
36°	490lm	370lm									

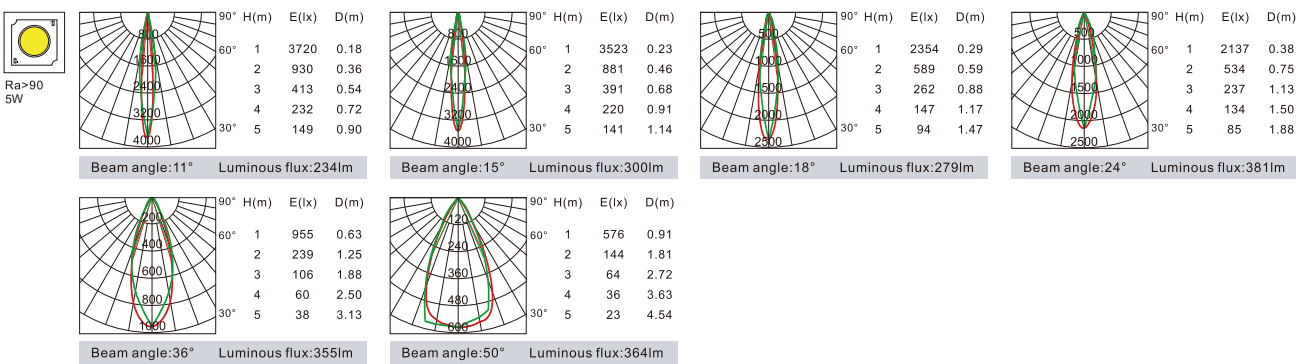


K-CL38-3T-R3D

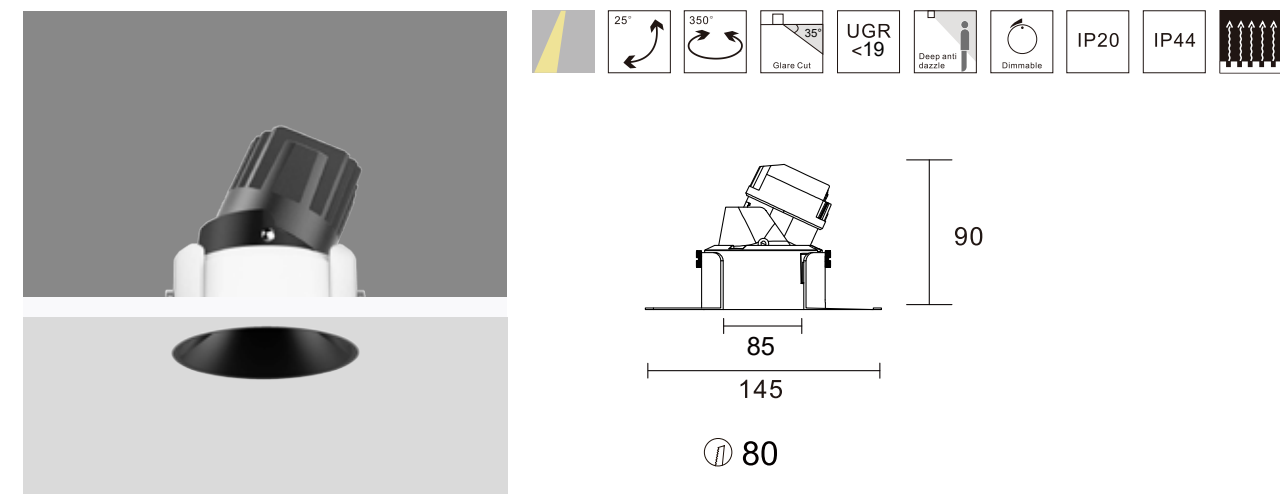


	Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	K-CL38-308F-R3D	8W	36V	200mA	90	2700K	11°	740lm	286lm	ON-OFF TRIAC 1-10V DALI
							15°	740lm	343lm	
							18°	740lm	315lm	
							24°	740lm	433lm	
							36°	740lm	413lm	
	K-CL38-308T-R3D	8W	36V	200mA	90	3000K	50°	740lm	416lm	ON-OFF TRIAC 1-10V DALI
							11°	805lm	312lm	
							15°	805lm	374lm	
							18°	805lm	343lm	
							24°	805lm	472lm	
36°	805lm	450lm								
		8W	36V	200mA	90	4000K	50°	805lm	453lm	ON-OFF TRIAC 1-10V DALI
							11°	850lm	329lm	
							15°	850lm	394lm	
							18°	850lm	362lm	
							24°	850lm	498lm	
36°	850lm	475lm								
50°	850lm	478lm								

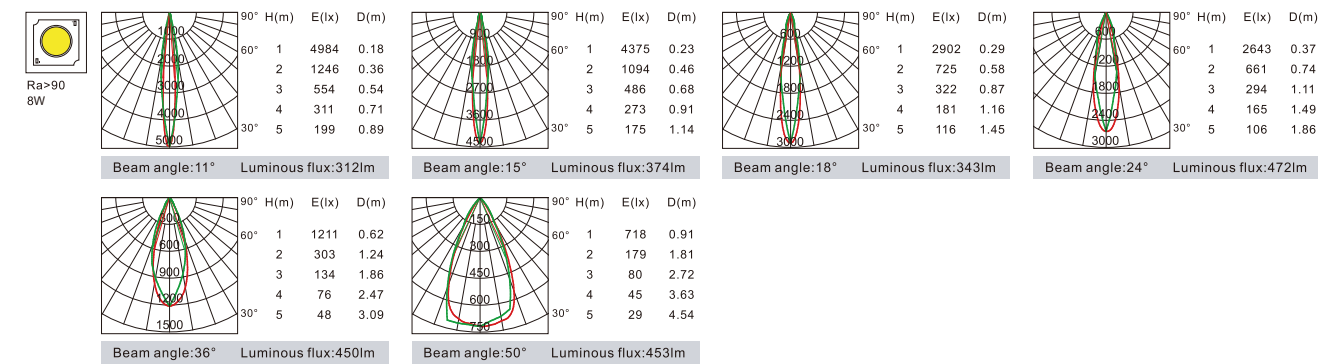


K-CL38-3F-R3D

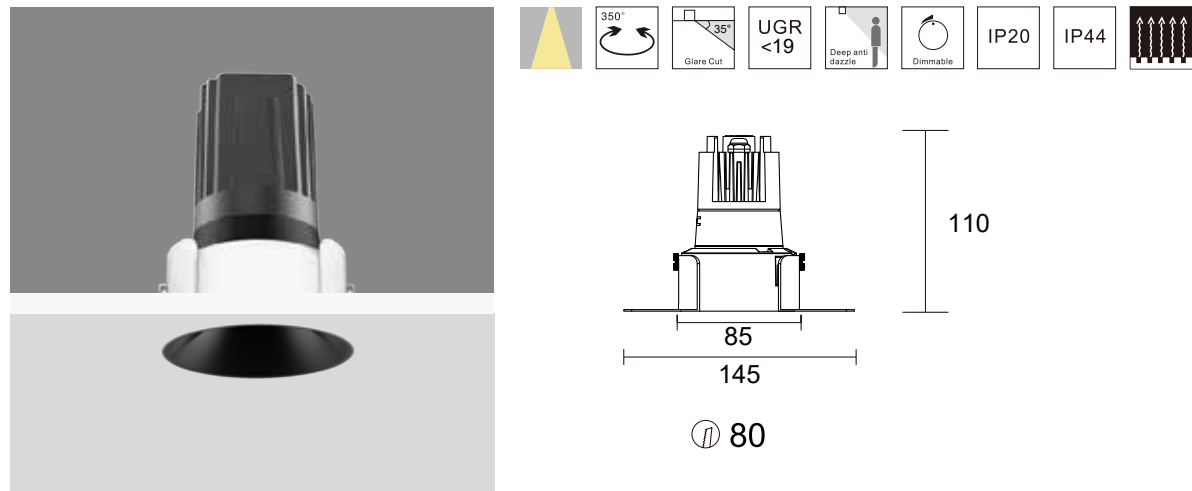


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
K-CL38-310F-R3D	10W	36V	250mA	90	2700K	11°	920lm	323lm	ON-OFF TRIAC 1-10V DALI
						15°	920lm	444lm	
						18°	920lm	413lm	
						24°	920lm	540lm	
						36°	920lm	524lm	
						50°	920lm	540lm	
K-CL38-310T-R3D	10W	36V	250mA	90	3000K	11°	950lm	336lm	ON-OFF TRIAC 1-10V DALI
						15°	950lm	462lm	
						18°	950lm	430lm	
						24°	950lm	561lm	
						36°	950lm	545lm	
						50°	950lm	562lm	
K-CL38-310T-R3D	10W	36V	250mA	90	4000K	11°	1005lm	351lm	ON-OFF TRIAC 1-10V DALI
						15°	1005lm	483lm	
						18°	1005lm	450lm	
						24°	1005lm	587lm	
						36°	1005lm	570lm	
						50°	1005lm	588lm	

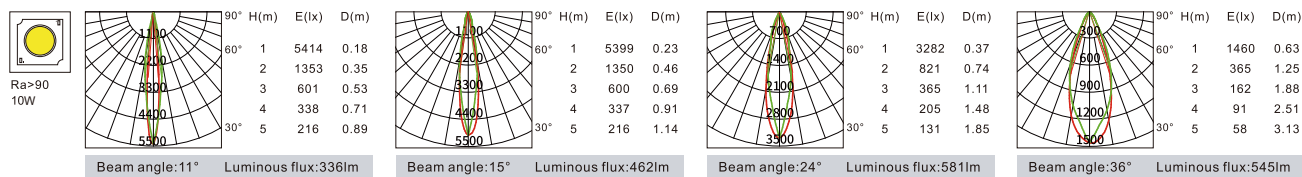


K-CL38-3T-R3D

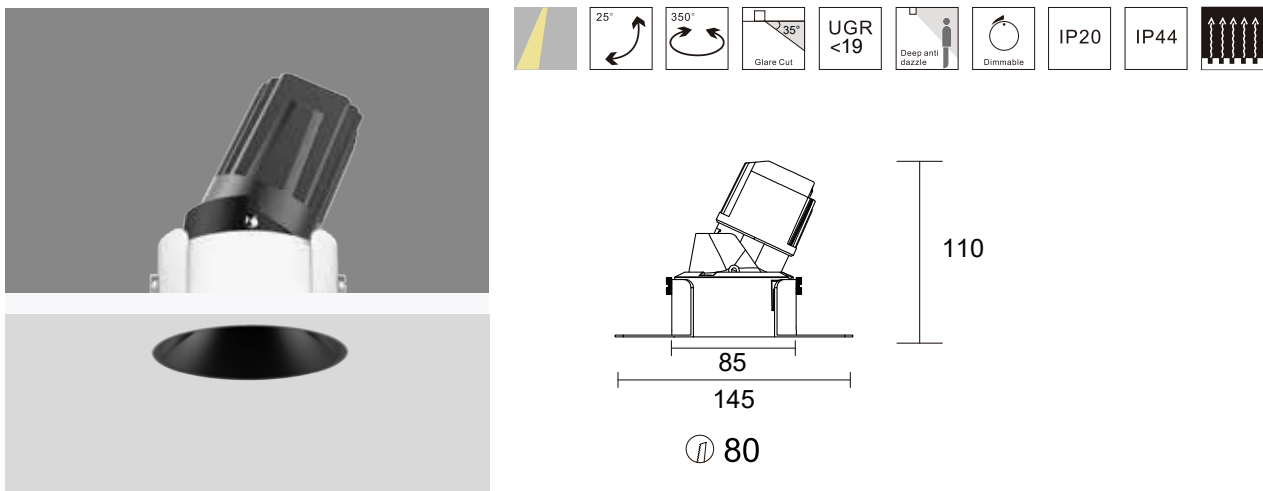

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
K-CL38-312F-R3D	12W	36V	300mA	90	2700K	15°	1080lm	509lm	ON-OFF TRIAC 1-10V DALI
						18°	1080lm	526lm	
						24°	1080lm	711lm	
						36°	1080lm	678lm	
						50°	1080lm	681lm	
						15°	1130lm	533lm	ON-OFF TRIAC 1-10V DALI
K-CL38-312T-R3D	12W	36V	300mA	90	3000K	18°	1130lm	551lm	
						24°	1130lm	744lm	
						36°	1130lm	710lm	
						50°	1130lm	713lm	
						15°	1180lm	556lm	ON-OFF TRIAC 1-10V DALI
						18°	1180lm	575lm	
K-CL38-315F-R3D	12W	36V	300mA	90	4000K	24°	1180lm	776lm	
						36°	1180lm	741lm	
						50°	1180lm	744lm	
						18°	1230lm	622lm	ON-OFF TRIAC 1-10V DALI
						24°	1230lm	833lm	
						36°	1230lm	801lm	
K-CL38-315T-R3D	15W	36V	350mA	90	2700K	50°	1230lm	808lm	
						18°	1300lm	658lm	ON-OFF TRIAC 1-10V DALI
						24°	1300lm	881lm	
						36°	1300lm	847lm	
						50°	1300lm	855lm	
						18°	1365lm	690lm	ON-OFF TRIAC 1-10V DALI
K-CL38-315T-R3D	15W	36V	350mA	90	4000K	24°	1365lm	925lm	
						36°	1365lm	889lm	
						50°	1365lm	897lm	
						18°	1365lm	897lm	ON-OFF TRIAC 1-10V DALI
						24°	1365lm	897lm	
						36°	1365lm	897lm	

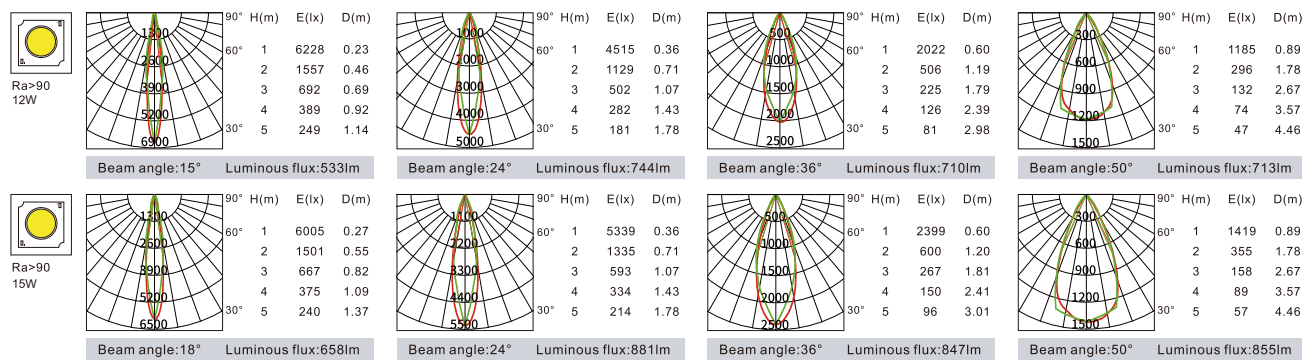


K-CL38-3F-R3D

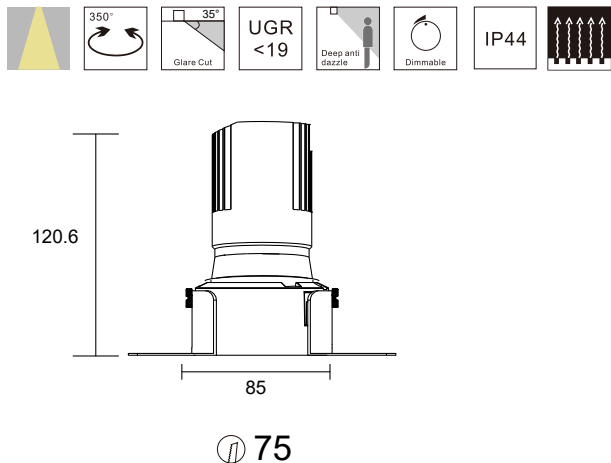






Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 CL38-318F-R3D	18W	36V	450mA	90	2700K	15°	1620lm	1228lm	ON-OFF
						24°	1620lm	1244lm	TRIAC
						36°	1620lm	1246lm	1-10V
						50°	1620lm	1180lm	DALI
						18W	36V	450mA	90
					24°	1744lm	1340lm	TRIAC	
					36°	1744lm	1342lm	1-10V	
					50°	1744lm	1271lm	DALI	
	18W	36V	450mA	90	4000K	15°	1851lm	1403lm	ON-OFF
						24°	1851lm	1422lm	TRIAC
						36°	1851lm	1424lm	1-10V
						50°	1851lm	1348lm	DALI

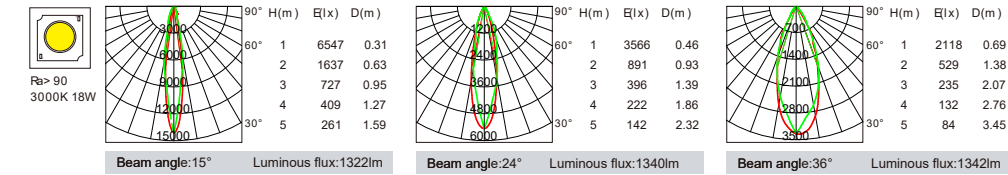


K-CL38-3T-R3D

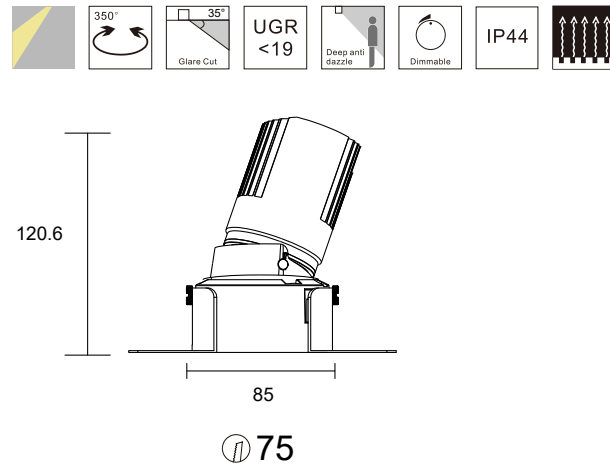







Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 CL38-318T-R3D	18W	36V	450mA	90	2700K	15°	1620lm	1228lm	ON-OFF
						24°	1620lm	1244lm	TRIAC
						36°	1620lm	1246lm	1-10V
						50°	1620lm	1180lm	DALI
						18W	36V	450mA	90
					24°	1744lm	1340lm	TRIAC	
					36°	1744lm	1342lm	1-10V	
					50°	1744lm	1271lm	DALI	
	18W	36V	450mA	90	4000K	15°	1851lm	1403lm	ON-OFF
						24°	1851lm	1422lm	TRIAC
						36°	1851lm	1424lm	1-10V
						50°	1851lm	1348lm	DALI

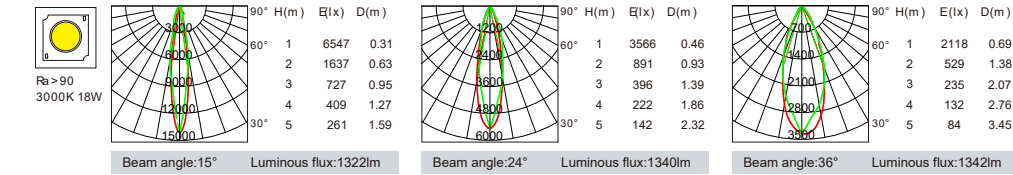


K-CL38-3F-R4D

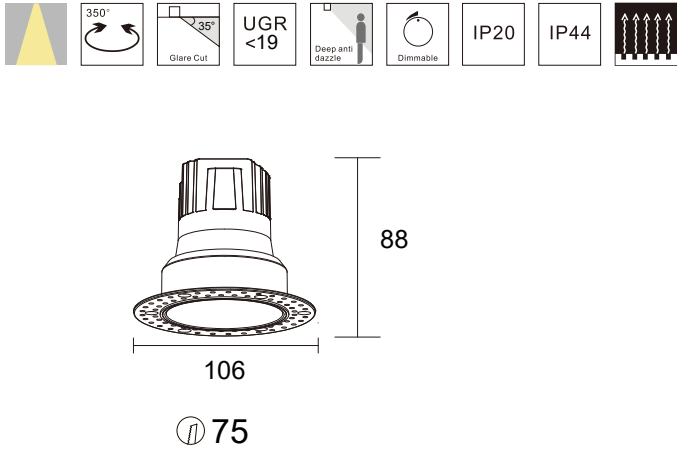


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 K-CL38-305F-R4D	5W	36V	120mA	90	2700K	11°	430lm	214lm	ON-OFF TRIAC 1-10V DALI
						15°	430lm	274lm	
						18°	430lm	255lm	
						24°	430lm	348lm	
						36°	430lm	324lm	
 K-CL38-305T-R4D	5W	36V	120mA	90	2700K	50°	430lm	333lm	ON-OFF TRIAC 1-10V DALI
						11°	470lm	234lm	
						15°	470lm	300lm	
						18°	470lm	279lm	
						24°	470lm	381lm	
	5W	36V	120mA	90	3000K	36°	470lm	355lm	ON-OFF TRIAC 1-10V DALI
						50°	470lm	364lm	
						11°	490lm	243lm	
						15°	490lm	312lm	
						18°	490lm	290lm	
	5W	36V	120mA	90	4000K	24°	490lm	397lm	ON-OFF TRIAC 1-10V DALI
						36°	490lm	370lm	
						50°	490lm	379lm	

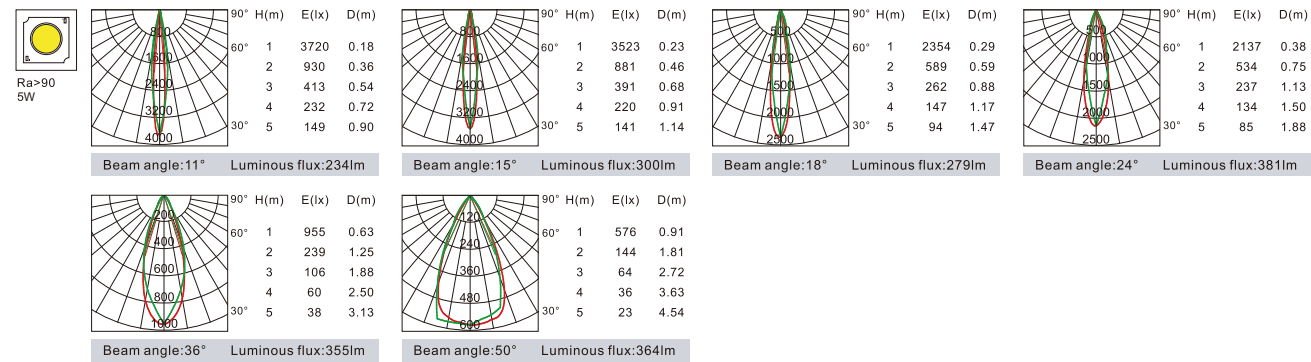


K-CL38-3T-R4D

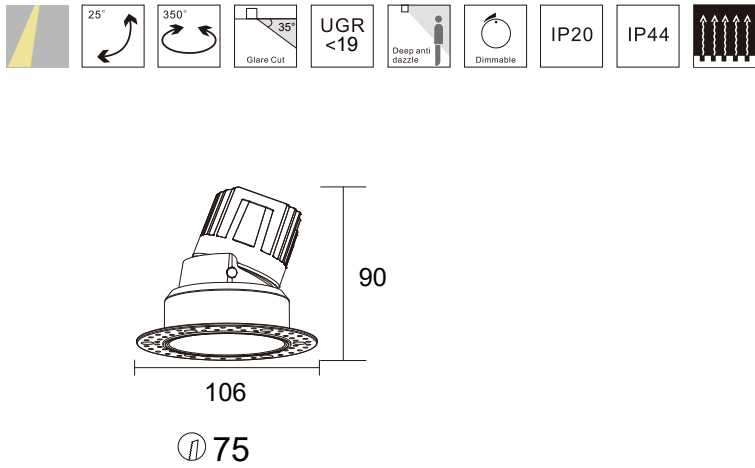


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 K-CL38-308F-R4D	8W	36V	200mA	90	2700K	11°	740lm	286lm	ON-OFF TRIAC 1-10V DALI
						15°	740lm	343lm	
						18°	740lm	315lm	
						24°	740lm	433lm	
						36°	740lm	413lm	
 K-CL38-308T-R4D	8W	36V	200mA	90	2700K	50°	740lm	416lm	ON-OFF TRIAC 1-10V DALI
						11°	805lm	312lm	
						15°	805lm	374lm	
						18°	805lm	343lm	
						24°	805lm	472lm	
	8W	36V	200mA	90	3000K	36°	805lm	450lm	ON-OFF TRIAC 1-10V DALI
						50°	805lm	453lm	
						11°	850lm	329lm	
						15°	850lm	394lm	
						18°	850lm	362lm	
	8W	36V	200mA	90	4000K	24°	850lm	498lm	ON-OFF TRIAC 1-10V DALI
						36°	850lm	475lm	
						50°	850lm	478lm	

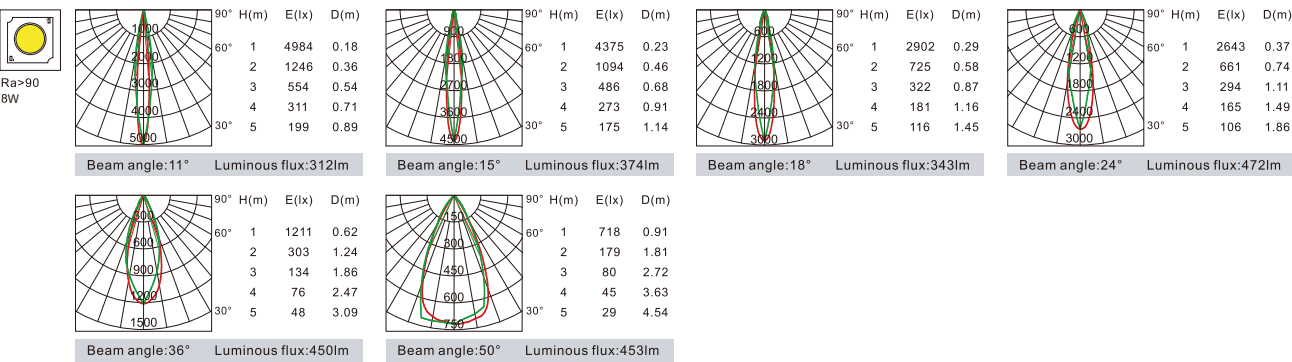


K-CL38-3F-R4D

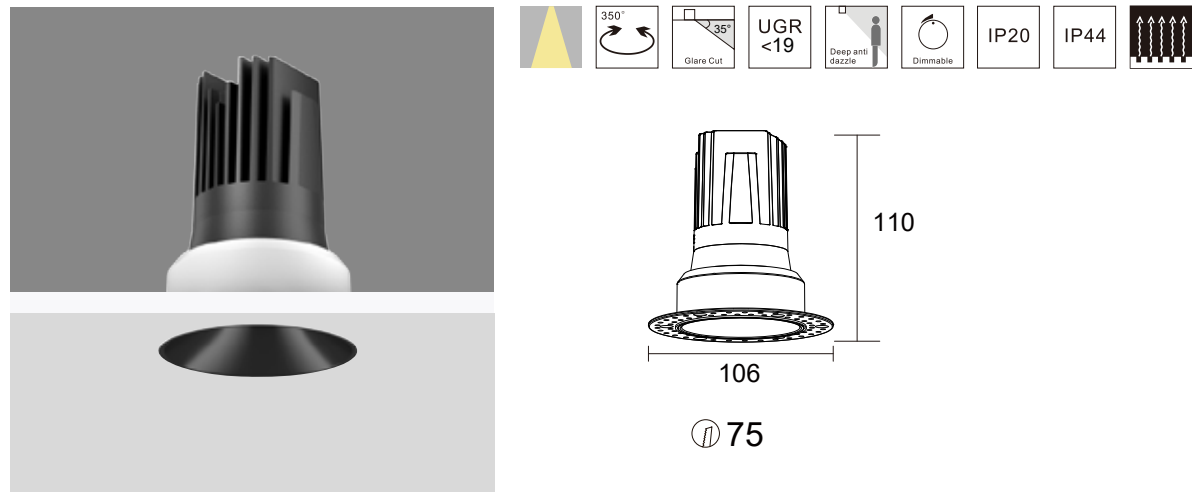



Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
K-CL38-310F-R4D	10W	36V	250mA	90	2700K	11°	920lm	323lm	ON-OFF TRIAC 1-10V DALI
						15°	920lm	444lm	
						18°	920lm	413lm	
						24°	920lm	540lm	
						36°	920lm	524lm	
K-CL38-310T-R4D	10W	36V	250mA	90	3000K	50°	920lm	540lm	ON-OFF TRIAC 1-10V DALI
						11°	950lm	336lm	
						15°	950lm	462lm	
						18°	950lm	430lm	
						24°	950lm	561lm	
K-CL38-310T-R4D	10W	36V	250mA	90	4000K	36°	950lm	545lm	ON-OFF TRIAC 1-10V DALI
						50°	950lm	562lm	
						11°	1005lm	351lm	
						15°	1005lm	483lm	
						18°	1005lm	450lm	
K-CL38-310T-R4D	10W	36V	250mA	90	4000K	24°	1005lm	587lm	ON-OFF TRIAC 1-10V DALI
						36°	1005lm	570lm	
						50°	1005lm	588lm	
						11°	1005lm	588lm	
						15°	1005lm	588lm	

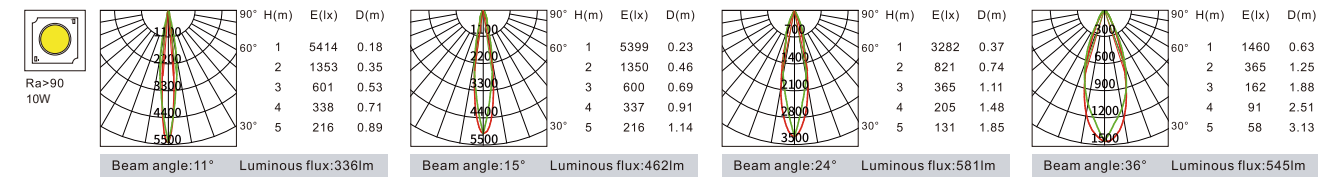


K-CL38-3T-R4D

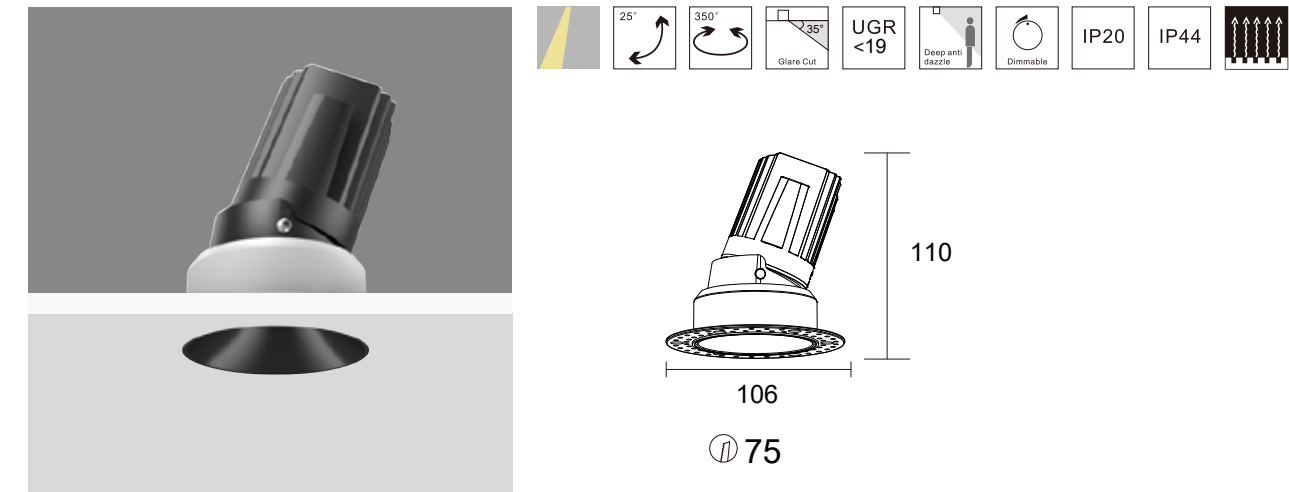


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
K-CL38-312F-R4D	12W	36V	300mA	90	2700K	15°	1080lm	509lm	ON-OFF TRIAC 1-10V DALI
						18°	1080lm	526lm	
						24°	1080lm	711lm	
						36°	1080lm	678lm	
						50°	1080lm	681lm	
K-CL38-312T-R4D	12W	36V	300mA	90	3000K	15°	1130lm	533lm	ON-OFF TRIAC 1-10V DALI
						18°	1130lm	551lm	
						24°	1130lm	744lm	
						36°	1130lm	710lm	
						50°	1130lm	713lm	
K-CL38-315F-R4D	12W	36V	300mA	90	4000K	15°	1180lm	556lm	ON-OFF TRIAC 1-10V DALI
						18°	1180lm	575lm	
						24°	1180lm	776lm	
						36°	1180lm	741lm	
						50°	1180lm	744lm	
K-CL38-315T-R4D	15W	36V	350mA	90	2700K	18°	1230lm	622lm	ON-OFF TRIAC 1-10V DALI
						24°	1230lm	833lm	
						36°	1230lm	801lm	
						50°	1230lm	808lm	
						18°	1300lm	658lm	
K-CL38-315T-R4D	15W	36V	350mA	90	3000K	24°	1300lm	881lm	ON-OFF TRIAC 1-10V DALI
						36°	1300lm	847lm	
						50°	1300lm	855lm	
						18°	1365lm	690lm	
						24°	1365lm	925lm	
K-CL38-315T-R4D	15W	36V	350mA	90	4000K	36°	1365lm	889lm	ON-OFF TRIAC 1-10V DALI
						50°	1365lm	897lm	
						18°	1365lm	897lm	
						24°	1365lm	897lm	
						36°	1365lm	897lm	

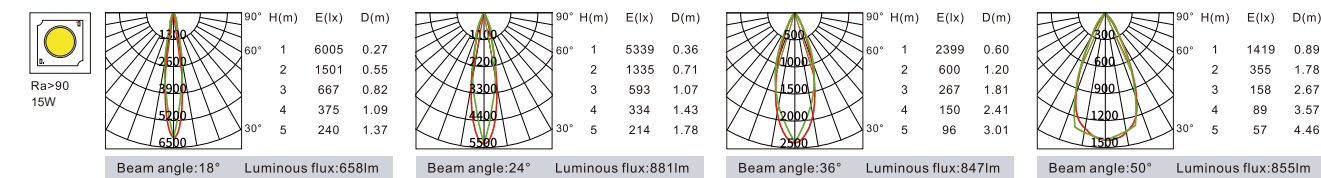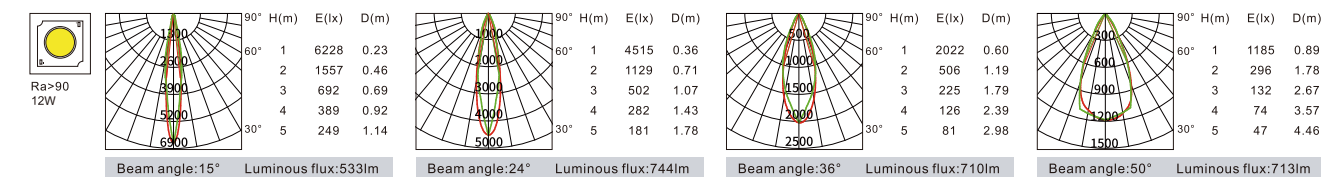


K-CL38-3F-R3D

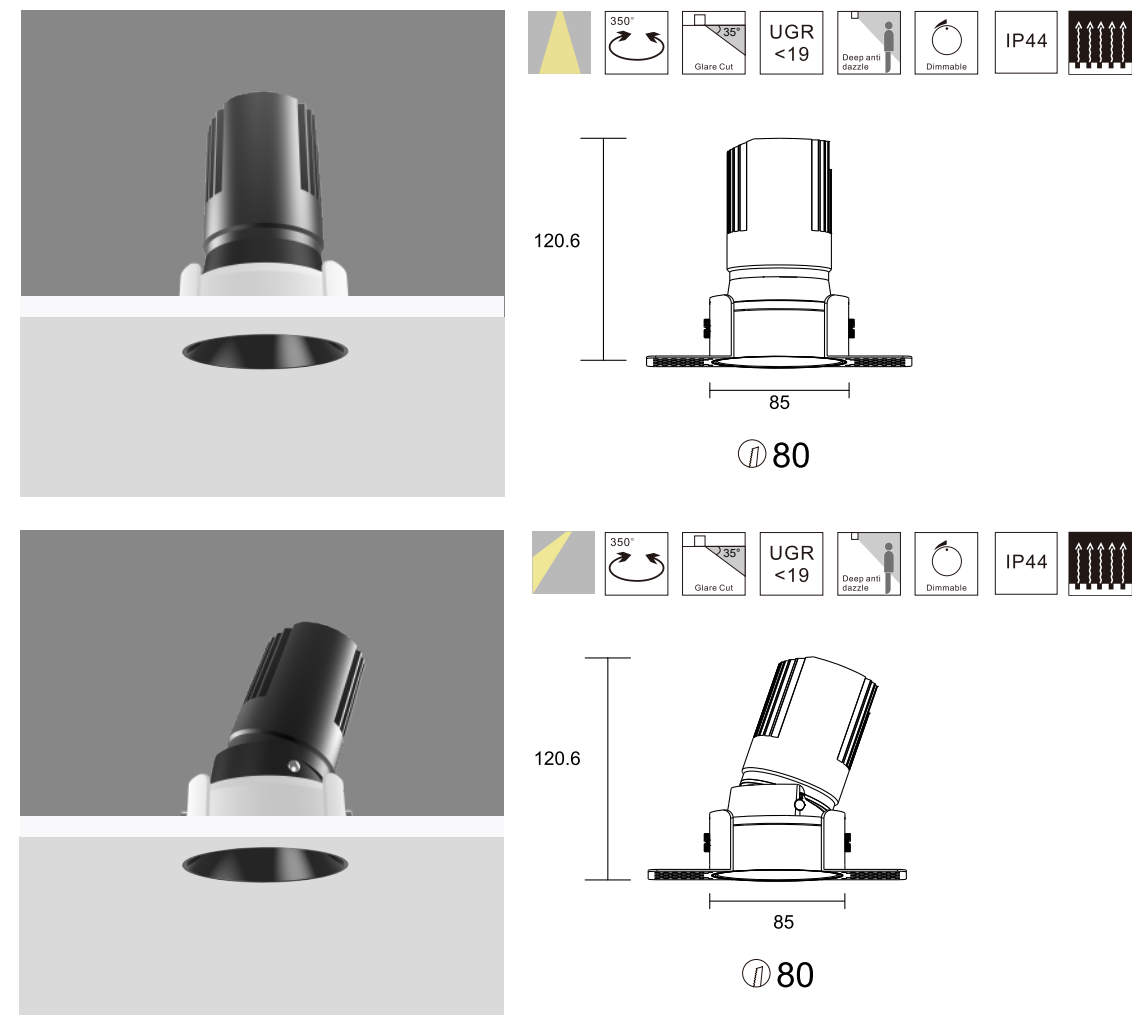


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
K-CL38-318F-R3D	18W	36V	450mA	90	2700K	15°	1620lm	1174lm	ON-OFF
						24°	1620lm	1221lm	TRIAC
						36°	1620lm	1257lm	1-10V
						50°	1620lm	1234lm	DALI
K-CL38-318T-R3D	18W	36V	450mA	90	3000K	15°	1744lm	1264lm	ON-OFF
						24°	1744lm	1315lm	TRIAC
						36°	1744lm	1354lm	1-10V
						50°	1744lm	1329lm	DALI
	18W	36V	450mA	90	4000K	15°	1851lm	1341lm	ON-OFF
						24°	1851lm	1395lm	TRIAC
						36°	1851lm	1437lm	1-10V
						50°	1851lm	1410lm	DALI

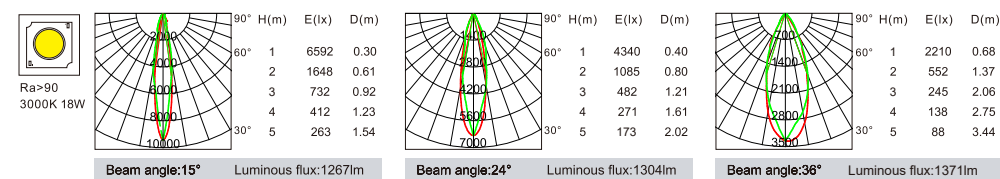

K-CL38-3T-R4D

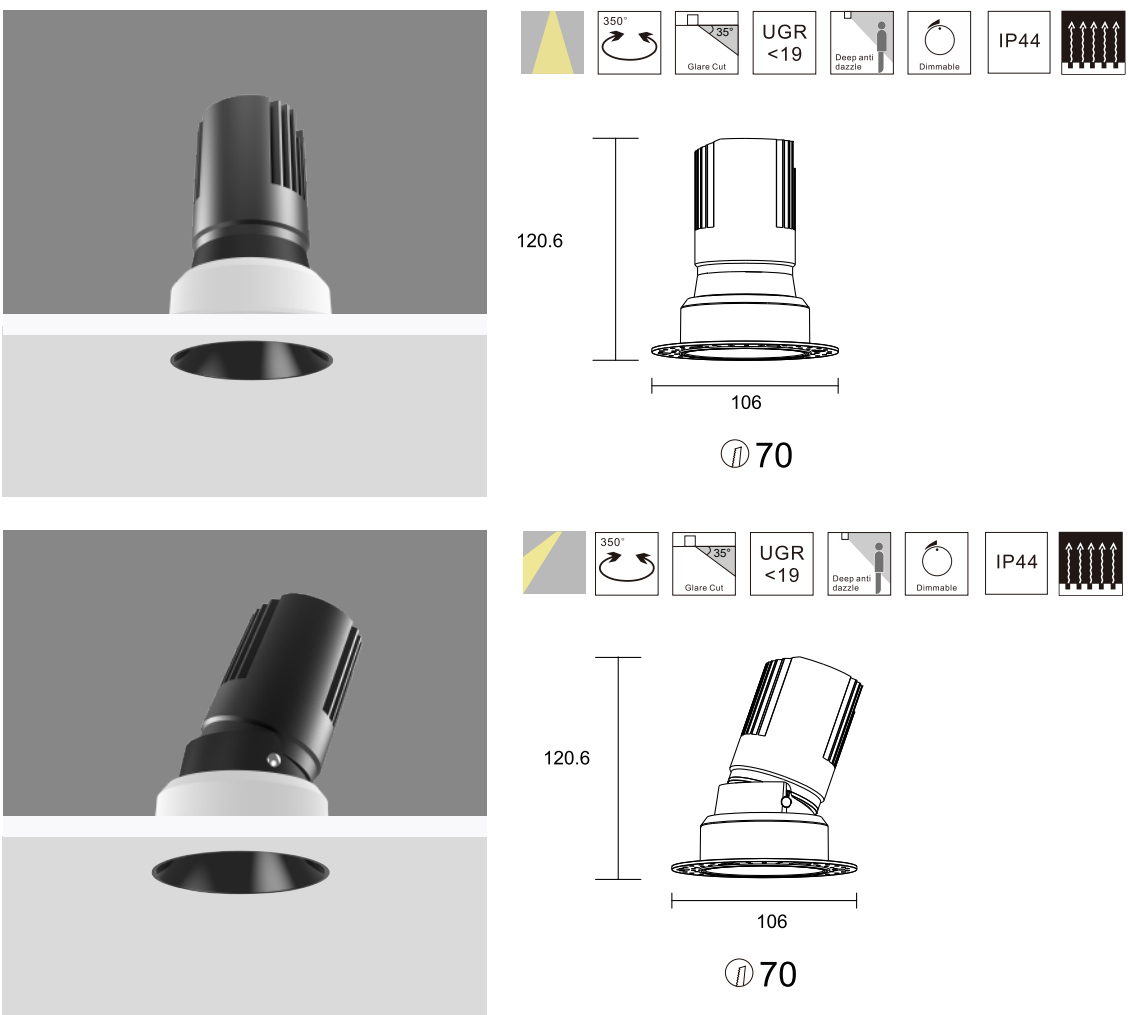

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
K-CL38-318F-R4D	18W	36V	450mA	90	2700K	15°	1620lm	1176lm	ON-OFF
						24°	1620lm	1211lm	TRIAC
						36°	1620lm	1273lm	1-10V
						50°	1620lm	1195lm	DALI
K-CL38-318T-R4D	18W	36V	450mA	90	3000K	15°	1744lm	1267lm	ON-OFF
						24°	1744lm	1304lm	TRIAC
						36°	1744lm	1371lm	1-10V
						50°	1744lm	1287lm	DALI
	18W	36V	450mA	90	4000K	15°	1851lm	1344lm	ON-OFF
						24°	1851lm	1384lm	TRIAC
						36°	1851lm	1445lm	1-10V
						50°	1851lm	1365lm	DALI

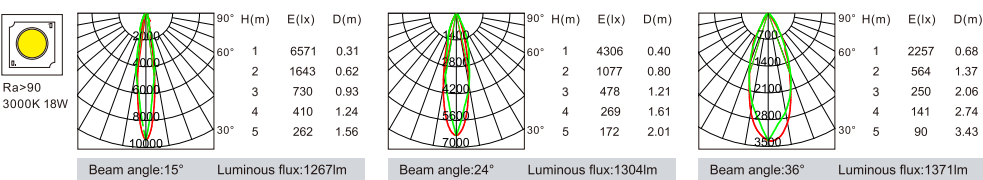



K-CL38/K-GL38





GL 38 series LED ceiling spotlight, as a high quality fixture, is specially designed for luxury hotels and villas. Lamp body can be universally adjustable, vertical irradiation and wall washer. It can meet different lighting performance of hotel room, corridor, meeting room, hall and resting area ect.









K-CL38-3FS2D
Power:2*5W
Cutout:75*70mm
Height:85*85*H117



K-GL38-3TS2D
Power:2*10W/2*12W/2*15W
Cutout:165*80mm
Height:180*95*H115

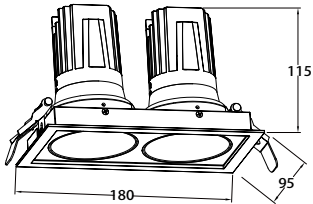

GL38 Series

Model	K-CL38-3-R2D	K-CL38-3-S2D	K-GL38-3-FS2D	K-GL38-3-FS2D	K-GL38-3T-S2D	K-GL38-3T-S2D
Product Photo						
Dimension(mm)						
Cutout(mm)	75*75	75*75	165*80	165*80	165*80	165*80
Wattage	8W	15W	2*5W/2*8W	2*10W/2*12W/2*15W	2*5W/2*8W	2*10W/2*12W/2*15W
CCT	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K 5000K	2700K 3000K 4000K 5000K	2700K 3000K 4000K 5000K	2700K 3000K 4000K 5000K
CRI	>90	>90	>90	>90	>90	>90
Beam Angle	18°/24°/36°/50°	18°/24°/36°/50°	18° /24° /36° /50°	18° /24° /36° /50°	18° /24° /36° /50°	18° /24° /36° /50°
Lumen	350-460LM	608-755LM	695-1370LM	1171-1476LM	695-1370LM	1171-1476LM
IP	IP20/IP44	IP20/IP44	IP20/IP44	IP20/IP44	IP20/IP44	IP20/IP44
Dimming	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI
Accessory	Honeycomb Filter Stripped Glass Cross-grille Red Filter Green Filter Blue Filter	Honeycomb Filter Stripped Glass Cross-grille Red Filter Green Filter Blue Filter	Honeycomb Filter	Honeycomb Filter	Honeycomb Filter	Honeycomb Filter
Reflector Colour	UV processed black cup Highly specular aluminium White	UV processed black cup Highly specular aluminium White	UV processed black cup Highly specular aluminium White	UV processed black cup Highly specular aluminium White	UV processed black cup Highly specular aluminium White	UV processed black cup Highly specular aluminium White
Colour	White+Iron gray	White+Iron gray	White+Iron gray	White+Iron gray	White+Iron gray	White+Iron gray

Reflecting Accessories



Highly specular aluminium



UV processed black cup





White




Honeycomb Filter

Optical Accessories



K-CL38-3F-S2D

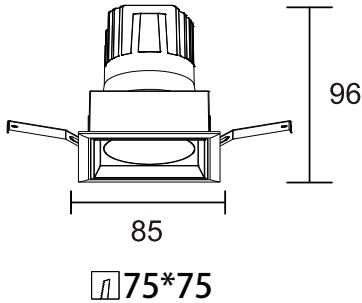


	Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	K-CL38-308F-S2D	8W	34V	230mA	90	2700K	15°	935lm	531lm	ON-OFF
							24°	935lm	691lm	TRIAC
							36°	935lm	667lm	1-10V
							50°	935lm	720lm	DALI
		8W	34V	230mA	90	3000K	15°	973lm	553lm	ON-OFF
							24°	973lm	720lm	TRIAC
							36°	973lm	695lm	1-10V
							50°	973lm	750lm	DALI
		8W	34V	230mA	90	4000K	15°	989lm	562lm	ON-OFF
							24°	989lm	731lm	TRIAC
							36°	989lm	706lm	1-10V
							50°	989lm	762lm	DALI
	K-CL38-312F-S2D	12W	34V	300mA	90	2700K	15°	1068lm	614lm	ON-OFF
							24°	1068lm	860lm	TRIAC
							36°	1068lm	891lm	1-10V
							50°	1068lm	883lm	DALI
		12W	34V	300mA	90	3000K	15°	1150lm	662lm	ON-OFF
							24°	1150lm	924lm	TRIAC
							36°	1150lm	960lm	1-10V
							50°	1150lm	951lm	DALI
		12W	34V	300mA	90	4000K	15°	1220lm	702lm	ON-OFF
							24°	1220lm	980lm	TRIAC
							36°	1220lm	1018lm	1-10V
							50°	1220lm	1008lm	DALI

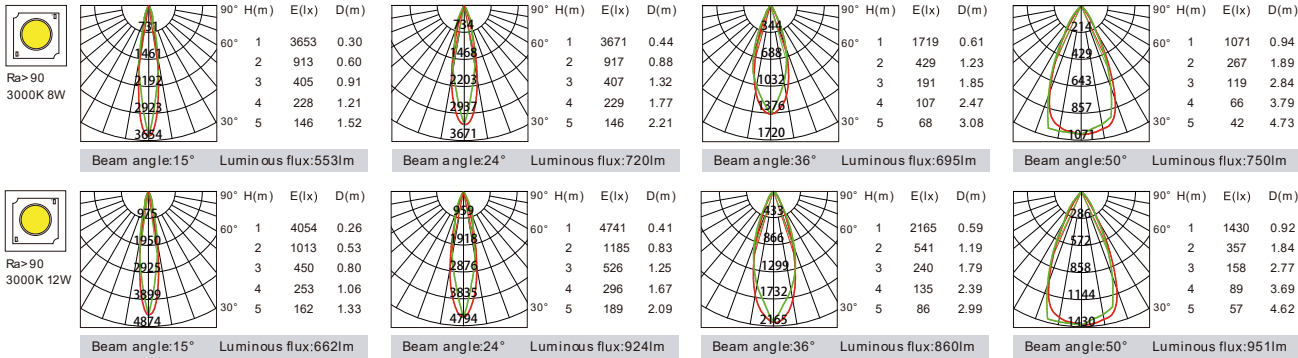



K-CL38-3T-S2D

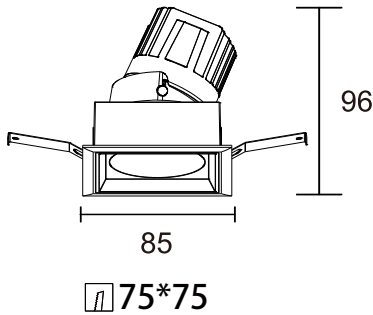


	Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type					
	K-CL38-308T-S2D	8W	34V	230mA	90	2700K	15°	935lm	531lm	ON-OFF					
							24°	935lm	691lm	TRIAC					
							36°	935lm	667lm	1-10V					
							50°	935lm	720lm	DALI					
		8W	34V	230mA	90	3000K	15°	973lm	553lm	ON-OFF					
							24°	973lm	720lm	TRIAC					
	K-CL38-312T-S2D	12W	34V	300mA	90	2700K	36°	973lm	695lm	1-10V					
							50°	973lm	750lm	DALI					
							8W	34V	230mA	90	4000K	15°	989lm	562lm	ON-OFF
												24°	989lm	731lm	TRIAC
		12W	34V	200mA	90	3000K	36°	989lm	706lm	1-10V					
							50°	989lm	762lm	DALI					
	K-CL38-312T-S2D	12W	34V	200mA	90	2700K	15°	1068lm	614lm	ON-OFF					
							24°	1068lm	860lm	TRIAC					
							36°	1068lm	891lm	1-10V					
							50°	1068lm	883lm	DALI					
	12W	34V	200mA	90	3000K	15°	1150lm	662lm	ON-OFF						
						24°	1150lm	924lm	TRIAC						
	12W	34V	200mA	90	4000K	36°	1150lm	960lm	1-10V						
						50°	1150lm	951lm	DALI						
		12W	34V	200mA	90	4000K	15°	1220lm	702lm	ON-OFF					
							24°	1220lm	980lm	TRIAC					
		12W	34V	200mA	90	4000K	36°	1220lm	1018lm	1-10V					
							50°	1220lm	1008lm	DALI					

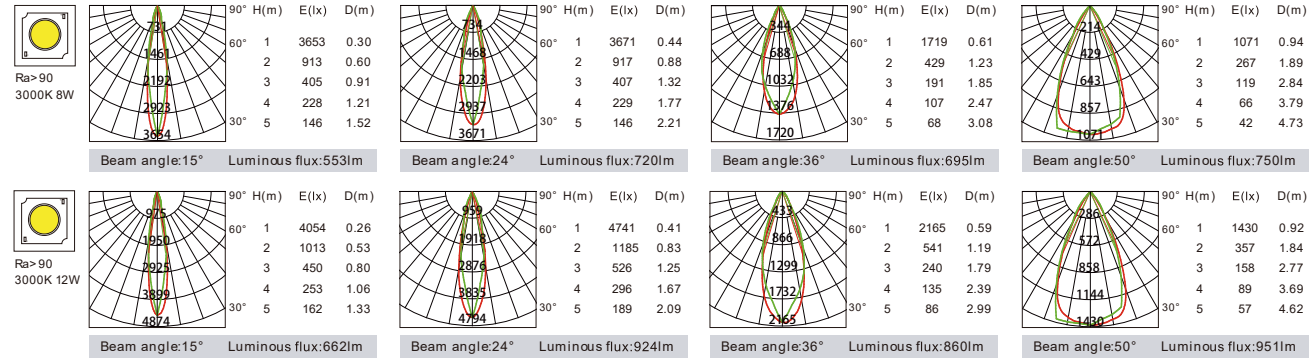



K-CL38-3F-S2D

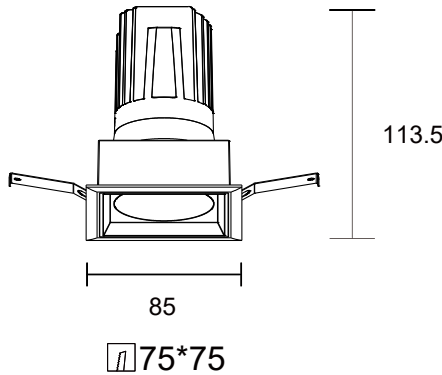


	Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	K-CL38-315F-S2D	15W	34V	230mA	90	2700K	15°	935lm	531lm	ON-OFF
							24°	935lm	691lm	TRIAC
							36°	935lm	667lm	1-10V
							50°	935lm	720lm	DALI
		15W	34V	230mA	90	3000K	15°	973lm	553lm	ON-OFF
							24°	973lm	720lm	TRIAC
							36°	973lm	695lm	1-10V
							50°	973lm	750lm	DALI
		15W	34V	230mA	90	4000K	15°	989lm	562lm	ON-OFF
							24°	989lm	731lm	TRIAC
							36°	989lm	706lm	1-10V
							50°	989lm	762lm	DALI
	K-CL38-318F-S2D	18W	34V	300mA	90	2700K	15°	1068lm	614lm	ON-OFF
							24°	1068lm	860lm	TRIAC
							36°	1068lm	891lm	1-10V
							50°	1068lm	883lm	DALI
		18W	34V	300mA	90	3000K	15°	1150lm	662lm	ON-OFF
							24°	1150lm	924lm	TRIAC
							36°	1150lm	960lm	1-10V
							50°	1150lm	951lm	DALI
		18W	34V	300mA	90	4000K	15°	1220lm	702lm	ON-OFF
							24°	1220lm	980lm	TRIAC
							36°	1220lm	1018lm	1-10V
							50°	1220lm	1008lm	DALI

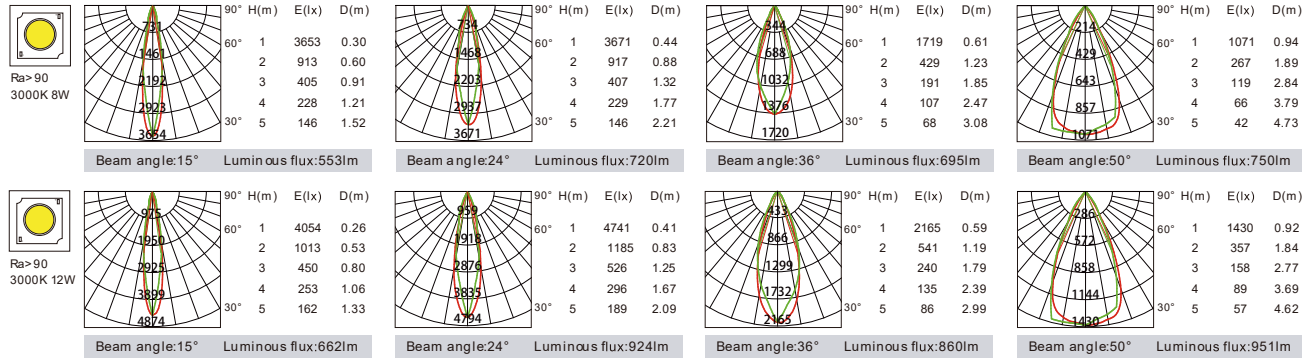


K-CL38-3T-S2D

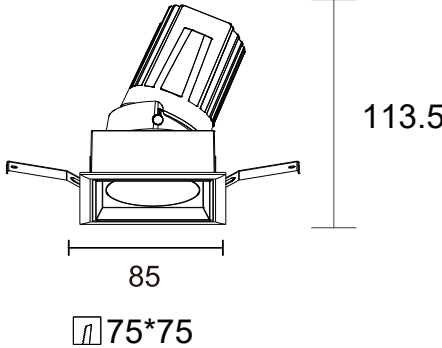


	Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	K-CL38-315T-S2D	15W	34V	230mA	90	2700K	15°	935lm	531lm	ON-OFF
							24°	935lm	691lm	TRIAC
							36°	935lm	667lm	1-10V
							50°	935lm	720lm	DALI
		15W	34V	230mA	90	3000K	15°	973lm	553lm	ON-OFF
							24°	973lm	720lm	TRIAC
							36°	973lm	695lm	1-10V
							50°	973lm	750lm	DALI
	15W	34V	230mA	90	4000K	15°	989lm	562lm	ON-OFF	
						24°	989lm	731lm	TRIAC	
						36°	989lm	706lm	1-10V	
						50°	989lm	762lm	DALI	
	K-CL38-318T-S2D	18W	34V	300mA	90	2700K	15°	1068lm	614lm	ON-OFF
							24°	1068lm	860lm	TRIAC
							36°	1068lm	891lm	1-10V
							50°	1068lm	883lm	DALI
		18W	34V	200mA	90	3000K	15°	1150lm	662lm	ON-OFF
							24°	1150lm	924lm	TRIAC
							36°	1150lm	960lm	1-10V
							50°	1150lm	951lm	DALI
	18W	34V	200mA	90	4000K	15°	1220lm	702lm	ON-OFF	
						24°	1220lm	980lm	TRIAC	
						36°	1220lm	1018lm	1-10V	
						50°	1220lm	1008lm	DALI	

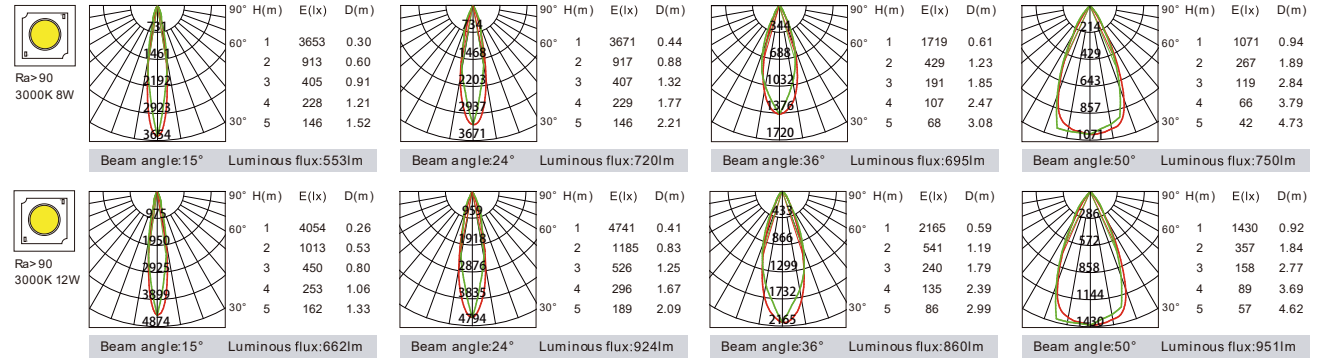


K-CL38-3F-R3D

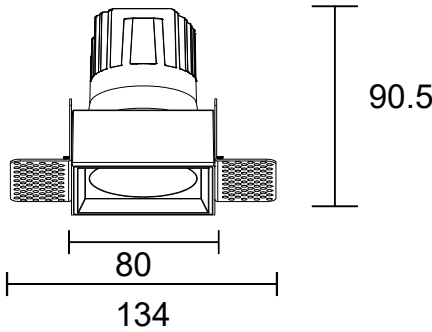


72.5*72.5




	Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	K-CL38-308F-S3D	8W	34V	230mA	90	2700K	15°	935lm	531lm	ON-OFF
							24°	935lm	691lm	TRIAC
							36°	935lm	667lm	1-10V
							50°	935lm	720lm	DALI
		8W	34V	230mA	90	3000K	15°	973lm	553lm	ON-OFF
							24°	973lm	720lm	TRIAC
							36°	973lm	695lm	1-10V
							50°	973lm	750lm	DALI
		8W	34V	230mA	90	4000K	15°	989lm	562lm	ON-OFF
							24°	989lm	731lm	TRIAC
							36°	989lm	706lm	1-10V
							50°	989lm	762lm	DALI
	K-CL38-312F-S3D	12W	34V	300mA	90	2700K	15°	1068lm	614lm	ON-OFF
							24°	1068lm	860lm	TRIAC
							36°	1068lm	891lm	1-10V
							50°	1068lm	883lm	DALI
		12W	34V	300mA	90	3000K	15°	1150lm	662lm	ON-OFF
							24°	1150lm	924lm	TRIAC
							36°	1150lm	960lm	1-10V
							50°	1150lm	951lm	DALI
		12W	34V	300mA	90	4000K	15°	1220lm	702lm	ON-OFF
							24°	1220lm	980lm	TRIAC
							36°	1220lm	1018lm	1-10V
							50°	1220lm	1008lm	DALI

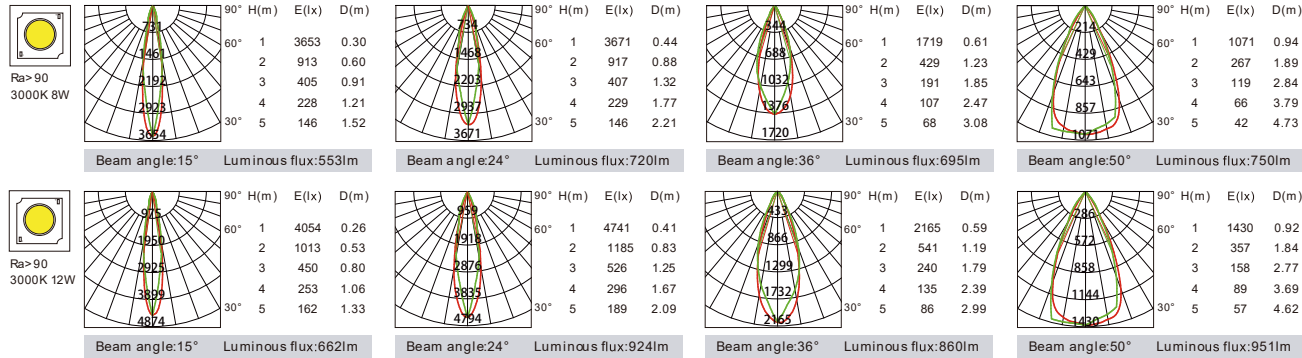


K-CL38-3T-R3D

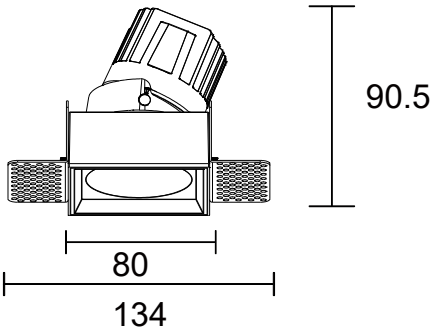



72.5*72.5




	Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	K-CL38-308T-S3D	8W	34V	230mA	90	2700K	15°	935lm	531lm	ON-OFF
							24°	935lm	691lm	TRIAC
							36°	935lm	667lm	1-10V
							50°	935lm	720lm	DALI
		8W	34V	230mA	90	3000K	15°	973lm	553lm	ON-OFF
							24°	973lm	720lm	TRIAC
							36°	973lm	695lm	1-10V
							50°	973lm	750lm	DALI
		8W	34V	230mA	90	4000K	15°	989lm	562lm	ON-OFF
							24°	989lm	731lm	TRIAC
							36°	989lm	706lm	1-10V
							50°	989lm	762lm	DALI
	K-CL38-312T-S3D	12W	34V	300mA	90	2700K	15°	1068lm	614lm	ON-OFF
							24°	1068lm	860lm	TRIAC
							36°	1068lm	891lm	1-10V
							50°	1068lm	883lm	DALI
		12W	34V	200mA	90	3000K	15°	1150lm	662lm	ON-OFF
							24°	1150lm	924lm	TRIAC
							36°	1150lm	960lm	1-10V
							50°	1150lm	951lm	DALI
		12W	34V	200mA	90	4000K	15°	1220lm	702lm	ON-OFF
							24°	1220lm	980lm	TRIAC
							36°	1220lm	1018lm	1-10V
							50°	1220lm	1008lm	DALI

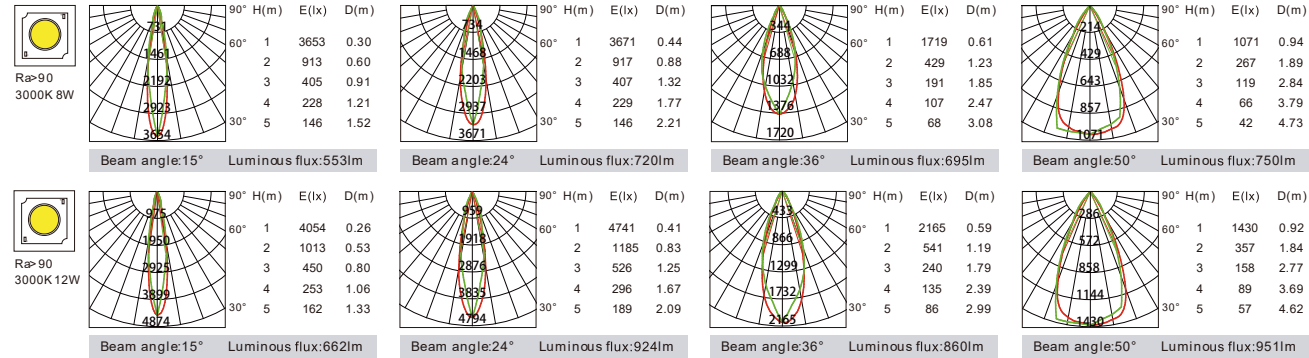



K-CL38-3F-R3D

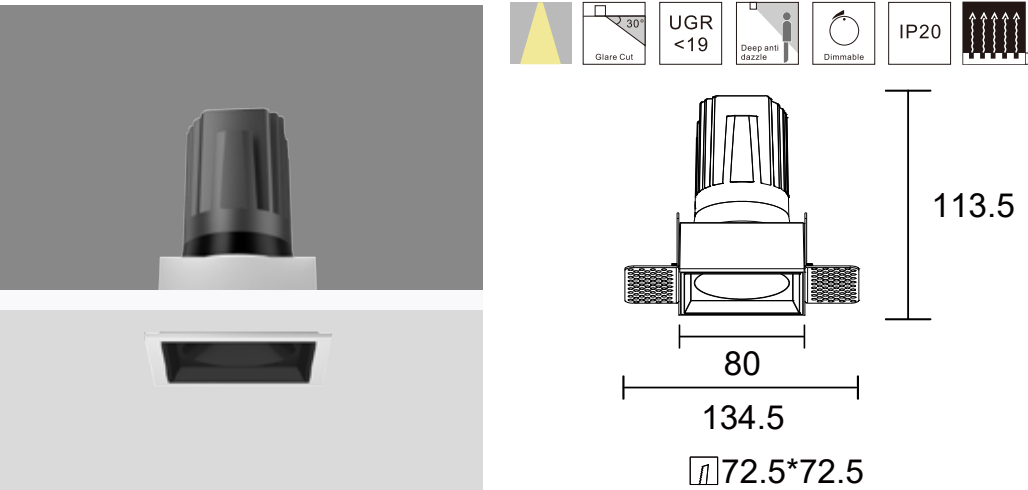


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 K-CL38-315F-S3D	15W	34V	230mA	90	2700K	15°	935lm	531lm	ON-OFF
						24°	935lm	691lm	TRIAC
						36°	935lm	667lm	1-10V
						50°	935lm	720lm	DALI
	15W	34V	230mA	90	3000K	15°	973lm	553lm	ON-OFF
						24°	973lm	720lm	TRIAC
						36°	973lm	695lm	1-10V
						50°	973lm	750lm	DALI
	15W	34V	230mA	90	4000K	15°	989lm	562lm	ON-OFF
						24°	989lm	731lm	TRIAC
						36°	989lm	706lm	1-10V
						50°	989lm	762lm	DALI
 K-CL38-318F-S3D	18W	34V	300mA	90	2700K	15°	1068lm	614lm	ON-OFF
						24°	1068lm	860lm	TRIAC
						36°	1068lm	891lm	1-10V
						50°	1068lm	883lm	DALI
	18W	34V	300mA	90	3000K	15°	1150lm	662lm	ON-OFF
						24°	1150lm	924lm	TRIAC
						36°	1150lm	960lm	1-10V
						50°	1150lm	951lm	DALI
	18W	34V	300mA	90	4000K	15°	1220lm	702lm	ON-OFF
						24°	1220lm	980lm	TRIAC
						36°	1220lm	1018lm	1-10V
						50°	1220lm	1008lm	DALI

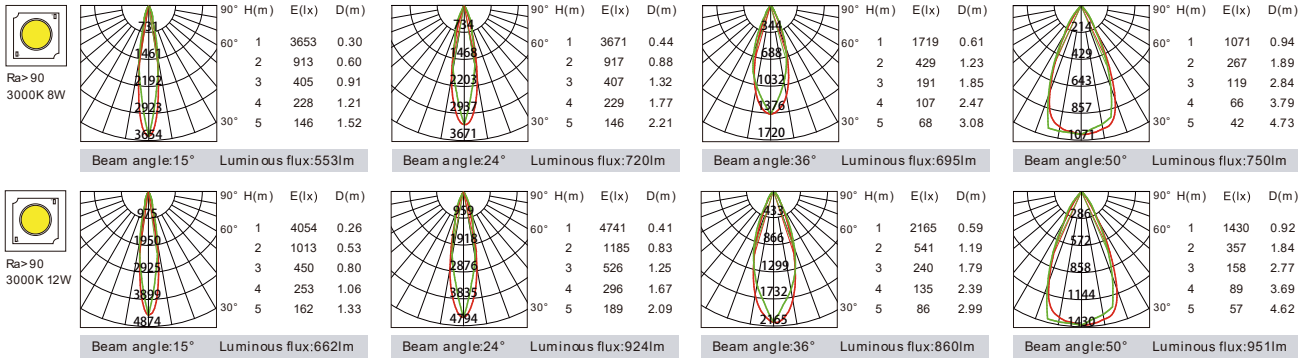


K-CL38-3T-R3D

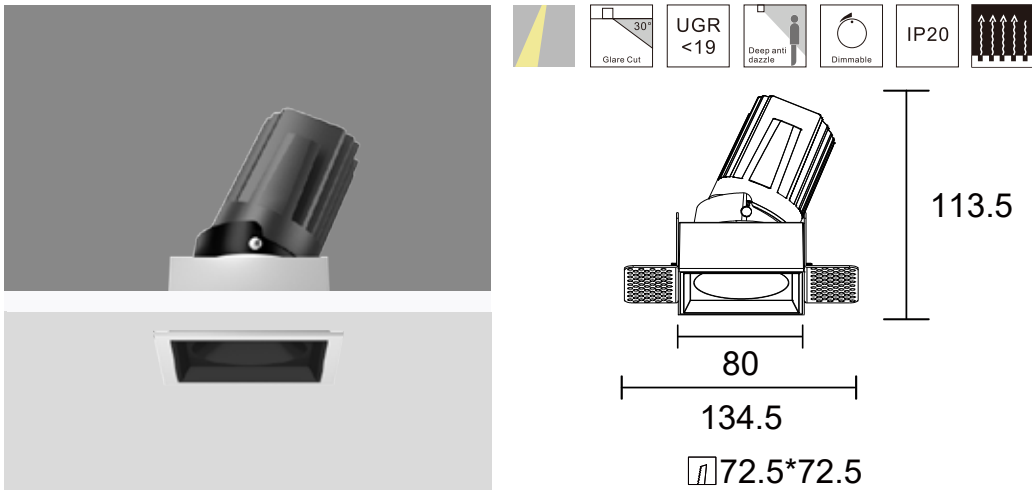


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 K-CL38-315T-S3D	15W	34V	230mA	90	2700K	15°	935lm	531lm	ON-OFF
						24°	935lm	691lm	TRIAC
						36°	935lm	667lm	1-10V
						50°	935lm	720lm	DALI
	15W	34V	230mA	90	3000K	15°	973lm	553lm	ON-OFF
						24°	973lm	720lm	TRIAC
						36°	973lm	695lm	1-10V
						50°	973lm	750lm	DALI
	15W	34V	230mA	90	4000K	15°	989lm	562lm	ON-OFF
						24°	989lm	731lm	TRIAC
						36°	989lm	706lm	1-10V
						50°	989lm	762lm	DALI
 K-CL38-318T-S3D	18W	34V	300mA	90	2700K	15°	1068lm	614lm	ON-OFF
						24°	1068lm	860lm	TRIAC
						36°	1068lm	891lm	1-10V
						50°	1068lm	883lm	DALI
	18W	34V	200mA	90	3000K	15°	1150lm	662lm	ON-OFF
						24°	1150lm	924lm	TRIAC
						36°	1150lm	960lm	1-10V
						50°	1150lm	951lm	DALI
	18W	34V	200mA	90	4000K	15°	1220lm	702lm	ON-OFF
						24°	1220lm	980lm	TRIAC
						36°	1220lm	1018lm	1-10V
						50°	1220lm	1008lm	DALI

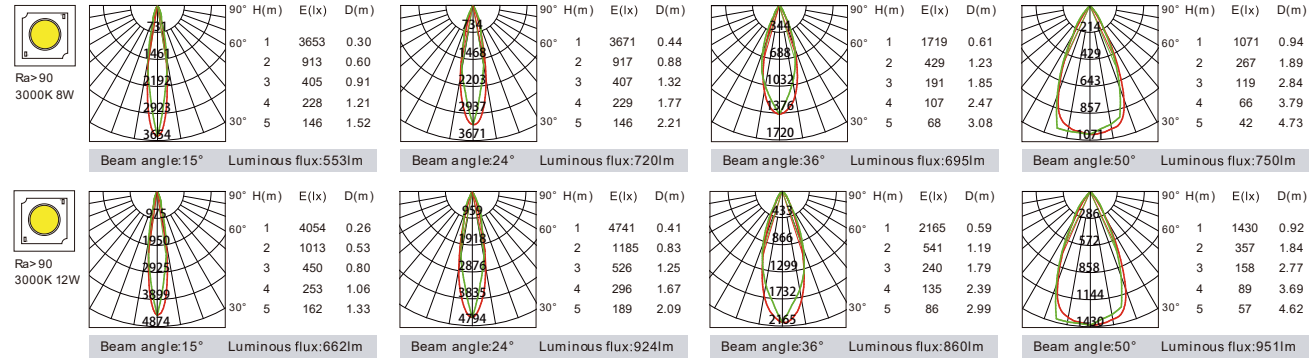


K-GL38-3F-S2D

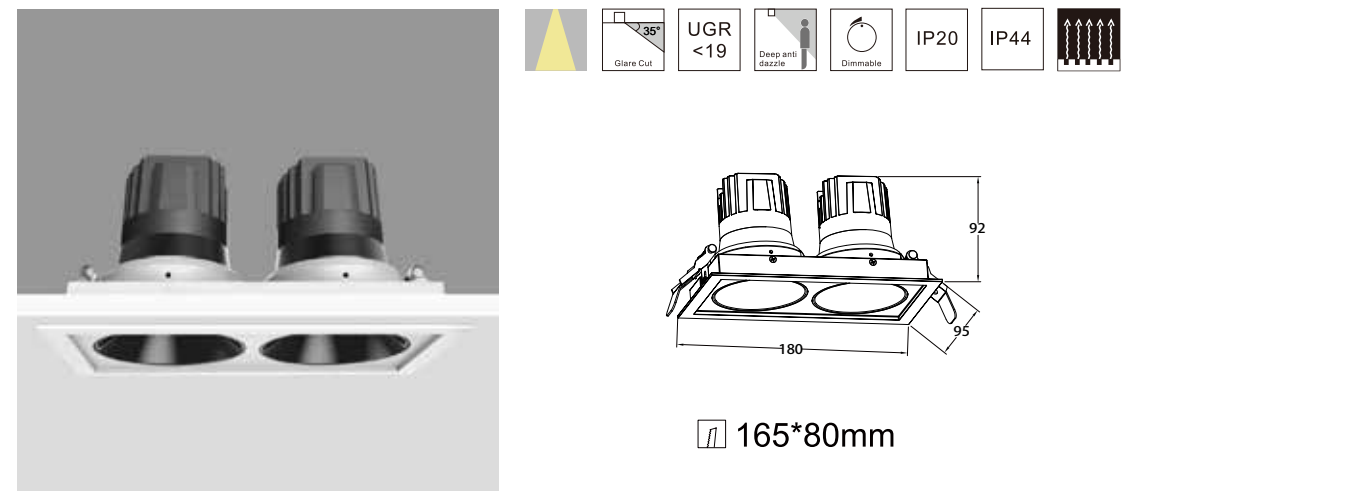


	Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	K-GL38-310F-S2D	2*5W	36V	120mA	90	2700K	18°	430*2lm	695lm	ON-OFF
							24°	430*2lm	734lm	TRIAC
							36°	430*2lm	751lm	1-10V
							50°	430*2lm	699lm	DALI
	K-GL38-310TS2D	2*5W	36V	120mA	90	3000K	18°	470*2lm	760lm	ON-OFF
							24°	470*2lm	803lm	TRIAC
							36°	470*2lm	821lm	1-10V
							50°	470*2lm	765lm	DALI
		2*5W	36V	120mA	90	4000K	18°	490*2lm	792lm	ON-OFF
							24°	490*2lm	837lm	TRIAC
							36°	490*2lm	855lm	1-10V
							50°	490*2lm	797lm	DALI

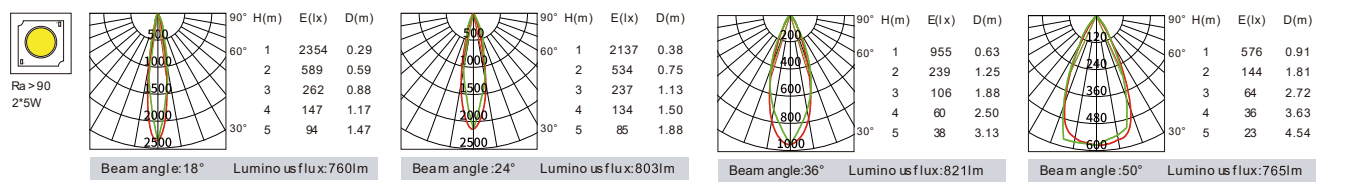


K-GL38-3T-S2D

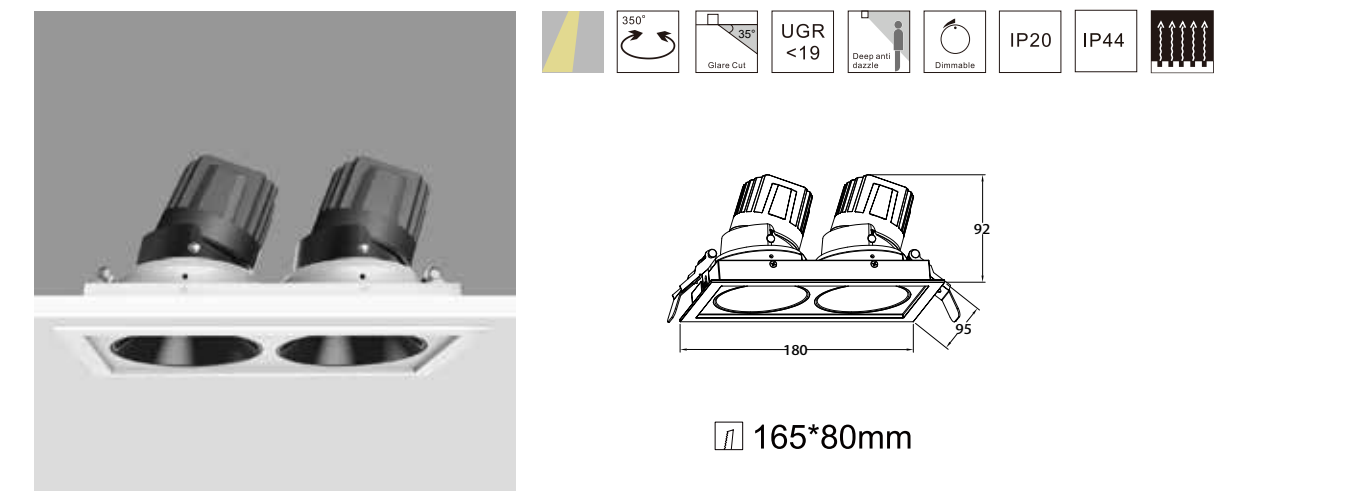

	Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	K-GL38-316F-S2D	2*8W	36V	200mA	90	2700K	18°	740*2lm	1120lm	ON-OFF
							24°	740*2lm	1149lm	TRIAC
							36°	740*2lm	1203lm	1-10V
							50°	740*2lm	1107lm	DALI
	K-GL38-316TS2D	2*8W	36V	200mA	90	3000K	18°	805*2lm	1225lm	ON-OFF
							24°	805*2lm	1286lm	TRIAC
							36°	805*2lm	1315lm	1-10V
							50°	805*2lm	1210lm	DALI
		2*8W	36V	200mA	90	4000K	18°	850*2lm	1277lm	ON-OFF
							24°	850*2lm	1340lm	TRIAC
							36°	850*2lm	1370lm	1-10V
							50°	850*2lm	1261lm	DALI

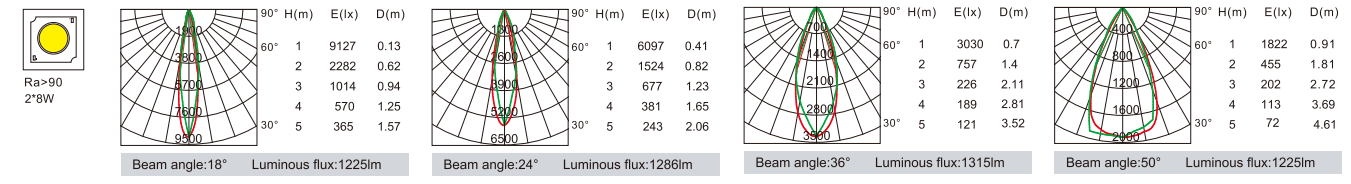






K-GL38-3F-S2D








Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 K-GL38-320F-S2D	2*10W	36V	250mA	90	2700K	18°	920*2lm	1200lm	ON-OFF
						24°	920*2lm	1258lm	TRIAC
						36°	920*2lm	1351lm	1-10V
						50°	920*2lm	1171lm	DALI
 K-GL38-320TS2D	2*10W	36V	250mA	90	3000K	18°	950*2lm	1240lm	ON-OFF
						24°	950*2lm	1300lm	TRIAC
						36°	950*2lm	1396lm	1-10V
						50°	950*2lm	1210lm	DALI
	2*10W	36V	250mA	90	4000K	18°	1005*2lm	1311lm	ON-OFF
						24°	1005*2lm	1375lm	TRIAC
						36°	1005*2lm	1476lm	1-10V
						50°	1005*2lm	1280lm	DALI




K-GL38-3T-S2D







Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 K-GL38-324F-S2D	2*12W	36V	350mA	90	2700K	18°	1080*2lm	1356lm	ON-OFF
						24°	1080*2lm	1490lm	TRIAC
						36°	1080*2lm	1486lm	1-10V
						50°	1080*2lm	1387lm	DALI
 K-GL38-324TS2D	2*12W	36V	350mA	90	3000K	18°	1130*2lm	1488lm	ON-OFF
						24°	1130*2lm	1560lm	TRIAC
						36°	1130*2lm	1555lm	1-10V
						50°	1130*2lm	1452lm	DALI
	2*12W	36V	350mA	90	4000K	18°	1180*2lm	1550lm	ON-OFF
						24°	1180*2lm	1629lm	TRIAC
						36°	1180*2lm	1623lm	1-10V
						50°	1180*2lm	1516lm	DALI
 K-GL38-330F-S2D	2*15W	36V	350mA	90	2700K	18°	1230*2lm	1779lm	ON-OFF
						24°	1230*2lm	1847lm	TRIAC
						36°	1230*2lm	1841lm	1-10V
						50°	1230*2lm	1719lm	DALI
 K-GL38-330TS2D	2*15W	36V	350mA	90	3000K	18°	1300*2lm	1881lm	ON-OFF
						24°	1300*2lm	1953lm	TRIAC
						36°	1300*2lm	1946lm	1-10V
						50°	1300*2lm	1817lm	DALI
	2*15W	36V	350mA	90	4000K	18°	1365*2lm	2000lm	ON-OFF
						24°	1365*2lm	2073lm	TRIAC
						36°	1365*2lm	2065lm	1-10V
						50°	1365*2lm	1928lm	DALI

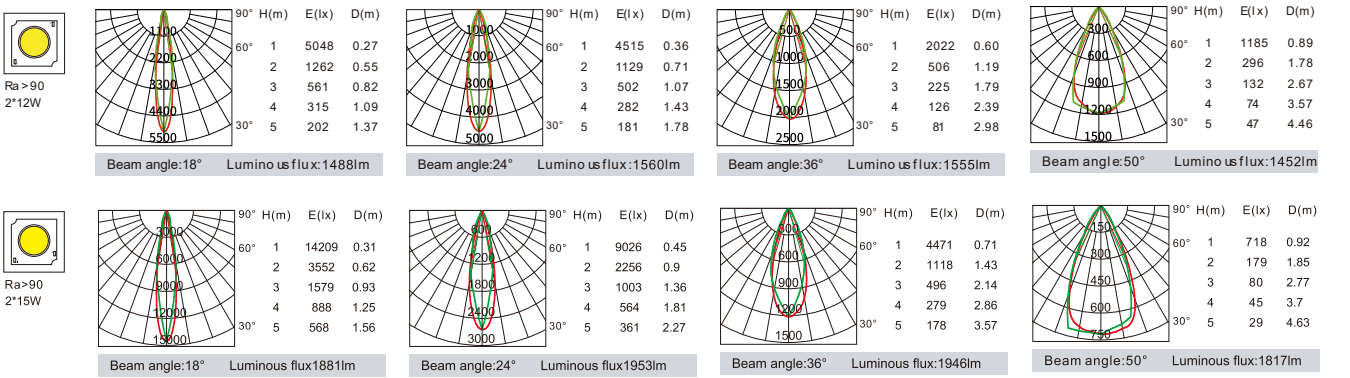


K-CL28




-Patented design with our model heat sink system,the soft lighting spot can be choose different combination and size,power for same design, can be widely used for the commercial site and office site and etc.
-Aluminium die casting material,improvement of the traditional heat sink avoid the potential risk during working;
-Electrostatic painting,save the color consistency;
-Superior quality PC cover,High light transmittance and optical soft, without astigmatism.

Model	K-CL28-210F	K-CL28-210T
Product Photo		
Dimension(mm)		
Cutout(mm)	50	50
Wattage	10W	10W
CCT	2700K/3000K/4000K	2700K/3000K/4000K
CRI	>90	>90
Beam Angle	15°/24°/36°	15°/24°/36°
Lumen	892-1070LM	892-1070LM
IP	IP 20	IP 20
Dimming	TRIAC/1-10V/ON-OFF	TRIAC/1-10V/ON-OFF


KAS-CL28-2F

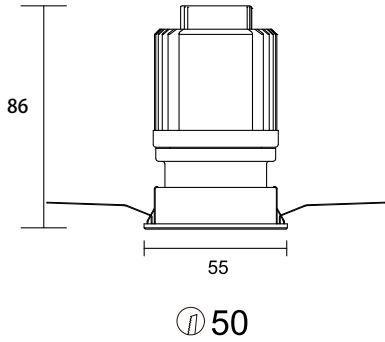


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	10W	36V	250mA	90	2700K	15°	935lm	725lm	ON-OFF
						24°	935lm	698lm	TRIAC
						36°	935lm	662lm	1-10V
	10W	36V	250mA	90	3000K	15°	991lm	769lm	ON-OFF
						24°	991lm	740lm	TRIAC
						36°	991lm	702lm	1-10V
	10W	36V	250mA	90	4000K	15°	1078lm	836lm	ON-OFF
						24°	1078lm	804lm	TRIAC
						36°	1078lm	763lm	1-10V

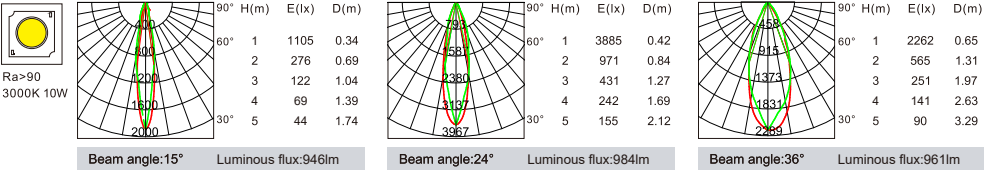

KAS-CL28-2T



Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	10W	36V	250mA	90	2700K	15°	935lm	725lm	ON-OFF
						24°	935lm	698lm	TRIAC
						36°	935lm	662lm	1-10V
	10W	36V	250mA	90	3000K	15°	991lm	769lm	ON-OFF
						24°	991lm	740lm	TRIAC
						36°	991lm	702lm	1-10V
	10W	36V	250mA	90	4000K	15°	1078lm	836lm	ON-OFF
						24°	1078lm	804lm	TRIAC
						36°	1078lm	763lm	1-10V

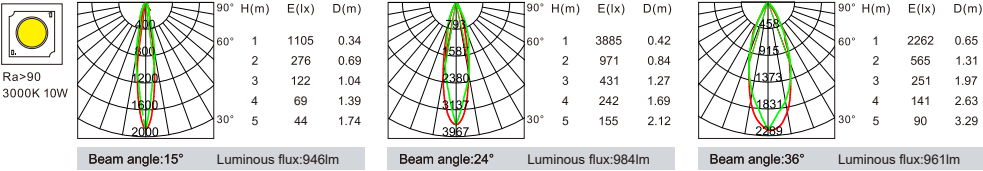



With compact design, bar light has comfortable light for small space, bar counter of guest room, internal of cabinet and so on.



Black



Highly specular aluminium



White



Gold

KAS-CL25



- Selective chip with Ra>90
- The minimum cutout size is 17mm, small and delicate.
- The total height of the light is only 13.5mm, suitable for ceiling which has small space inside and will not damage the ceiling.
- Use good quality aluminum alloy die-casting lamp body, high efficiency heat dissipation.
- Anti-glare designed lamp body, shading angle $\geq 30^{\circ}$, UGR ≤ 19
- Clips installation design, simple and easy installation.

Contact details

IINNO Ltd

Unit 7, 8/F., Tower B,
83 King Lam Street,
Lai Chi Kok, Kowloon,
Hong Kong

Tel: +852 2134 9906

+86 (0)769 23010151/2

M: +86 13922905402

Email: sales@iinno-lighting.com

www.iinno-lighting.com

