


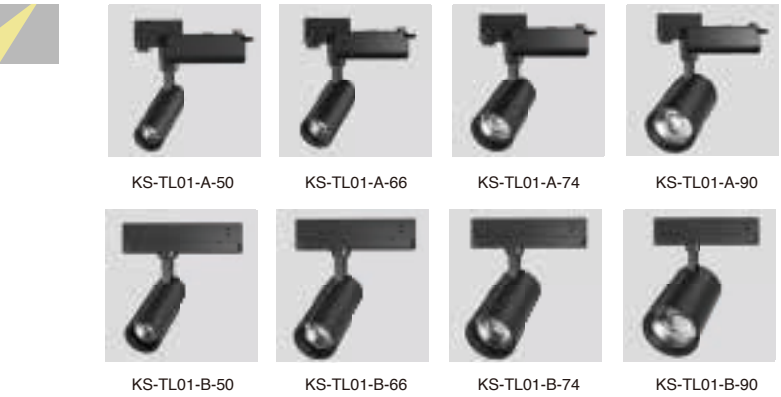
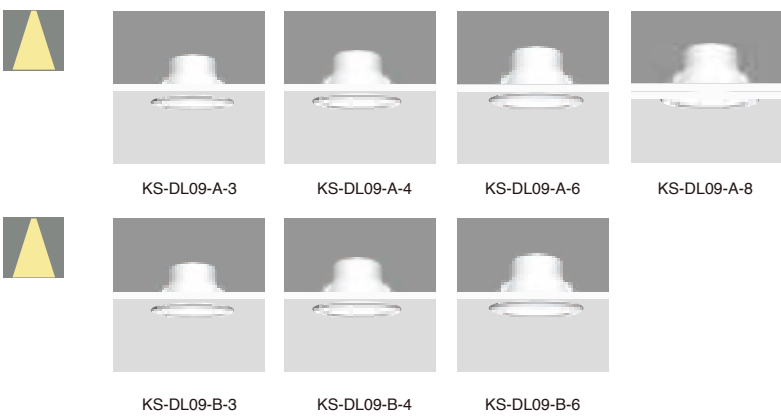


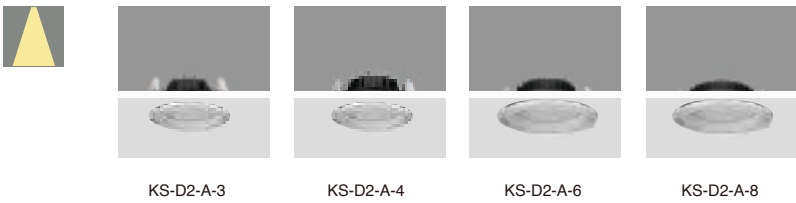

Eco down light

Designing your lighting solutions

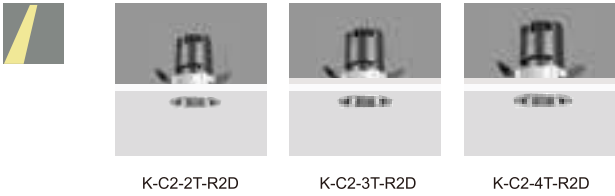

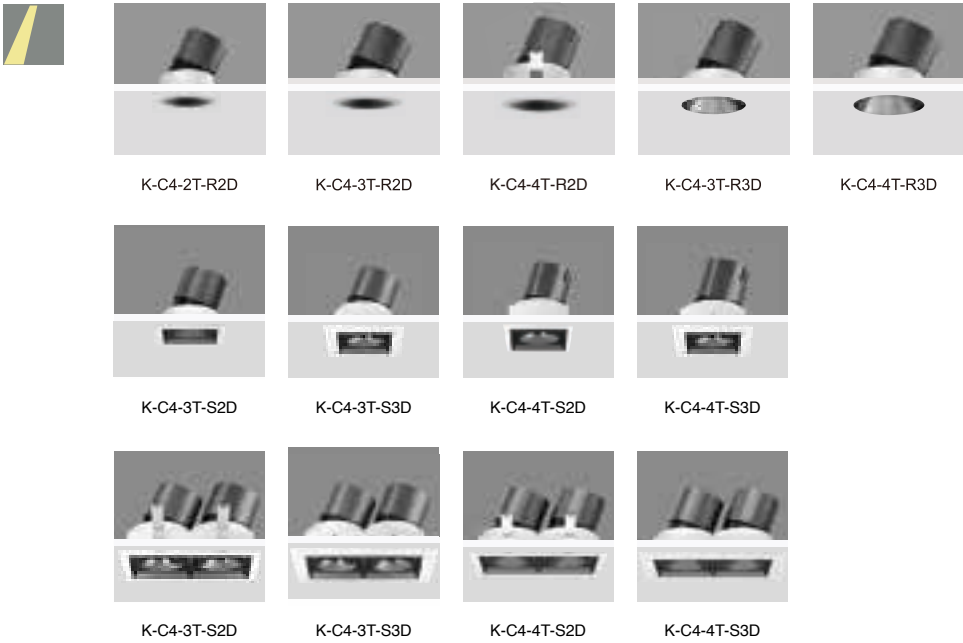











CL37 series









The lamp body adopt aluminum material, high heat dissipation, corrosion resistant and durable. Various type of ceiling lights: Square, round, square-oblique, round-oblique. With lens optics, the light effect is higher and the spot is more evenly. The front ring using high-quality pc make the whole lamp more lighter. The products apply to home, shopping malls, hotels, stores and clubs.

CL37 series



K-CL37-3F-R2G Power: 5W/8W Cutout: 75mm Height: 80mm 	K-CL37-3F-R2G Power: 10W/12W/15W Cutout: 75mm Height: 103mm 	K-CL37-35F-R2G Power: 5W/8W Cutout: 90mm Height: 100mm 	K-CL37-35F-R2G Power: 10W/12W/15W Cutout: 90mm Height: 123mm 	K-CL37-3W-R2G Power: 5W/8W Cutout: 75mm Height: 80mm 	K-CL37-3W-R2G Power: 10W/12W/15W Cutout: 75mm Height: 103mm 	K-CL37-35W-R2G Power: 5W/8W Cutout: 90mm Height: 100mm 	K-CL37-35W-R2G Power: 10W/12W/15W Cutout: 90mm Height: 123mm 
---	--	---	---	---	--	---	---

CL37 series

Model	K-CL37-305F-R2G	K-CL37-310F-R2G	K-CL37-3505F-R2G	K-CL37-3510F-R2G		K-CL37-305W-R2G	K-CL37-310W-R2G	K-CL37-3505W-R2G	K-CL37-3510W-R2G
Product Photo									
Dimension(mm)									
Cutout(mm)	75	75	90	90		75	75	90	90
Wattage	5W/8W	10W/12W/15W	5W/8W	10W/12W/15W		5W/8W	10W/12W/15W	5W/8W	10W/12W/15W
CCT	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K		2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K
CRI	>90	>90	>90	>90		>90	>90	>90	>90
Beam Angle	28°/38°/55°	28°/38°/55°	28°/38°/55°	28°/38°/55°		28°/38°/55°	28°/38°/55°	28°/38°/55°	28°/38°/55°
Lumen	776LM	1076LM	776LM	1076LM		776LM	1076LM	776LM	1076LM
IP	IP44/IP20	IP44/IP20	IP44/IP20	IP44/IP20		IP44/IP20	IP44/IP20	IP44/IP20	IP44/IP20
Dimming	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI		TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI
Reflector Colour	Matt Silver black Gold White Red	Matt Silver black Gold White Red	Matt Silver blac Gold White Red	Matt Silver black Gold White Red		Matt Silver black Gold White Red	Matt Silver black Gold White Red	Matt Silver black Gold White Red	Matt Silver black Gold White Red
Colour	White/black	White/black	White/black	White/black		White/black	White/black	White/black	White/black

Reflecting Accessories











White


Red

Gold



Matt Silver

Black


CL37 series

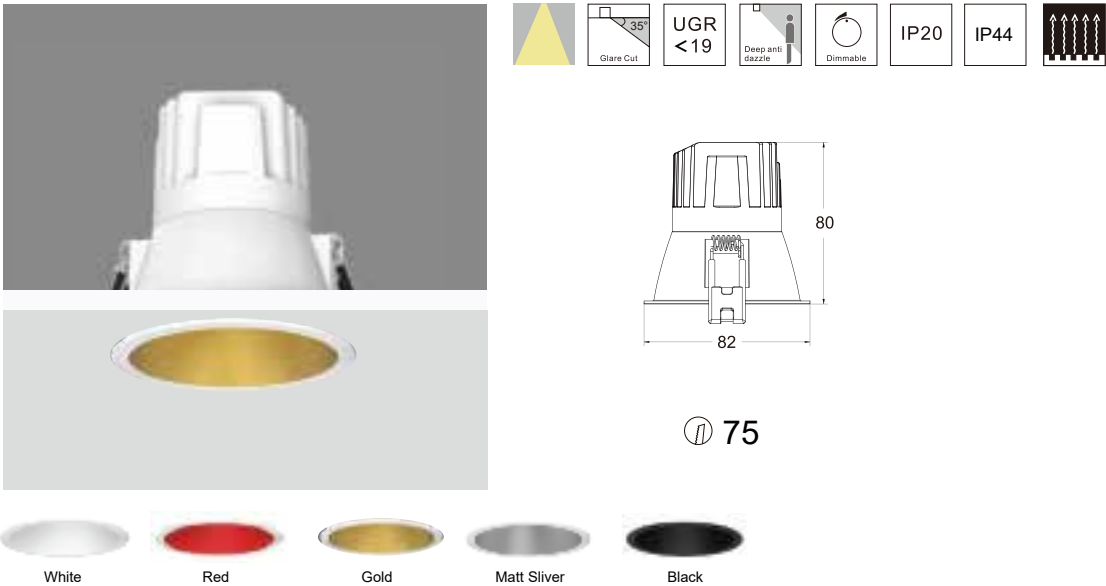


	Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	K-CL37-305F-R2G	5W	34V	120mA	90	2700K	28° 38° 55°	710lm 710lm 710lm	470lm 449lm 452lm	ON-OFF TRIAC 1-10V DALI
		5W	34V	120mA	90	3000K	28° 38° 55°	746lm 746lm 746lm	494lm 472lm 475lm	ON-OFF TRIAC 1-10V DALI
		5W	34V	120mv	90	4000K	28° 38° 55°	798lm 798lm 798lm	528lm 504lm 508lm	ON-OFF TRIAC 1-10V DALI
	K-CL37-308F-R2G	8W	34V	200mA	90	2700K	28° 38° 55°	852lm 852lm 852lm	755lm 707lm 720lm	ON-OFF TRIAC 1-10V DALI
		8W	34V	200mA	90	3000K	28° 38° 55°	895lm 895lm 895lm	794lm 743lm 757lm	ON-OFF TRIAC 1-10V DALI
		8W	34V	200mA	90	4000K	28° 38° 55°	957lm 957lm 957lm	849lm 794lm 809lm	ON-OFF TRIAC 1-10V DALI

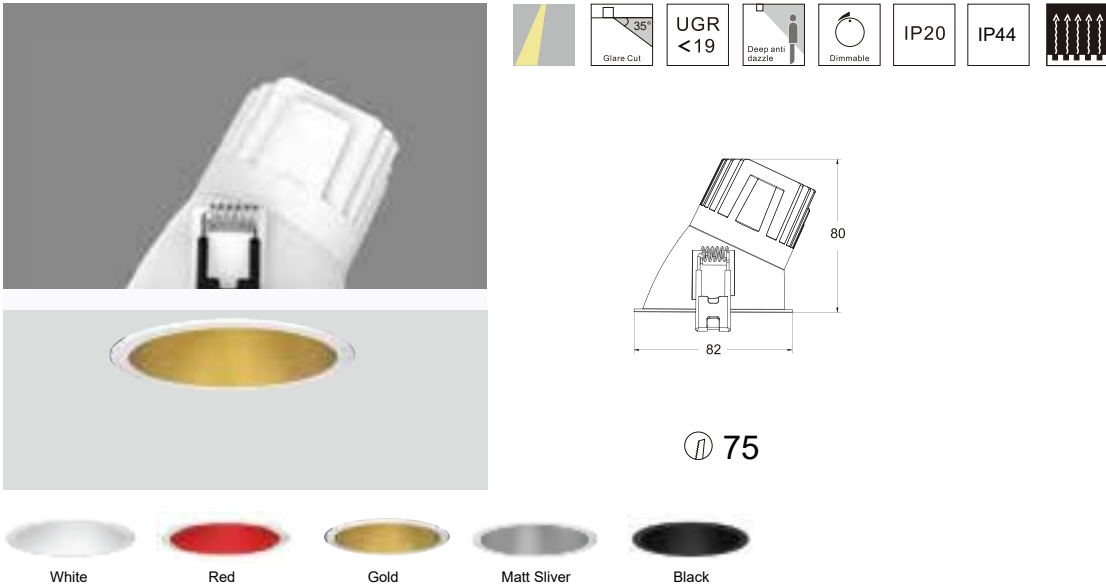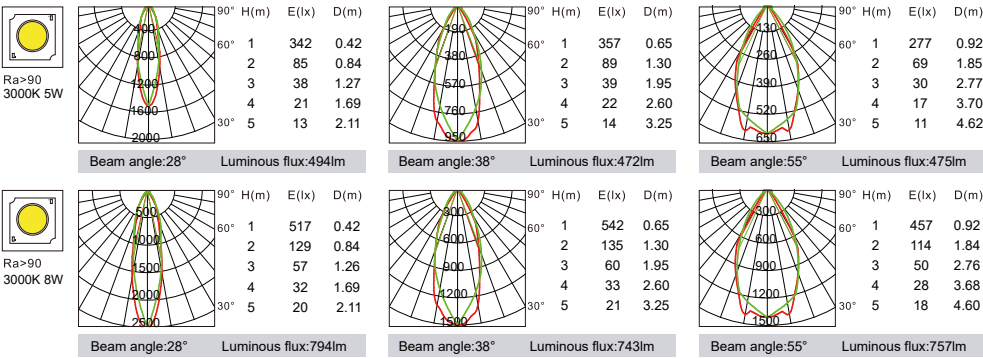



	Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	K-CL37-305W-R2G	5W	34V	120mA	90	2700K	28° 38° 55°	710lm 710lm 710lm	436lm 419lm 418lm	ON-OFF TRIAC 1-10V DALI
		5W	34V	120mA	90	3000K	28° 38° 55°	746lm 746lm 746lm	459lm 441lm 440lm	ON-OFF TRIAC 1-10V DALI
		5W	34V	120mv	90	4000K	28° 38° 55°	798lm 798lm 798lm	487lm 468lm 467lm	ON-OFF TRIAC 1-10V DALI
	K-CL37-308W-R2G	8W	34V	200mA	90	2700K	28° 38° 55°	852lm 852lm 852lm	704lm 667lm 663lm	ON-OFF TRIAC 1-10V DALI
		8W	34V	200mA	90	3000K	28° 38° 55°	895lm 895lm 895lm	740lm 701lm 697lm	ON-OFF TRIAC 1-10V DALI
		8W	34V	200mA	90	4000K	28° 38° 55°	957lm 957lm 957lm	785lm 744lm 739lm	ON-OFF TRIAC 1-10V DALI

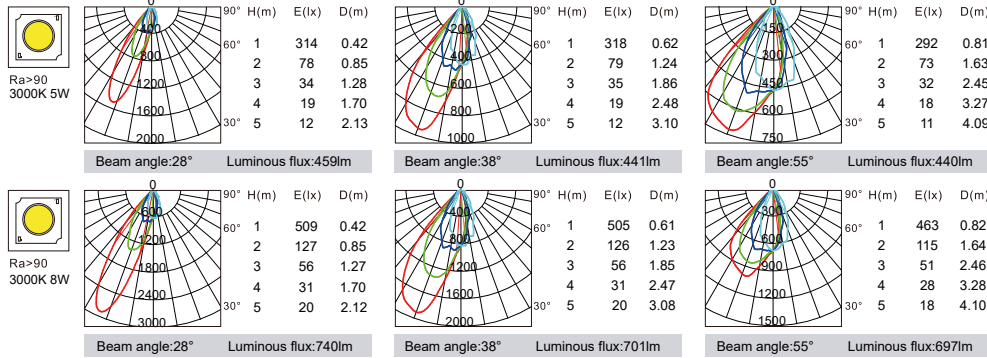


CL37 series

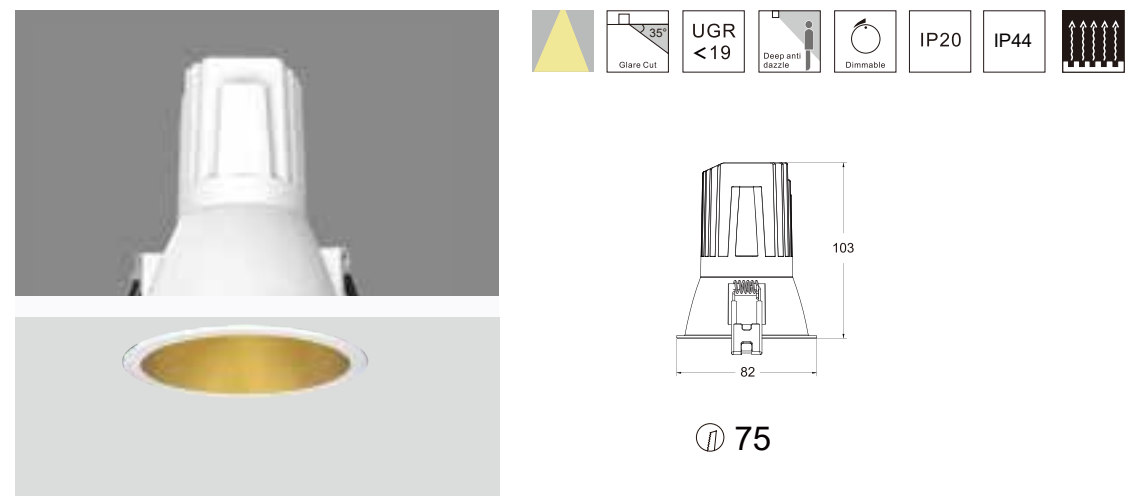


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 K-CL37-310F-R2G	10W	34V	250mA	90	2700K	28°	965lm	888lm	ON-OFF TRIAC
						38°	965lm	835lm	1-10V
						55°	965lm	927lm	DALI
	10W	34V	250mA	90	3000K	28°	1015lm	935lm	ON-OFF TRIAC
						38°	1015lm	879lm	1-10V
						55°	1015lm	882lm	DALI
	10W	34V	250mA	90	4000K	28°	1077lm	992lm	ON-OFF TRIAC
						38°	1077lm	932lm	1-10V
						55°	1077lm	935lm	DALI
 K-CL37-312F-R2G	12W	34V	300mA	90	2700K	28°	1159lm	1002lm	ON-OFF TRIAC
						38°	1159lm	953lm	1-10V
						55°	1159lm	1004lm	DALI
	12W	34V	300mA	90	3000K	28°	1218lm	1054lm	ON-OFF TRIAC
						38°	1218lm	1002lm	1-10V
						55°	1218lm	1056lm	DALI
	12W	34V	300mA	90	4000K	28°	1293lm	1118lm	ON-OFF TRIAC
						38°	1293lm	1063lm	1-10V
						55°	1293lm	1121lm	DALI

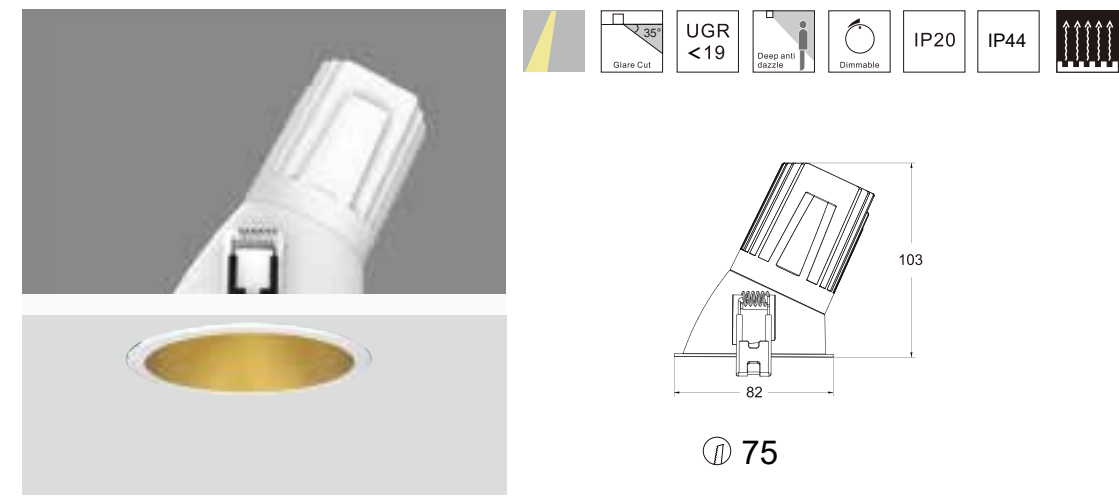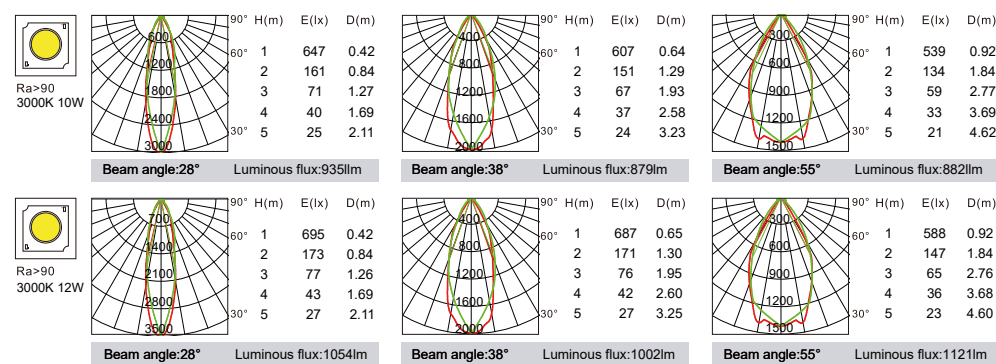


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 K-CL37-310W-R2G	10W	34V	250mA	90	2700K	28°	965lm	826lm	ON-OFF TRIAC
						38°	965lm	780lm	1-10V
						55°	965lm	776lm	DALI
	10W	34V	250mA	90	3000K	28°	1015lm	869lm	ON-OFF TRIAC
						38°	1015lm	821lm	1-10V
						55°	1015lm	817lm	DALI
	10W	34V	250mA	90	4000K	28°	1077lm	922lm	ON-OFF TRIAC
						38°	1077lm	871lm	1-10V
						55°	1077lm	866lm	DALI
 K-CL37-312W-R2G	12W	34V	300mA	90	2700K	28°	1159lm	877lm	ON-OFF TRIAC
						38°	1159lm	893lm	1-10V
						55°	1159lm	887lm	DALI
	12W	34V	300mA	90	3000K	28°	1218lm	922lm	ON-OFF TRIAC
						38°	1218lm	939lm	1-10V
						55°	1218lm	933lm	DALI
	12W	34V	300mA	90	4000K	28°	1293lm	978lm	ON-OFF TRIAC
						38°	1293lm	996lm	1-10V
						55°	1293lm	990lm	DALI

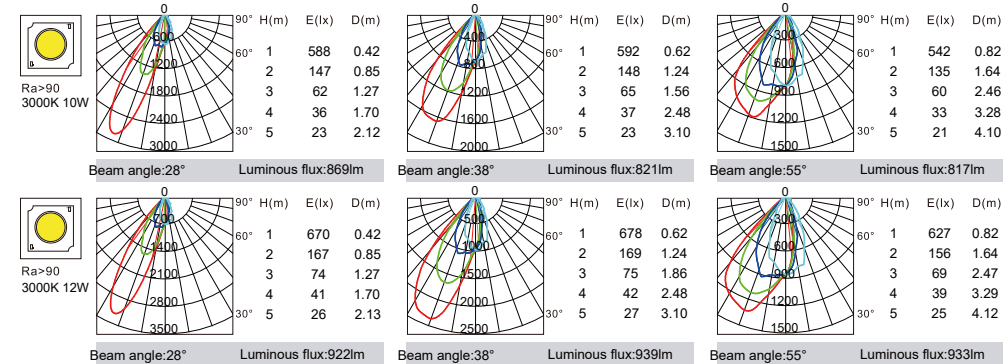


CL37 series

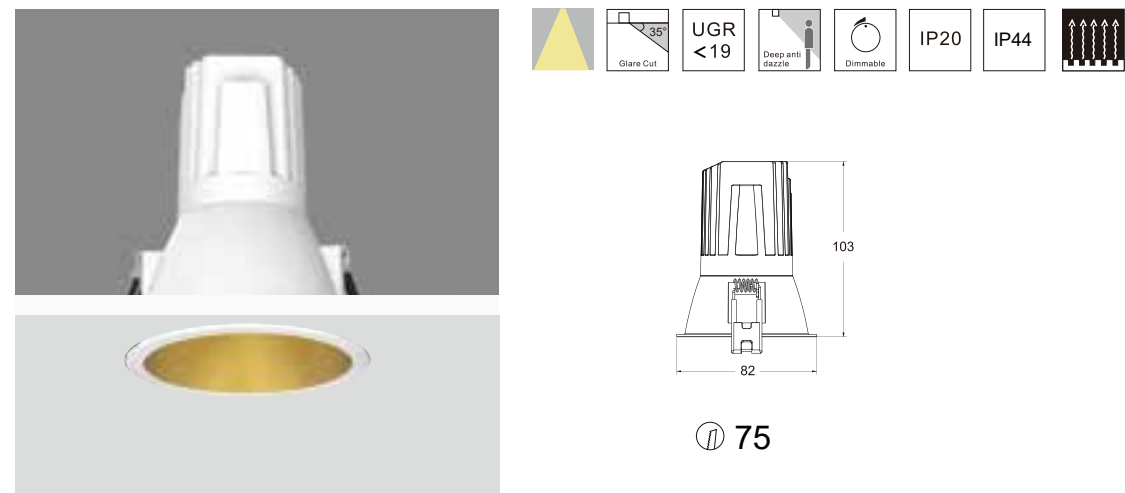

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 K-CL37-315F-R2G	15W	34V	350mA	90	2700K	28°	1314lm	1132lm	ON-OFF TRIAC 1-10V DALI
						38°	1314lm	1076lm	
						55°	1314lm	1079lm	
	15W	34V	350mA	90	3000K	28°	1383lm	1192lm	ON-OFF TRIAC 1-10V DALI
						38°	1383lm	1133lm	
						55°	1383lm	1136lm	
	15W	34V	350mA	90	4000K	28°	1467lm	1123lm	ON-OFF TRIAC 1-10V DALI
						38°	1467lm	1201lm	
						55°	1467lm	1204lm	

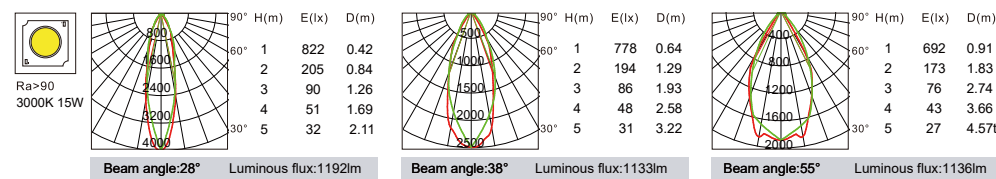



Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 K-CL37-315W-R2G	15W	34V	350mA	90	2700K	28°	1314lm	1068lm	ON-OFF TRIAC 1-10V DALI
						38°	1314lm	1038lm	
						55°	1314lm	1017lm	
	15W	34V	350mA	90	3000K	28°	1383lm	1125lm	ON-OFF TRIAC 1-10V DALI
						38°	1383lm	1093lm	
						55°	1383lm	1071lm	
	15W	34V	350mA	90	4000K	28°	1467lm	1193lm	ON-OFF TRIAC 1-10V DALI
						38°	1467lm	1159lm	
						55°	1467lm	1136lm	

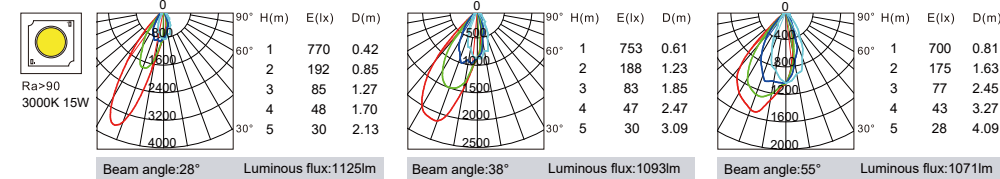


CL37 series




Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
K-CL37-3505F-R2G	5W	34V	120mA	90	2700K	28° 38° 55°	710lm 710lm 710lm	470lm 449lm 452lm	ON-OFF TRIAC 1-10V DALI
	5W	34V	120mA	90	3000K	28° 38° 55°	746lm 746lm 746lm	494lm 472lm 475lm	ON-OFF TRIAC 1-10V DALI
	5W	34V	120mA	90	4000K	28° 38° 55°	798lm 798lm 798lm	528lm 504lm 508lm	ON-OFF TRIAC 1-10V DALI
K-CL37-3508F-R2G	8W	34V	200mA	90	2700K	28° 38° 55°	852lm 852lm 852lm	755lm 707lm 720lm	ON-OFF TRIAC 1-10V DALI
	8W	34V	200mA	90	3000K	28° 38° 55°	895lm 895lm 895lm	794lm 743lm 757lm	ON-OFF TRIAC 1-10V DALI
	8W	34V	200mA	90	4000K	28° 38° 55°	957lm 957lm 957lm	849lm 794lm 809lm	ON-OFF TRIAC 1-10V DALI

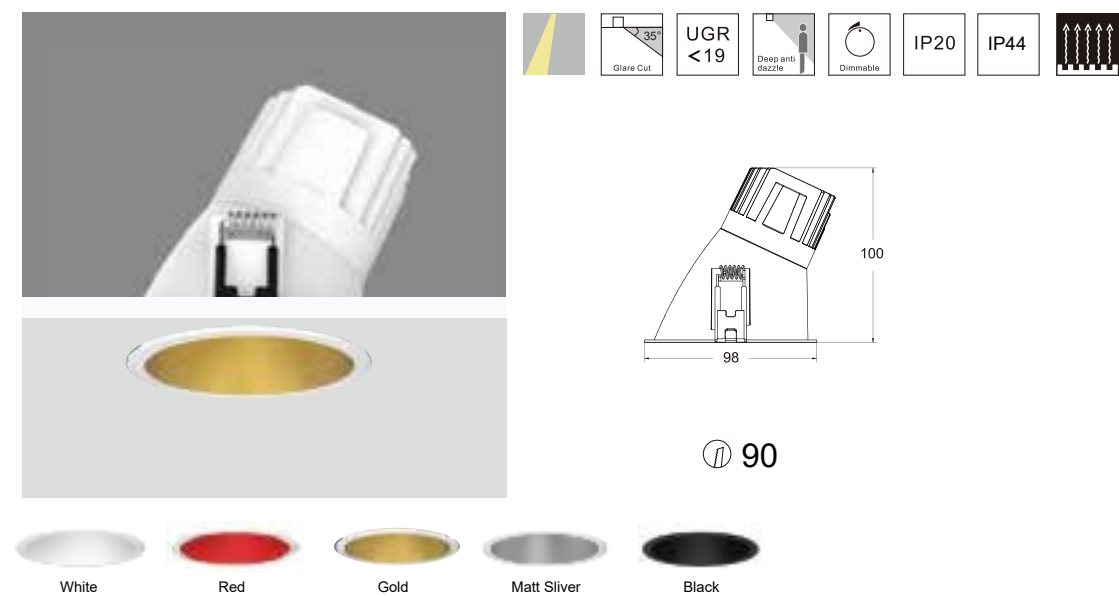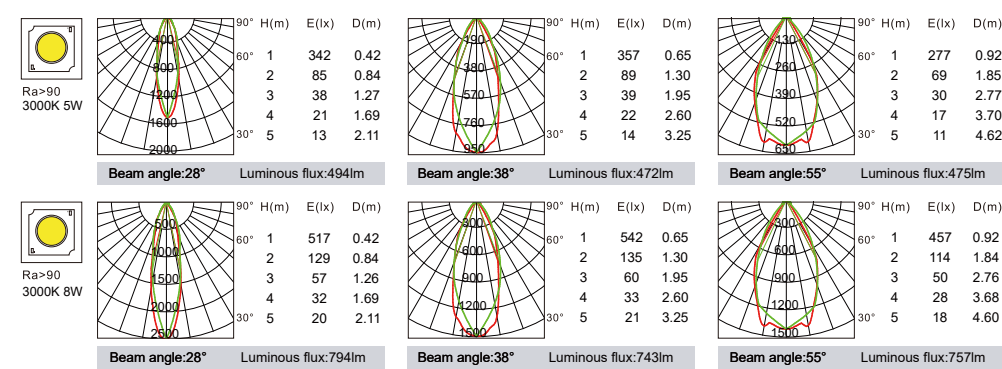



Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
K-CL37-3505W-R2G	5W	34V	120mA	90	2700K	28° 38° 55°	710lm 710lm 710lm	436lm 419lm 418lm	ON-OFF TRIAC 1-10V DALI
	5W	34V	120mA	90	3000K	28° 38° 55°	746lm 746lm 746lm	459lm 441lm 440lm	ON-OFF TRIAC 1-10V DALI
	5W	34V	120mv	90	4000K	28° 38° 55°	798lm 798lm 798lm	487lm 468lm 467lm	ON-OFF TRIAC 1-10V DALI
K-CL37-3508W-R2G	8W	34V	200mA	90	2700K	28° 38° 55°	852lm 852lm 852lm	704lm 667lm 663lm	ON-OFF TRIAC 1-10V DALI
	8W	34V	200mA	90	3000K	28° 38° 55°	895lm 895lm 895lm	740lm 701lm 697lm	ON-OFF TRIAC 1-10V DALI
	8W	34V	200mA	90	4000K	28° 38° 55°	957lm 957lm 957lm	785lm 744lm 739lm	ON-OFF TRIAC 1-10V DALI

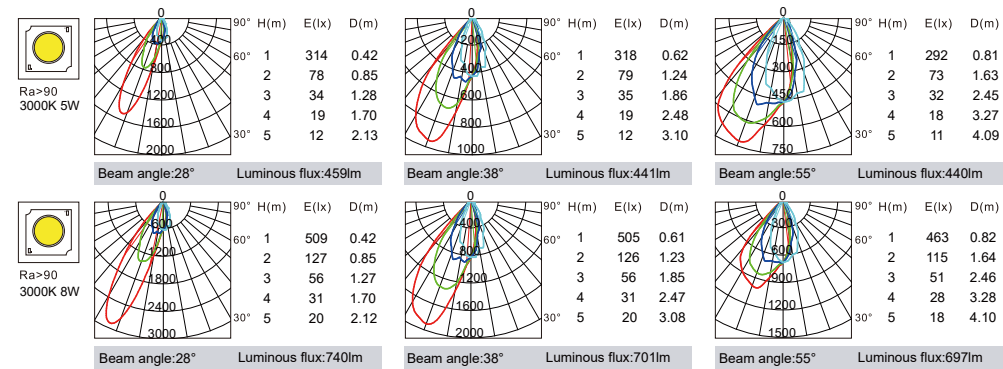


CL37 series

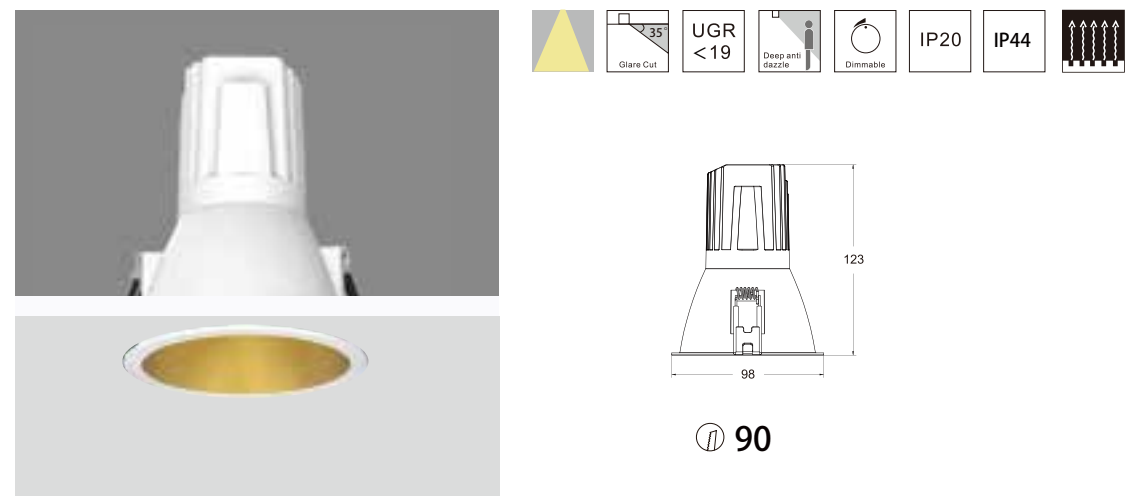


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
K-CL37-3510F-R2G	10W	34V	250mA	90	2700K	28° 38° 55°	965lm 965lm 965lm	888lm 835lm 927lm	ON-OFF TRIAC 1-10V DALI
	10W	34V	250mA	90	3000K	28° 38° 55°	1015lm 1015lm 1015lm	935lm 879lm 882lm	ON-OFF TRIAC 1-10V DALI
	10W	34V	250mA	90	4000K	28° 38° 55°	1077lm 1077lm 1077lm	992lm 932lm 935lm	ON-OFF TRIAC 1-10V DALI
K-CL37-3512F-R2G	12W	34V	300mA	90	2700K	28° 38° 55°	1159lm 1159lm 1159lm	1002lm 953lm 1004lm	ON-OFF TRIAC 1-10V DALI
	12W	34V	300mA	90	3000K	28° 38° 55°	1218lm 1218lm 1218lm	1054lm 1002lm 1056lm	ON-OFF TRIAC 1-10V DALI
	12W	34V	300mA	90	4000K	28° 38° 55°	1293lm 1293lm 1293lm	1118lm 1063lm 1121lm	ON-OFF TRIAC 1-10V DALI

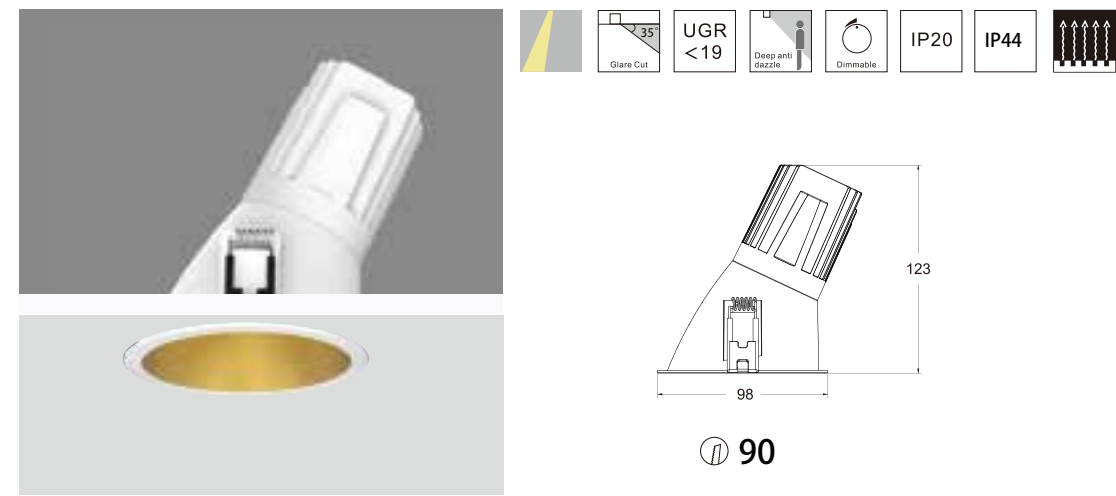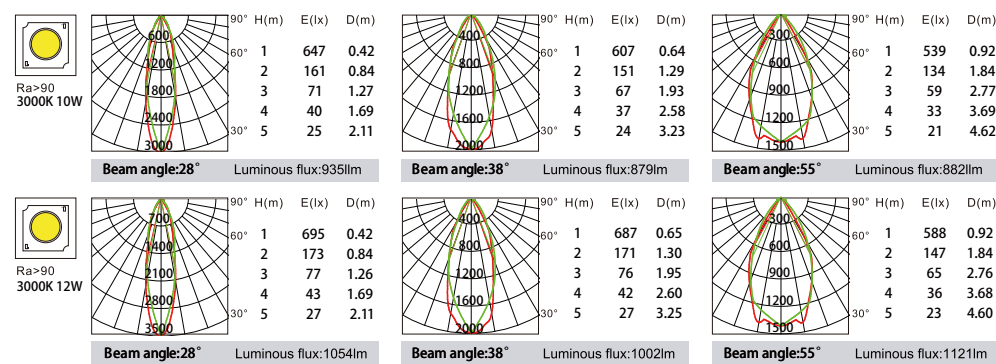



Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
K-CL37-3510W-R2G	10W	34V	250mA	90	2700K	28° 38° 55°	965lm 965lm 965lm	826lm 780lm 776lm	ON-OFF TRIAC 1-10V DALI
	10W	34V	250mA	90	3000K	28° 38° 55°	1015lm 1015lm 1015lm	869lm 821lm 817lm	ON-OFF TRIAC 1-10V DALI
	10W	34V	250mA	90	4000K	28° 38° 55°	1077lm 1077lm 1077lm	922lm 871lm 866lm	ON-OFF TRIAC 1-10V DALI
K-CL37-3512W-R2G	12W	34V	300mA	90	2700K	28° 38° 55°	1159lm 1159lm 1159lm	877lm 893lm 887lm	ON-OFF TRIAC 1-10V DALI
	12W	34V	300mA	90	3000K	28° 38° 55°	1218lm 1218lm 1218lm	922lm 939lm 933lm	ON-OFF TRIAC 1-10V DALI
	12W	34V	300mA	90	4000K	28° 38° 55°	1293lm 1293lm 1293lm	978lm 996lm 990lm	ON-OFF TRIAC 1-10V DALI

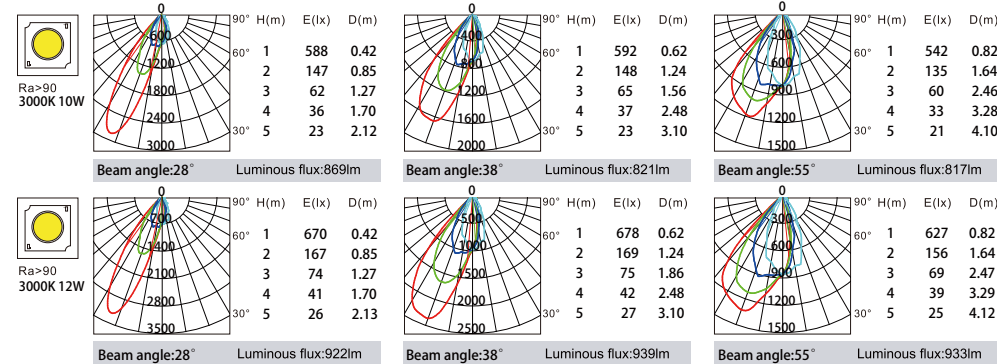


CL37 series

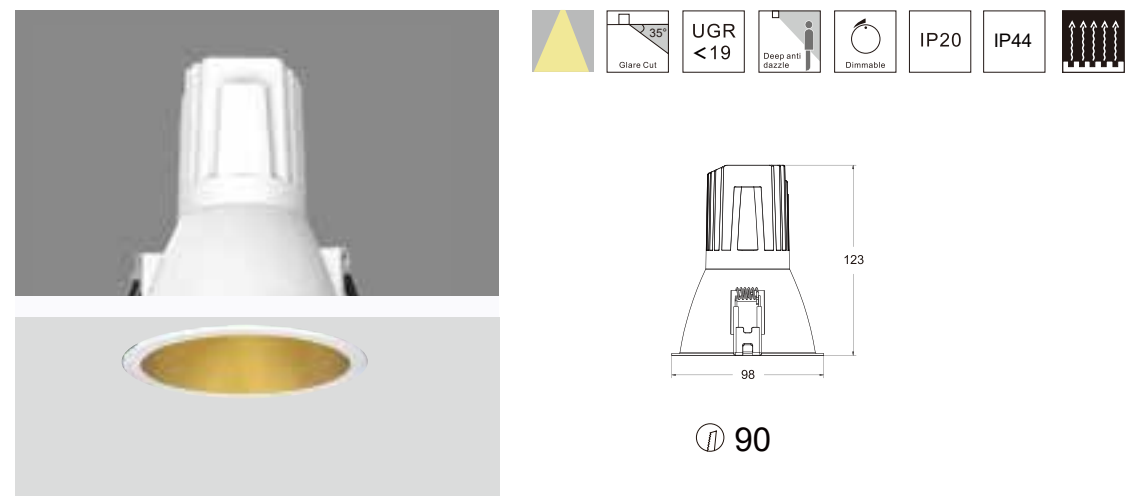

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 K-CL37-3515F-R2G	15W	34V	350mA	90	2700K	28°	1314lm	1068lm	ON-OFF TRIAC 1-10V DALI
						38°	1314lm	1038lm	
						55°	1314lm	1017lm	
	15W	34V	350mA	90	3000K	28°	1383lm	1125lm	ON-OFF TRIAC 1-10V DALI
						38°	1383lm	1093lm	
						55°	1383lm	1071lm	
	15W	34V	350mA	90	4000K	28°	1467lm	1193lm	ON-OFF TRIAC 1-10V DALI
						38°	1467lm	1159lm	
						55°	1467lm	1136lm	







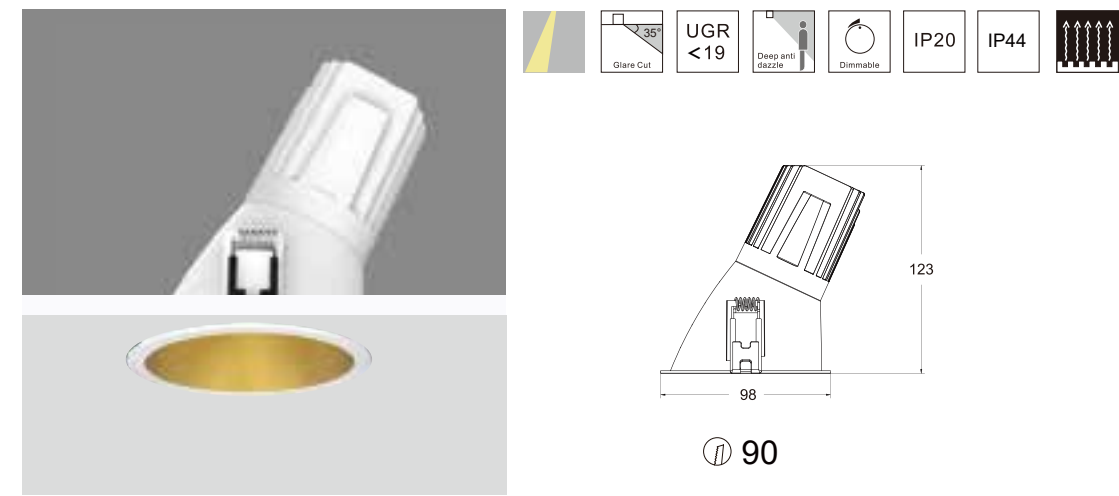
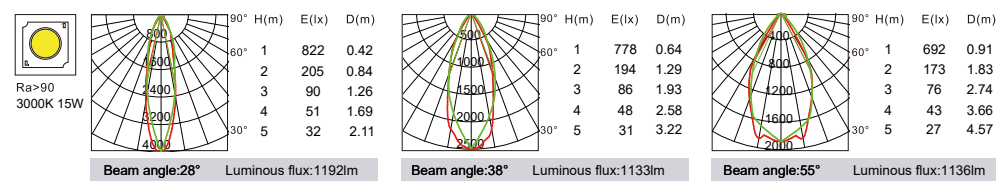


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 K-CL37-3515W-R2G	15W	34V	350mA	90	2700K	28°	1314lm	1068lm	ON-OFF TRIAC 1-10V DALI
						38°	1314lm	1038lm	
						55°	1314lm	1017lm	
	15W	34V	350mA	90	3000K	28°	1383lm	1125lm	ON-OFF TRIAC 1-10V DALI
						38°	1383lm	1093lm	
						55°	1383lm	1071lm	
	15W	34V	350mA	90	4000K	28°	1467lm	1193lm	ON-OFF TRIAC 1-10V DALI
						38°	1467lm	1159lm	
						55°	1467lm	1136lm	








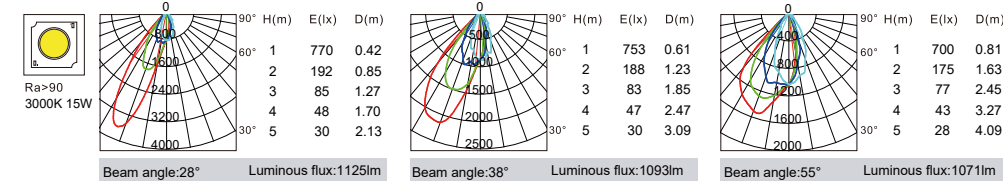


CL37 series



K-CL37-305F-S2G Power:5W/8W Cutout: 75*75mm Height: 80mm 	K-CL37-310F-S2G Power:10W/12W/15W Cutout: 75*75mm Height: 103mm 	K-CL37-3505F-S2G Power:5W/8W Cutout: 90*90mm Height: 100mm 	K-CL37-3510F-S2G Power:10W/12W/15W Cutout: 90*90mm Height: 123mm 	K-CL37-305W-S2G Power:5W/8W Cutout: 75*75mm Height: 80mm 	K-CL37-310W-S2G Power:10W/12W/15W Cutout: 75*75mm Height: 103mm 	K-CL37-3505W-S2G Power:5W/8W Cutout: 90*90mm Height: 100mm 	K-CL37-3510W-S2G Power:10W/12W/15W Cutout: 90*90mm Height: 123mm 
---	--	---	---	---	--	---	---


CL37 series

Model	K-CL37-305F-S2G	K-CL37-310F-S2G	K-CL37-3505F-S2G	K-CL37-3510F-S2G		K-CL37-305W-S2G	K-CL37-310W-S2G	K-CL37-3505W-S2G	K-CL37-3510W-S2G
Product Photo									
Dimension(mm)									
Cutout(mm)	75*75	75*75	90*90	90*90		75*75	75*75	90*90	90*90
Wattage	5W/8W	10W/12W/15W	5W/8W	10W/12W/15W		5W/8W	10W/12W/15W	5W/8W	10W/12W/15W
CCT	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K		2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K
CRI	>90	>90	>90	>90		>90	>90	>90	>90
Beam Angle	28°/38°/55°	28°/38°/55°	28°/38°/55°	28°/38°/55°		28°/38°/55°	28°/38°/55°	28°/38°/55°	28°/38°/55°
Lumen	776LM	1076LM	776LM	1076LM		776LM	1076LM	776LM	1076LM
IP	IP44/IP20	IP44/IP20	IP44/IP20	IP44/IP20		IP44/IP20	IP44/IP20	IP44/IP20	IP44/IP20
Dimming	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI		TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI
Reflector Colour	Matt Silver black Gold White Red	Matt Silver black Gold White Red	Matt Silver black Gold White Red	Matt Silver black Gold White Red		Matt Silver black Gold White Red	Matt Silver black Gold White Red	Matt Silver black Gold White Red	Matt Silver black Gold White Red
Colour	White/black	White/black	White/black	White/black		White/black	White/black	White/black	White/black


Reflecting Accessories




CL37 series

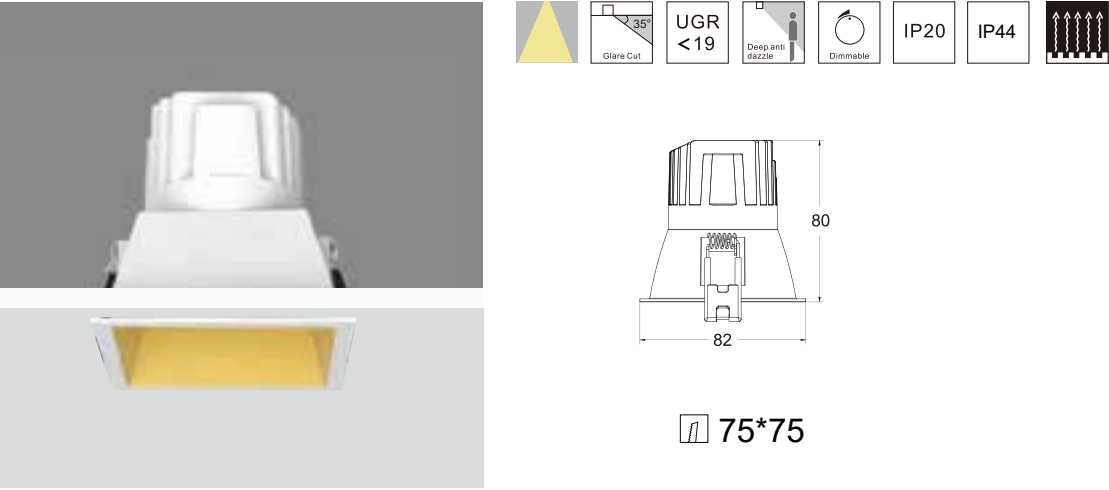


	Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	K-CL37-305F-S2G	5W	34V	120mA	90	2700K	28°	710lm	470lm	ON-OFF
							38°	710lm	449lm	TRIAC
							55°	710lm	452lm	1-10V DALI
		5W	34V	120mA	90	3000K	28°	746lm	494lm	ON-OFF
							38°	746lm	472lm	TRIAC
							55°	746lm	475lm	1-10V DALI
		5W	34V	120mv	90	4000K	28°	798lm	528lm	ON-OFF
							38°	798lm	504lm	TRIAC
							55°	798lm	508lm	1-10V DALI
	K-CL37-308F-S2G	8W	34V	200mA	90	2700K	28°	852lm	755lm	ON-OFF
							38°	852lm	707lm	TRIAC
							55°	852lm	720lm	1-10V DALI
		8W	34V	200mA	90	3000K	28°	895lm	794lm	ON-OFF
							38°	895lm	743lm	TRIAC
							55°	895lm	757lm	1-10V DALI
		8W	34V	200mA	90	4000K	28°	957lm	849lm	ON-OFF
							38°	957lm	794lm	TRIAC
							55°	957lm	809lm	1-10V DALI

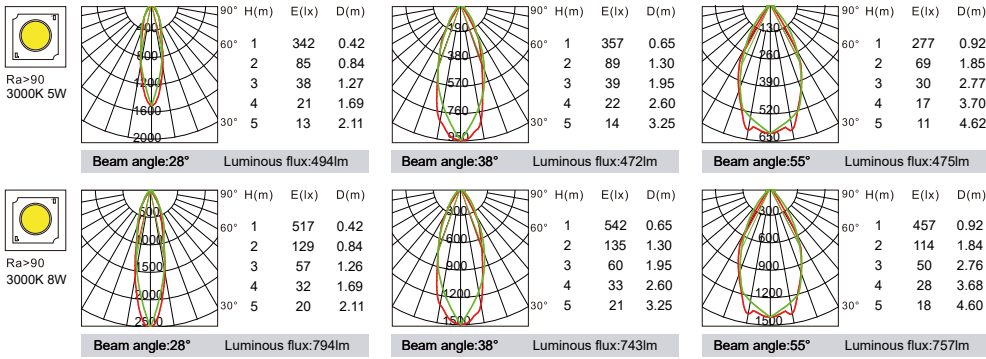


	Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	K-CL37-305W-S2G	5W	34V	120mA	90	2700K	28°	710lm	436lm	ON-OFF TRIAC
							38°	710lm	419lm	1-10V
							55°	710lm	418lm	DALI
		5W	34V	120mA	90	3000K	28°	746lm	459lm	ON-OFF TRIAC
							38°	746lm	441lm	1-10V
							55°	746lm	440lm	DALI
		5W	34V	120mv	90	4000K	28°	798lm	487lm	ON-OFF TRIAC
							38°	798lm	468lm	1-10V
							55°	798lm	467lm	DALI
	K-CL37-308W-S2G	8W	34V	200mA	90	2700K	28°	852lm	704lm	ON-OFF TRIAC
							38°	852lm	667lm	1-10V
							55°	852lm	663lm	DALI
		8W	34V	200mA	90	3000K	28°	895lm	740lm	ON-OFF TRIAC
							38°	895lm	701lm	1-10V
							55°	895lm	697lm	DALI
		8W	34V	200mA	90	4000K	28°	957lm	785lm	ON-OFF TRIAC
							38°	957lm	744lm	1-10V
							55°	957lm	739lm	DALI

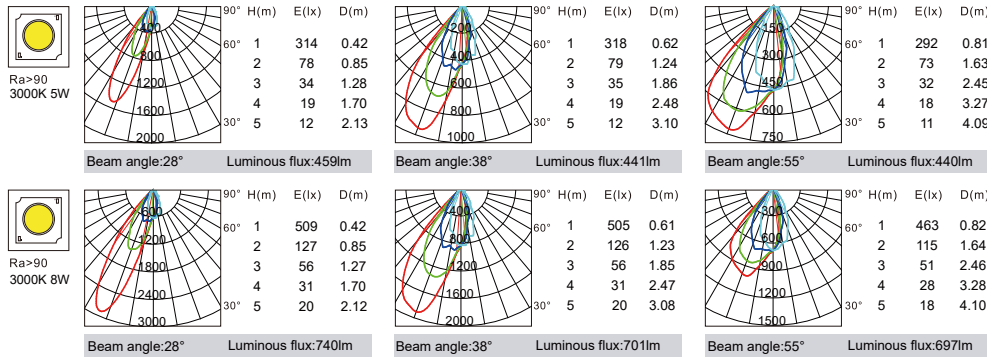


CL37 series

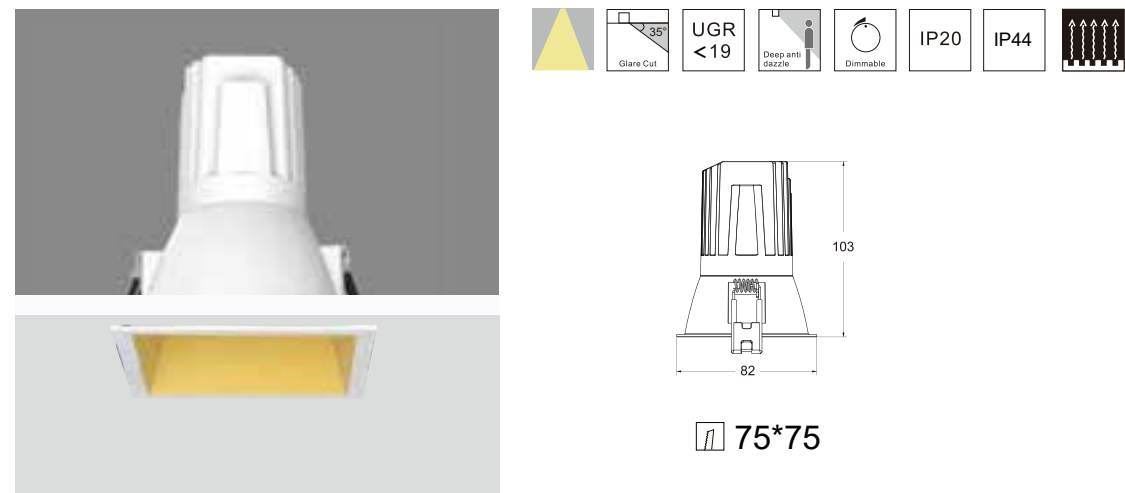


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 K-CL37-310F-S2G	10W	34V	250mA	90	2700K	28°	965lm	888lm	ON-OFF TRIAC 1-10V DALI
						38°	965lm	835lm	
						55°	965lm	927lm	
	10W	34V	250mA	90	3000K	28°	1015lm	935lm	ON-OFF TRIAC 1-10V DALI
						38°	1015lm	879lm	
						55°	1015lm	882lm	
	10W	34V	250mA	90	4000K	28°	1077lm	992lm	ON-OFF TRIAC 1-10V DALI
						38°	1077lm	932lm	
						55°	1077lm	935lm	
 K-CL37-312F-S2G	12W	34V	300mA	90	2700K	28°	1159lm	1002lm	ON-OFF TRIAC 1-10V DALI
						38°	1159lm	953lm	
						55°	1159lm	1004lm	
	12W	34V	300mA	90	3000K	28°	1218lm	1054lm	ON-OFF TRIAC 1-10V DALI
						38°	1218lm	1002lm	
						55°	1218lm	1056lm	
	12W	34V	300mA	90	4000K	28°	1293lm	1118lm	ON-OFF TRIAC 1-10V DALI
						38°	1293lm	1063lm	
						55°	1293lm	1121lm	

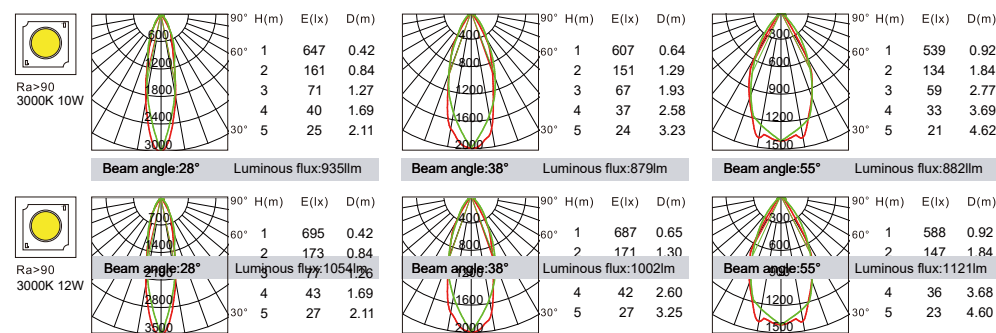


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 K-CL37-310W-S2G	10W	34V	250mA	90	2700K	28°	965lm	826lm	ON-OFF TRIAC 1-10V DALI
						38°	965lm	780lm	
						55°	965lm	776lm	
	10W	34V	250mA	90	3000K	28°	1015lm	869lm	ON-OFF TRIAC 1-10V DALI
						38°	1015lm	821lm	
						55°	1015lm	817lm	
	10W	34V	250mA	90	4000K	28°	1077lm	922lm	ON-OFF TRIAC 1-10V DALI
						38°	1077lm	871lm	
						55°	1077lm	866lm	
 K-CL37-312W-S2G	12W	34V	300mA	90	2700K	28°	1159lm	877lm	ON-OFF TRIAC 1-10V DALI
						38°	1159lm	893lm	
						55°	1159lm	887lm	
	12W	34V	300mA	90	3000K	28°	1218lm	922lm	ON-OFF TRIAC 1-10V DALI
						38°	1218lm	939lm	
						55°	1218lm	933lm	
	12W	34V	300mA	90	4000K	28°	1293lm	978lm	ON-OFF TRIAC 1-10V DALI
						38°	1293lm	996lm	
						55°	1293lm	990lm	

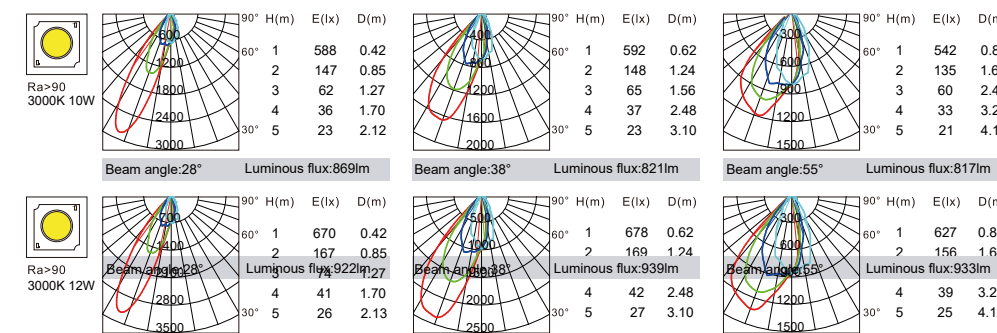


CL37 series

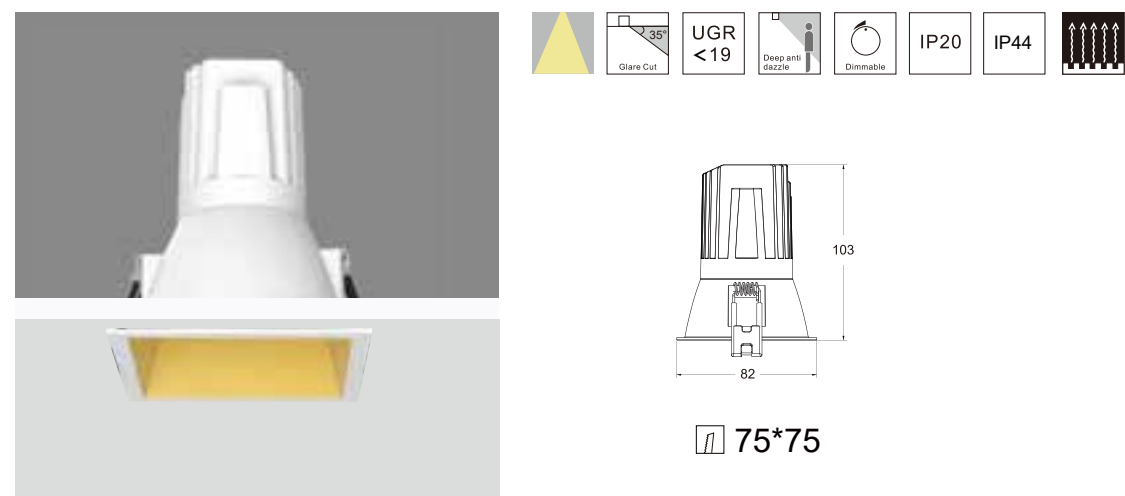


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 K-CL37-315F-S2G	15W	34V	350mA	90	2700K	28°	1314lm	1132lm	ON-OFF TRIAC 1-10V DALI
						38°	1314lm	1076lm	
						55°	1314lm	1079lm	
	15W	34V	350mA	90	3000K	28°	1383lm	1192lm	ON-OFF TRIAC 1-10V DALI
						38°	1383lm	1133lm	
						55°	1383lm	1136lm	
	15W	34V	350mA	90	4000K	28°	1467lm	1123lm	ON-OFF TRIAC 1-10V DALI
						38°	1467lm	1201lm	
						55°	1467lm	1204lm	

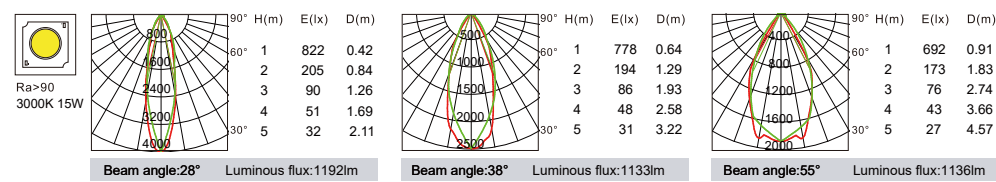

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 K-CL37-315W-S2G	15W	34V	350mA	90	2700K	28°	1314lm	1068lm	ON-OFF TRIAC 1-10V DALI
						38°	1314lm	1038lm	
						55°	1314lm	1017lm	
	15W	34V	350mA	90	3000K	28°	1383lm	1125lm	ON-OFF TRIAC 1-10V DALI
						38°	1383lm	1093lm	
						55°	1383lm	1071lm	
	15W	34V	350mA	90	4000K	28°	1467lm	1193lm	ON-OFF TRIAC 1-10V DALI
						38°	1467lm	1159lm	
						55°	1467lm	1136lm	

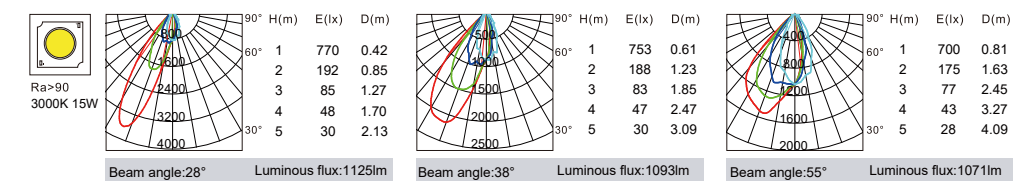



CL37 series



90*90




Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 K-CL37-3505F-S2G	5W	34V	120mA	90	2700K	28°	710lm	470lm	ON-OFF TRIAC 1-10V DALI
						38°	710lm	449lm	
						55°	710lm	452lm	
	5W	34V	120mA	90	3000K	28°	746lm	494lm	ON-OFF TRIAC 1-10V DALI
						38°	746lm	472lm	
						55°	746lm	475lm	
	5W	34V	120mA	90	4000K	28°	798lm	528lm	ON-OFF TRIAC 1-10V DALI
						38°	798lm	504lm	
						55°	798lm	508lm	
 K-CL37-3508F-S2G	8W	34V	200mA	90	2700K	28°	852lm	755lm	ON-OFF TRIAC 1-10V DALI
						38°	852lm	707lm	
						55°	852lm	720lm	
	8W	34V	200mA	90	3000K	28°	895lm	794lm	ON-OFF TRIAC 1-10V DALI
						38°	895lm	743lm	
						55°	895lm	757lm	
	8W	34V	200mA	90	4000K	28°	957lm	849lm	ON-OFF TRIAC 1-10V DALI
						38°	957lm	794lm	
						55°	957lm	809lm	

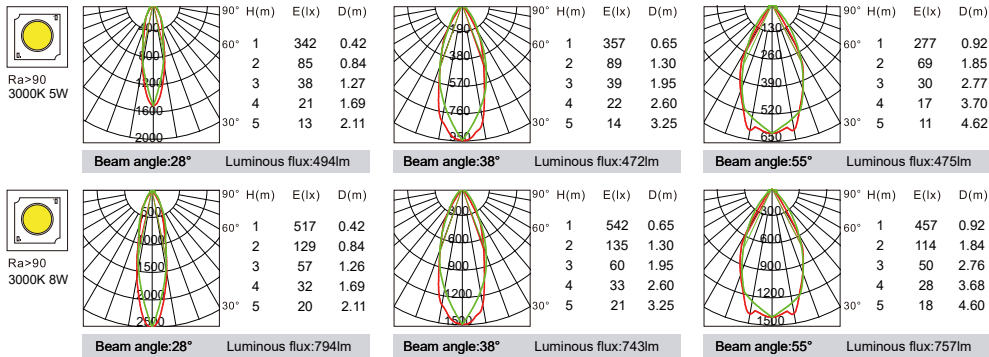



90*90



Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 K-CL37-3505W-S2G	5W	34V	120mA	90	2700K	28°	710lm	436lm	ON-OFF TRIAC 1-10V DALI
						38°	710lm	419lm	
						55°	710lm	418lm	
	5W	34V	120mA	90	3000K	28°	746lm	459lm	ON-OFF TRIAC 1-10V DALI
						38°	746lm	441lm	
						55°	746lm	440lm	
	5W	34V	120mv	90	4000K	28°	798lm	487lm	ON-OFF TRIAC 1-10V DALI
						38°	798lm	468lm	
						55°	798lm	467lm	
 K-CL37-3508W-S2G	8W	34V	200mA	90	2700K	28°	852lm	704lm	ON-OFF TRIAC 1-10V DALI
						38°	852lm	667lm	
						55°	852lm	663lm	
	8W	34V	200mA	90	3000K	28°	895lm	740lm	ON-OFF TRIAC 1-10V DALI
						38°	895lm	701lm	
						55°	895lm	697lm	
	8W	34V	200mA	90	4000K	28°	957lm	785lm	ON-OFF TRIAC 1-10V DALI
						38°	957lm	744lm	
						55°	957lm	739lm	

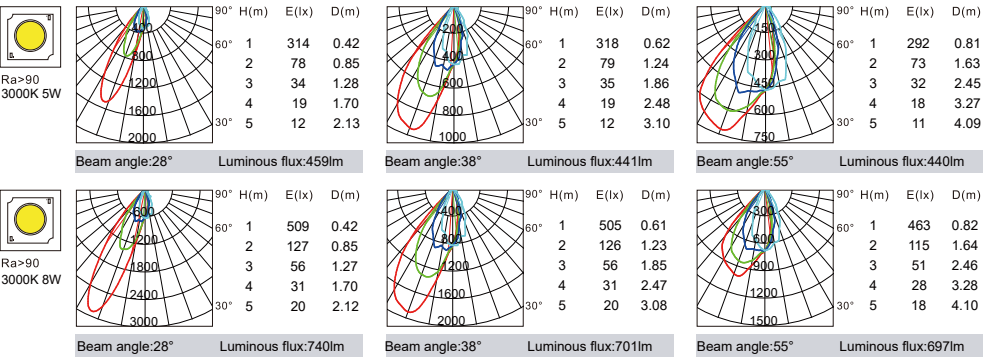




CL37 series



90*90




Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
K-CL37-3510F-S2G	10W	34V	250mA	90	2700K	28°	965lm	888lm	ON-OFF TRIAC
						38°	965lm	835lm	1-10V
						55°	965lm	927lm	DALI
	10W	34V	250mA	90	3000K	28°	1015lm	935lm	ON-OFF TRIAC
						38°	1015lm	879lm	1-10V
						55°	1015lm	882lm	DALI
	10W	34V	250mA	90	4000K	28°	1077lm	992lm	ON-OFF TRIAC
						38°	1077lm	932lm	1-10V
						55°	1077lm	935lm	DALI
K-CL37-3512F-S2G	12W	34V	300mA	90	2700K	28°	1159lm	1002lm	ON-OFF TRIAC
						38°	1159lm	953lm	1-10V
						55°	1159lm	1004lm	DALI
	12W	34V	300mA	90	3000K	28°	1218lm	1054lm	ON-OFF TRIAC
						38°	1218lm	1002lm	1-10V
						55°	1218lm	1056lm	DALI
	12W	34V	300mA	90	4000K	28°	1293lm	1118lm	ON-OFF TRIAC
						38°	1293lm	1063lm	1-10V
						55°	1293lm	1121lm	DALI

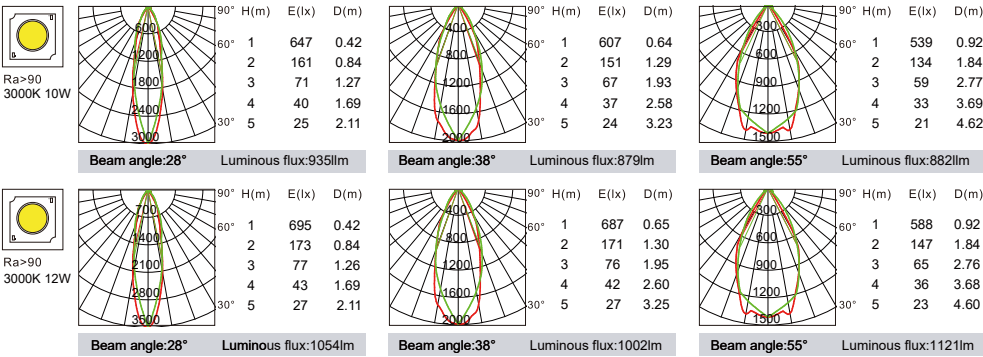


90*90





Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
K-CL37-3510W-S2G	10W	34V	250mA	90	2700K	28°	965lm	826lm	ON-OFF TRIAC
						38°	965lm	780lm	1-10V
						55°	965lm	776lm	DALI
	10W	34V	250mA	90	3000K	28°	1015lm	869lm	ON-OFF TRIAC
						38°	1015lm	821lm	1-10V
						55°	1015lm	817lm	DALI
	10W	34V	250mA	90	4000K	28°	1077lm	922lm	ON-OFF TRIAC
						38°	1077lm	871lm	1-10V
						55°	1077lm	866lm	DALI
K-CL37-3512W-S2G	12W	34V	300mA	90	2700K	28°	1159lm	877lm	ON-OFF TRIAC
						38°	1159lm	893lm	1-10V
						55°	1159lm	887lm	DALI
	12W	34V	300mA	90	3000K	28°	1218lm	922lm	ON-OFF TRIAC
						38°	1218lm	939lm	1-10V
						55°	1218lm	933lm	DALI
	12W	34V	300mA	90	4000K	28°	1293lm	978lm	ON-OFF TRIAC
						38°	1293lm	996lm	1-10V
						55°	1293lm	990lm	DALI

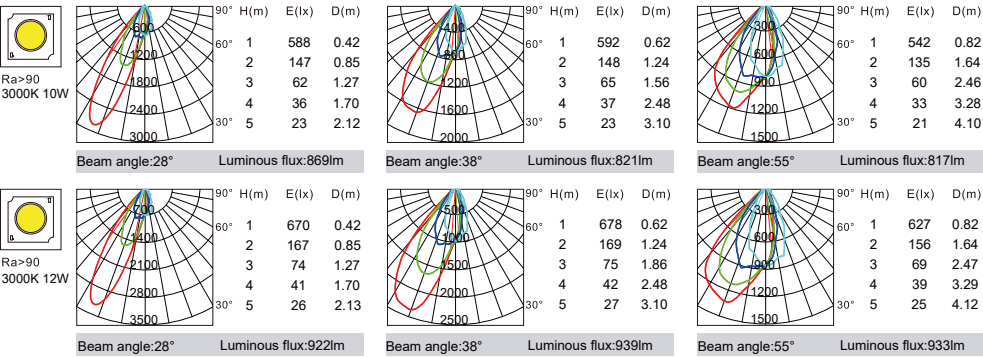


CL37 series

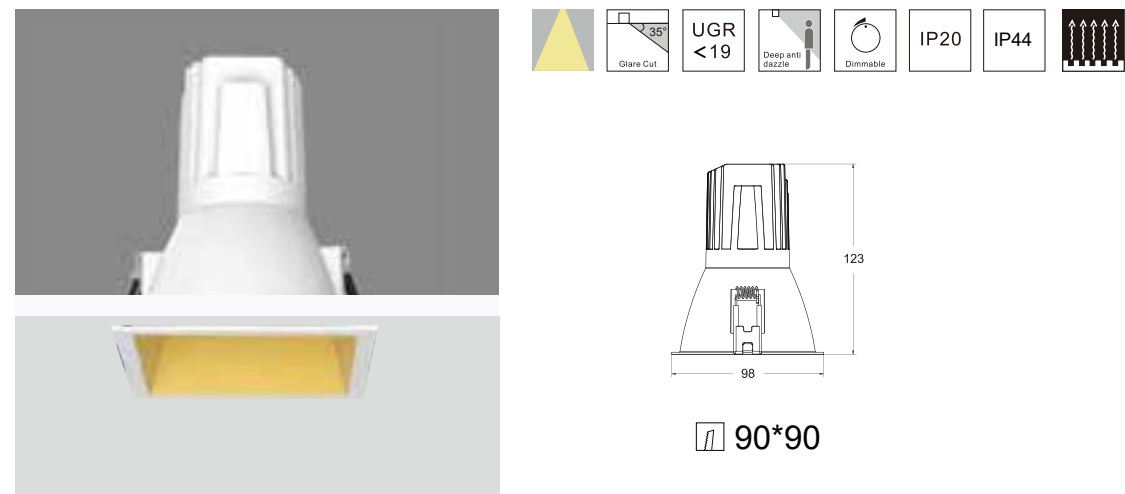

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 K-CL37-3515F-S2G	15W	34V	350mA	90	2700K	28°	1314lm	1068lm	ON-OFF TRIAC 1-10V DALI
						38°	1314lm	1038lm	
						55°	1314lm	1017lm	
	15W	34V	350mA	90	3000K	28°	1383lm	1125lm	ON-OFF TRIAC 1-10V DALI
						38°	1383lm	1093lm	
						55°	1383lm	1071lm	
	15W	34V	350mA	90	4000K	28°	1467lm	1193lm	ON-OFF TRIAC 1-10V DALI
						38°	1467lm	1159lm	
						55°	1467lm	1136lm	

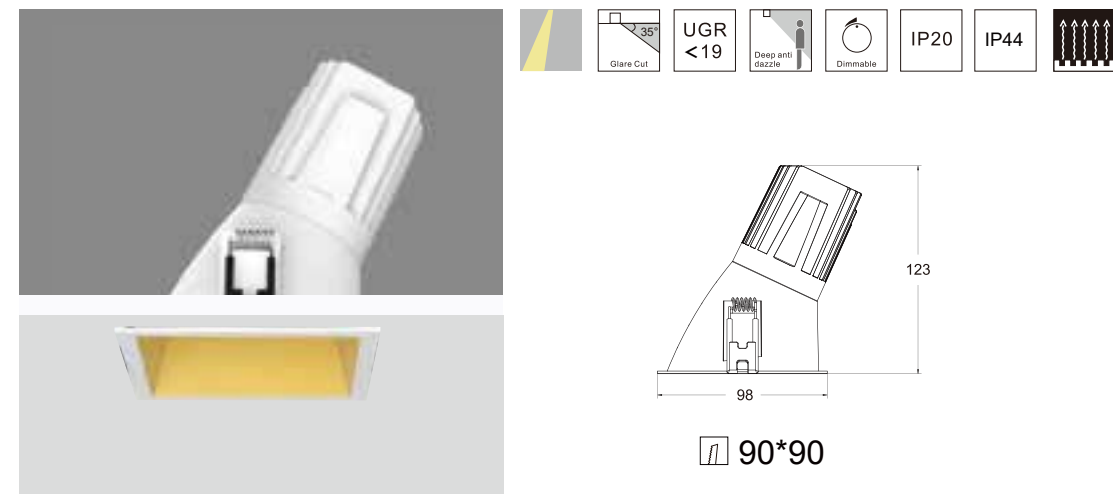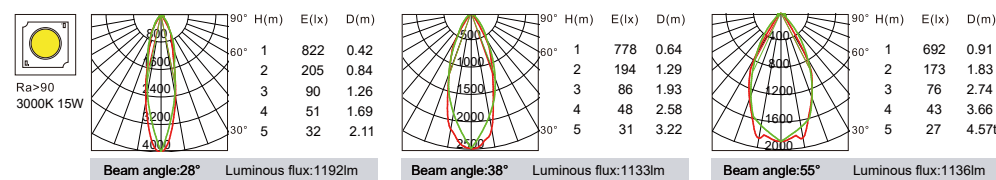

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 K-CL37-3515W-S2G	15W	34V	350mA	90	2700K	28°	1314lm	1068lm	ON-OFF TRIAC 1-10V DALI
						38°	1314lm	1038lm	
						55°	1314lm	1017lm	
	15W	34V	350mA	90	3000K	28°	1383lm	1125lm	ON-OFF TRIAC 1-10V DALI
						38°	1383lm	1093lm	
						55°	1383lm	1071lm	
	15W	34V	350mA	90	4000K	28°	1467lm	1193lm	ON-OFF TRIAC 1-10V DALI
						38°	1467lm	1159lm	
						55°	1467lm	1136lm	

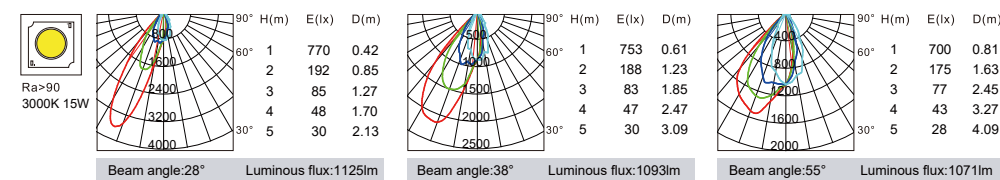

Star C4 Series



Star C4 Series




2700K/3000K/4000K,Ra>90

-Precise distribution and even transition.Less scattering makes vision more comfortable.




K-C4-2T-R2D

Power:5W/7W
Cutout:55mm
Height:72mm




K-C4-3T-R2D

Power:8W/10W
Cutout:75mm
Height:86mm








K-C4-4T-R2D



Power:15W/20W
Cutout:95mm
Height:115mm





CL37 series

Model	K-C4-2T-R2D	K-C4-3T-R2D	K-C4-4T-R2D		K-C4-2T-R3D	K-C4-3T-R3D
Product Photo						
Dimension(mm)						
Cutout(mm)	55	75	95		55	75
Wattage	5W/7W	8W/10W	15W/20W		5W/7W	8W/10W
CCT	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K		2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K
CRI	>90	>90	>90		>90	>90
Beam Angle	18° /24° /36° /50°	18° /24° /36° /50°	18° /24° /36° /50°		18° /24° /36° /50°	18° /24° /36° /50°
Lumen	312-510LM	531-941LM	921-1875LM		312-510LM	562-932LM
IP	IP20	IP20	IP20		IP20	IP20
Dimming	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI		TRIAC/1-10V/DALI	TRIAC/1-10V/DALI
Reflector Colour	Highly specular aluminium UV processed black cup	Highly specular aluminium UV processed black cup	Highly specular aluminium UV processed black cup		Highly specular aluminium UV processed black cup	Highly specular aluminium UV processed black cup
Colour	White+Iron gray	White+Iron gray	White+Iron gray		White+Iron gray	White+Iron gray


CL37 series

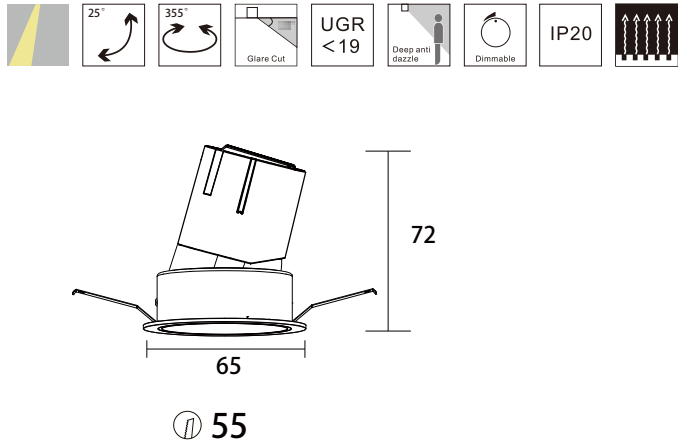


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
K-C4-205T-R2D	5W	33V	120mA	90	2700K	18° 24° 36°	423lm 423lm 423lm	312lm 377lm 390lm	ON-OFF TRIAC 1-10V DALI
	5W	33V	120mA	90	3000K	18° 24° 36°	446lm 446lm 446lm	329lm 395lm 412lm	ON-OFF TRIAC 1-10V DALI
	5W	33V	120mA	90	4000K	18° 24° 36°	470lm 470lm 470lm	346lm 416lm 434lm	ON-OFF TRIAC 1-10V DALI
K-C4-207T-R2D	7W	33V	150mA	90	2700K	18° 24° 36°	586lm 586lm 586lm	365lm 442lm 458lm	ON-OFF TRIAC 1-10V DALI
	7W	33V	150mA	90	3000K	18° 24° 36°	620lm 620lm 620lm	387lm 468lm 485lm	ON-OFF TRIAC 1-10V DALI
	7W	33tV	150mA	90	4000K	18° 24° 36°	652lm 652lm 652lm	406lm 492lm 510lm	ON-OFF TRIAC 1-10V DALI

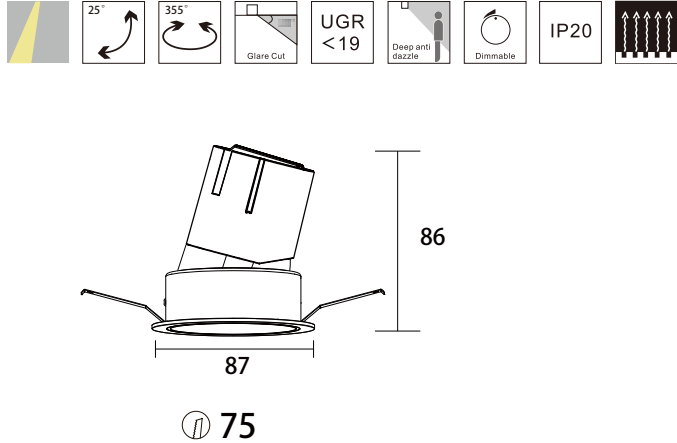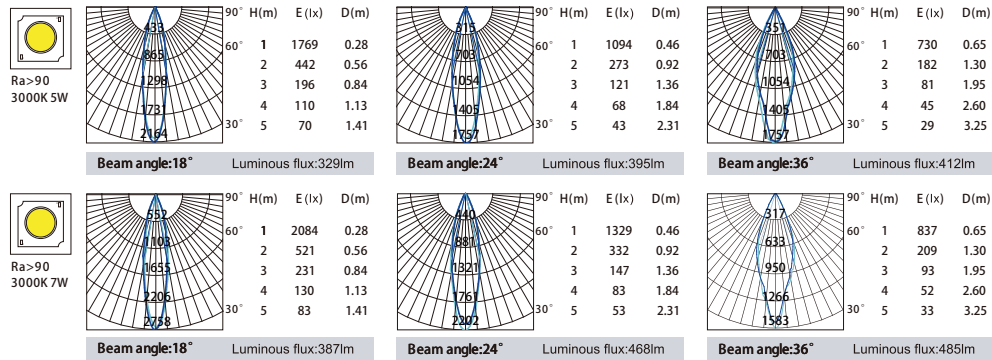



Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
K-C4-308T-R2D	8W	34V	200mA	90	2700K	18° 24° 36° 50°	773lm 773lm 773lm 773lm	562lm 718lm 705lm 531lm	ON-OFF TRIAC 1-10V DALI
	8W	34V	200mA	90	3000K	18° 24° 36° 50°	812lm 812lm 812lm 812lm	591lm 755lm 741lm 558lm	ON-OFF TRIAC 1-10V DALI
	8W	34V	200mA	90	4000K	18° 24° 36° 50°	862lm 862lm 862lm 862lm	627lm 801lm 786lm 592lm	ON-OFF TRIAC 1-10V DALI
K-C4-310T-R2D	10W	34V	250mA	90	2700K	18° 24° 36° 50°	965lm 965lm 965lm 965lm	664lm 843lm 835lm 630lm	ON-OFF TRIAC 1-10V DALI
	10W	34V	250mA	90	3000K	18° 24° 36° 50°	1015lm 1015lm 1015lm 1015lm	699lm 887lm 879lm 663lm	ON-OFF TRIAC 1-10V DALI
	10W	34V	250mA	90	4000K	18° 24° 36° 50°	1077lm 1077lm 1077lm 1077lm	741lm 941lm 932lm 703lm	ON-OFF TRIAC 1-10V DALI

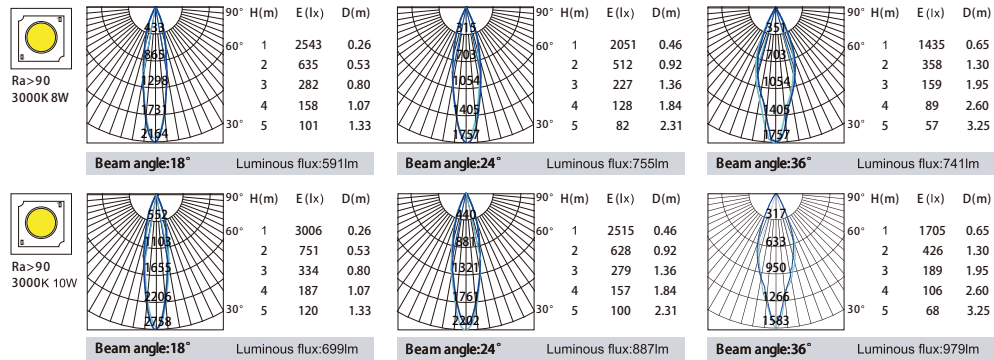


CL37 series

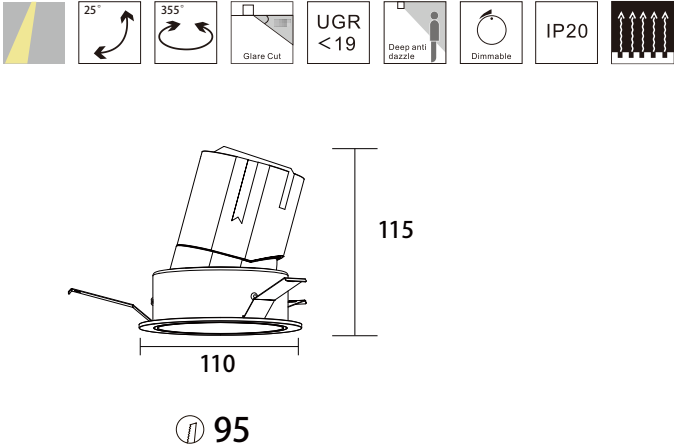


	Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	K-C4-415T-R2D	15W	34V	350mA	90	2700K	18°	1314lm	921lm	ON-OFF
							24°	1314lm	1179lm	TRIAC
							36°	1314lm	1214lm	1-10V
	K-C4-415T-R2D	15W	34V	350mA	90	3000K	18°	1383lm	970lm	ON-OFF
							24°	1383lm	1241lm	TRIAC
							36°	1383lm	1278lm	1-10V
	K-C4-415T-R2D	15W	34V	350mA	90	4000K	18°	1467lm	1028lm	ON-OFF
							24°	1467lm	1316lm	TRIAC
							36°	1467lm	1355lm	1-10V
	K-C4-420T-R2D	20W	34V	500mA	90	2700K	18°	1877lm	1278lm	ON-OFF
							24°	1877lm	1619lm	TRIAC
							36°	1877lm	1680lm	1-10V
	K-C4-420T-R2D	20W	34V	500mA	90	3000K	18°	1975lm	1345lm	ON-OFF
							24°	1975lm	1704lm	TRIAC
							36°	1975lm	1768lm	1-10V
	K-C4-420T-R2D	20W	34V	500mA	90	4000K	18°	2095lm	1426lm	ON-OFF
							24°	2095lm	1807lm	TRIAC
							36°	2095lm	1875lm	1-10V
	K-C4-420T-R2D	20W	34V	500mA	90	4000K	18°	2095lm	1782lm	ON-OFF
							24°	2095lm	1807lm	TRIAC
							36°	2095lm	1875lm	1-10V

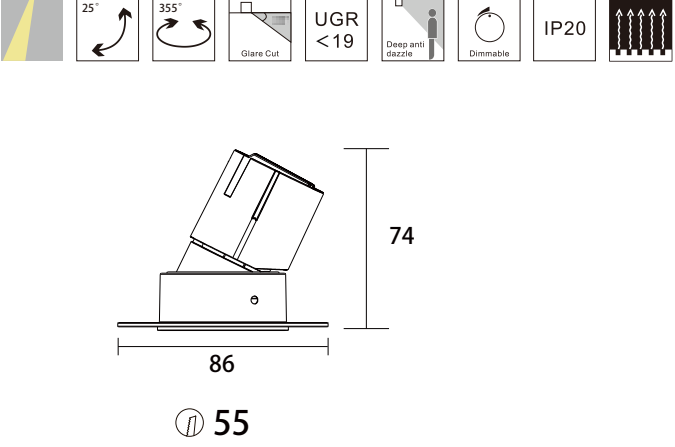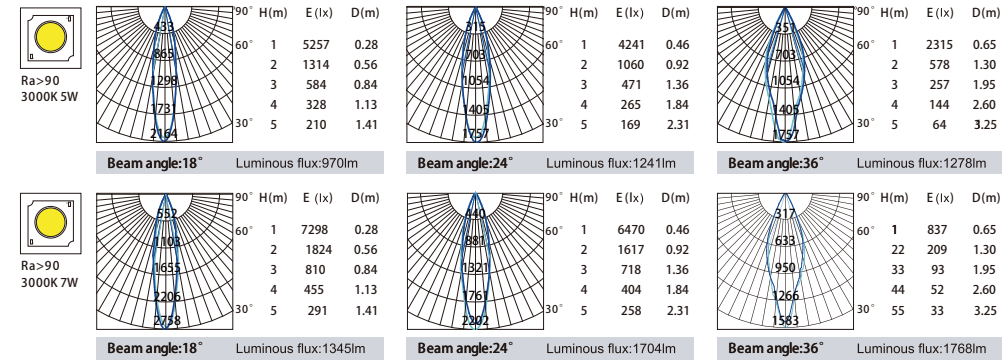


	Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	K-C4-205T-R3D	5W	33V	120mA	90	2700K	18°	423lm	312lm	ON-OFF
							24°	423lm	377lm	TRIAC
							36°	423lm	390lm	1-10V
	K-C4-205T-R3D	5W	33V	120mA	90	3000K	18°	446lm	329lm	ON-OFF
							24°	446lm	395lm	TRIAC
							36°	446lm	412lm	1-10V
	K-C4-205T-R3D	5W	33V	120mA	90	4000K	18°	470lm	346lm	ON-OFF
							24°	470lm	416lm	TRIAC
							36°	470lm	434lm	1-10V
	K-C4-207T-R3D	7W	33V	150mA	90	2700K	18°	586lm	365lm	ON-OFF
							24°	586lm	442lm	TRIAC
							36°	586lm	458lm	1-10V
	K-C4-207T-R3D	7W	33V	150mA	90	3000K	18°	620lm	387lm	ON-OFF
							24°	620lm	468lm	TRIAC
							36°	620lm	485lm	1-10V
	K-C4-207T-R3D	7W	33tV	150mA	90	4000K	18°	652lm	406lm	ON-OFF
							24°	652lm	492lm	TRIAC
							36°	652lm	510lm	1-10V

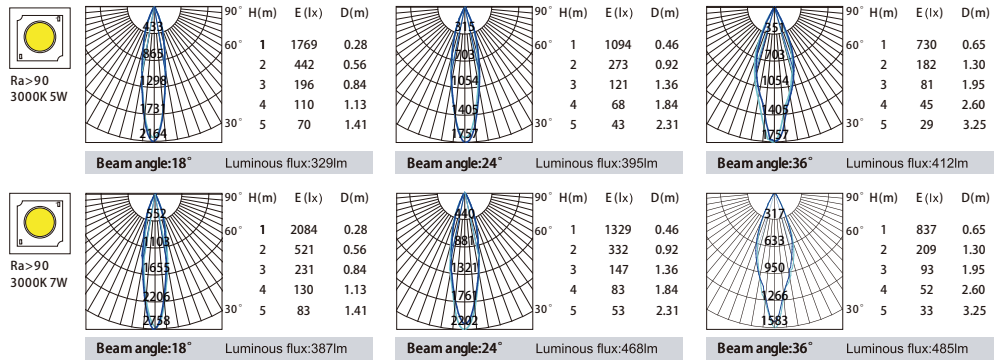

CL37 series

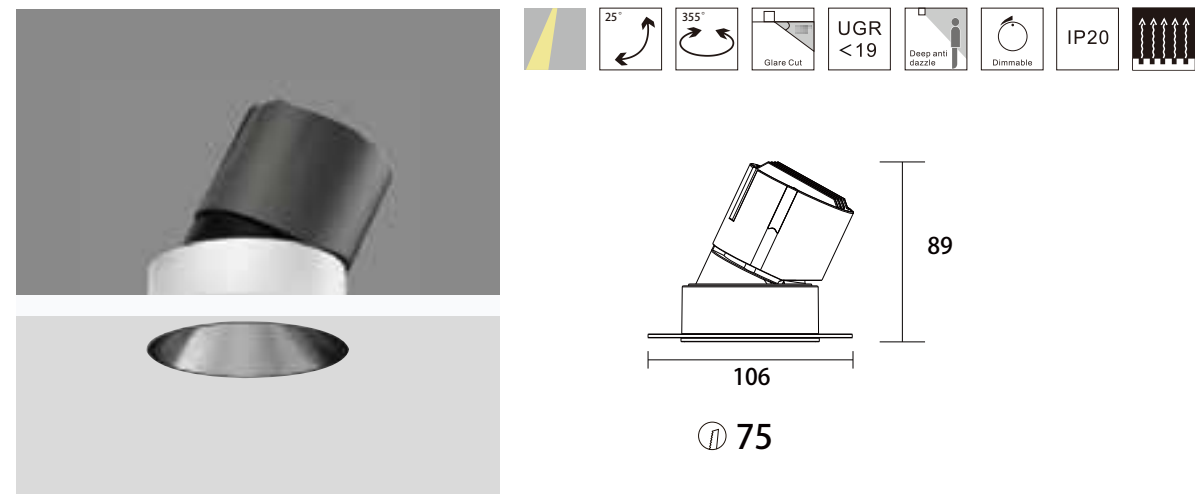

	Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	K-C4-308T-R3D	8W	34V	200mA	90	2700K	18°	773lm	562lm	ON-OFF
							24°	773lm	718lm	TRIAC
							36°	773lm	705lm	1-10V
							50°	773lm	531lm	DALI
		8W	34V	200mA	90	3000K	18°	812lm	591lm	ON-OFF
							24°	812lm	755lm	TRIAC
							36°	812lm	741lm	1-10V
							50°	812lm	558lm	DALI
		8W	34V	200mA	90	4000K	18°	862lm	627lm	ON-OFF
							24°	862lm	801lm	TRIAC
							36°	862lm	786lm	1-10V
							50°	862lm	592lm	DALI
	K-C4-310T-R3D	10W	34V	250mA	90	2700K	18°	965lm	664lm	ON-OFF
							24°	965lm	843lm	TRIAC
							36°	965lm	835lm	1-10V
							50°	965lm	630lm	DALI
		10W	34V	250mA	90	3000K	18°	1015lm	699lm	ON-OFF
							24°	1015lm	887lm	TRIAC
							36°	1015lm	879lm	1-10V
							50°	1015lm	663lm	DALI
		10W	34V	250mA	90	4000K	18°	1077lm	741lm	ON-OFF
							24°	1077lm	941lm	TRIAC
							36°	1077lm	932lm	1-10V
							50°	1077lm	703lm	DALI

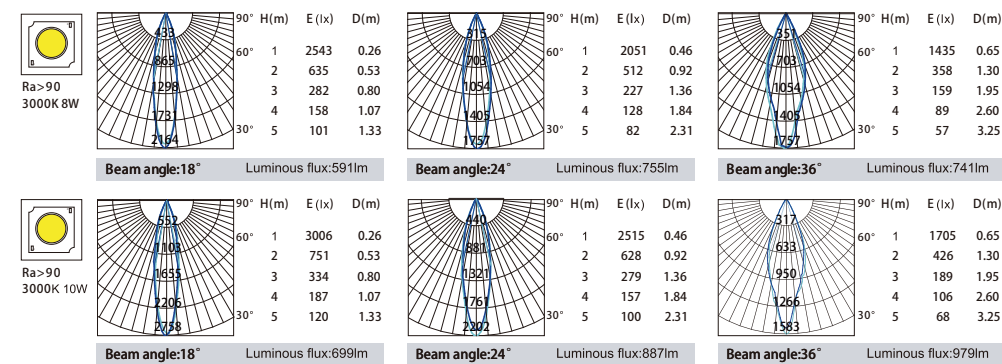

CL37 series

Model	K-C4-3T-S2D	K-C4-3T-S3D	K-C4-4T-S2D	K-C4-4T-S3D		K-C4-3T-S2D	K-C4-3T-S3D	K-C4-4T-S2D	K-C4-4T-S3D
Product Photo									
Dimension(mm)									
Cutout(mm)	75	75	75	75		75	75	75	75
Wattage	8W/10W	8W/10W	8W/10W	8W/10W		2*8W/2*10W	2*8W/2*10W	2*8W/2*10W	2*8W/2*10W
CCT	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K		2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K
CRI	>90	>90	>90	>90		>90	>90	>90	>90
Beam Angle	15°/24°/36°/50°	15°/24°/36°/50°	15°/24°/36°/50°	15°/24°/36°/50°		15°/24°/36°/50°	15°/24°/36°/50°	15°/24°/36°/50°	15°/24°/36°/50°
Lumen	562lm-703lm	562lm-703lm	921lm-1890lm	921lm-1890lm		1124lm-1406lm	1124lm-1406lm	1842lm-3780lm	1842lm-3780lm
IP	IP20	IP20	IP20	IP20		IP20	IP20	IP20	IP20
Dimming	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI		TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI
Reflector Colour	Highly specular aluminium UV processed black cup	Highly specular aluminium UV processed black cup	Highly specular aluminium UV processed black cup	Highly specular aluminium UV processed black cup		Highly specular aluminium UV processed black cup	Highly specular aluminium UV processed black cup	Highly specular aluminium UV processed black cup	Highly specular aluminium UV processed black cup
Colour	black/White	black/White	black/White	black/White		black/White	black/White	black/White	black/White

Reflecting Accessories

White



Red

Gold



Matt Silver

Black


CL37 series

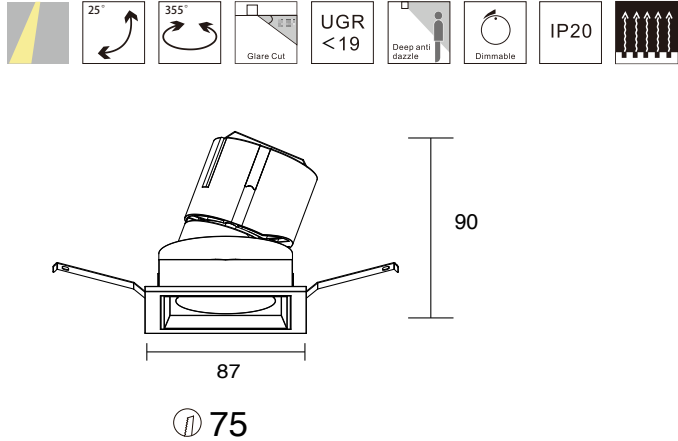



	Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	K-C4-308T-S2D	8W	36V	200mA	90	2700K	15°	773	562	ON-OFF
							24°	773	718	TRIAC
							36°	773	705	1-10V
							50°	773	531	DALI
		8W	36V	200mA	90	3000K	15°	812	591	ON-OFF
							24°	812	755	TRIAC
							36°	812	741	1-10V
							50°	812	558	DALI
		8W	36V	200mA	90	4000K	15°	862	627	ON-OFF
							24°	862	801	TRIAC
							36°	862	676	1-10V
							50°	862	592	DALI
	K-C4-312T-S2D	10W	36V	250mA	90	2700K	15°	965	664	ON-OFF
							24°	965	843	TRIAC
							36°	965	835	1-10V
							50°	965	630	DALI
		10W	36V	250mA	90	3000K	15°	1015	699	ON-OFF
							24°	1015	887	TRIAC
							36°	1015	879	1-10V
							50°	1015	663	DALI
		10W	36V	250mA	90	4000K	15°	1077	741	ON-OFF
							24°	1077	941	TRIAC
							36°	1077	932	1-10V
							50°	1077	703	DALI

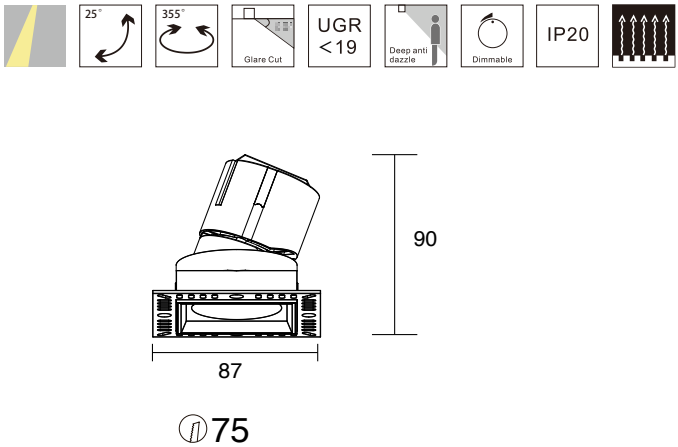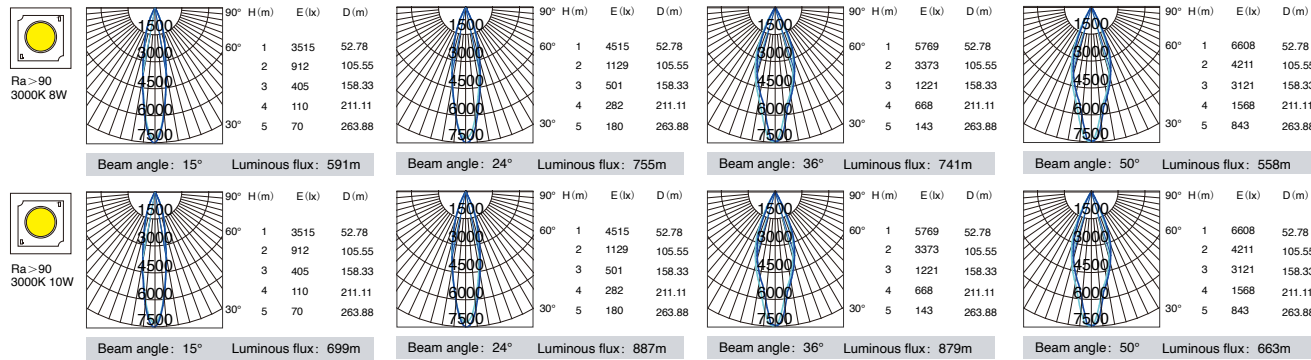



	Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	K-C4-308T-S3D	8W	36V	200mA	90	2700K	15°	773	562	ON-OFF
							24°	773	718	TRIAC
							36°	773	705	1-10V
							50°	773	531	DALI
		8W	36V	200mA	90	3000K	15°	812	591	ON-OFF
							24°	812	755	TRIAC
							36°	812	741	1-10V
							50°	812	558	DALI
		8W	36V	200mA	90	4000K	15°	862	627	ON-OFF
							24°	862	801	TRIAC
							36°	862	676	1-10V
							50°	862	592	DALI
	K-C4-312T-S3D	10W	36V	250mA	90	2700K	15°	965	664	ON-OFF
							24°	965	843	TRIAC
							36°	965	835	1-10V
							50°	965	630	DALI
		10W	36V	250mA	90	3000K	15°	1015	699	ON-OFF
							24°	1015	887	TRIAC
							36°	1015	879	1-10V
							50°	1015	663	DALI
		10W	36V	250mA	90	4000K	15°	1077	741	ON-OFF
							24°	1077	941	TRIAC
							36°	1077	932	1-10V
							50°	1077	703	DALI

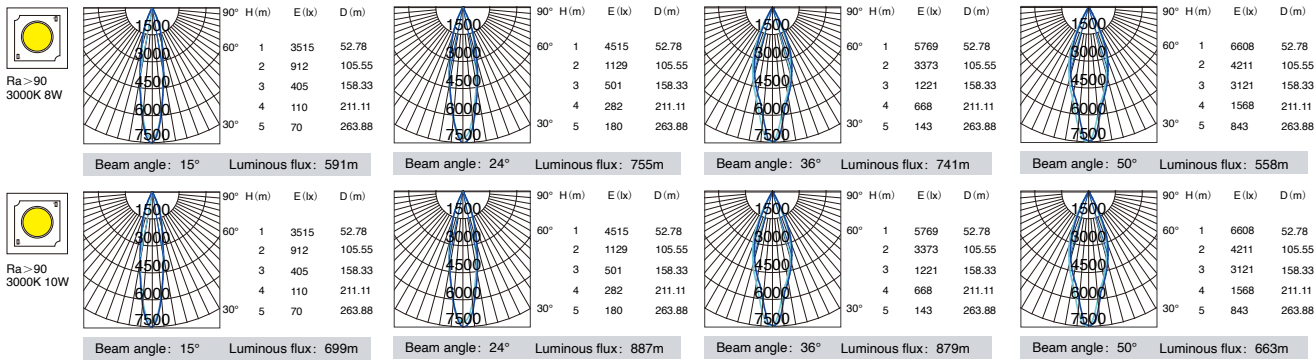


CL37 series

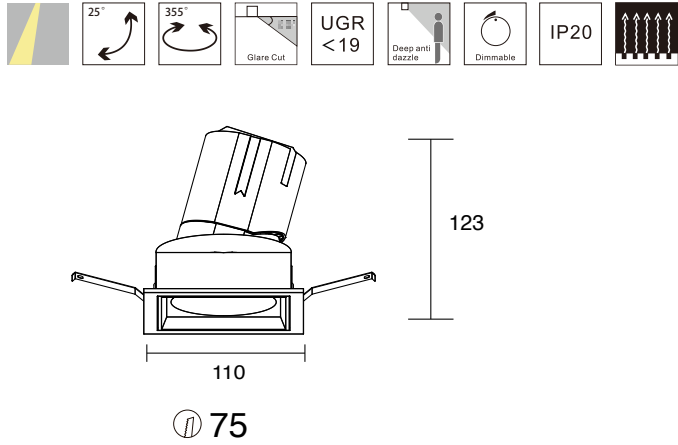



	Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	K-C4-415T-S2D	15W	36V	350mA	90	2700K	15°	1314	921	ON-OFF
							24°	1314	1179	TRIAC
							36°	1314	1214	1-10V
							50°	1314	1248	DALI
		15W	36V	350mA	90	3000K	15°	1383	970	ON-OFF
							24°	1383	1241	TRIAC
							36°	1383	1278	1-10V
							50°	1383	1314	DALI
		15W	36V	350mA	90	4000K	15°	1467	1028	ON-OFF
							24°	1467	1316	TRIAC
							36°	1467	1355	1-10V
							50°	1467	1393	DALI
	K-C4-420T-S2D	20W	36V	500mA	90	2700K	15°	1877	1277	ON-OFF
							24°	1877	1619	TRIAC
							36°	1877	1681	1-10V
							50°	1877	1786	DALI
		20W	36V	500mA	90	3000K	15°	1975	1344	ON-OFF
							24°	1975	1704	TRIAC
							36°	1975	1769	1-10V
							50°	1975	1880	DALI
		20W	36V	500mA	90	4000K	15°	2095	1425	ON-OFF
							24°	2095	1807	TRIAC
							36°	2095	1876	1-10V
							50°	2095	1890	DALI

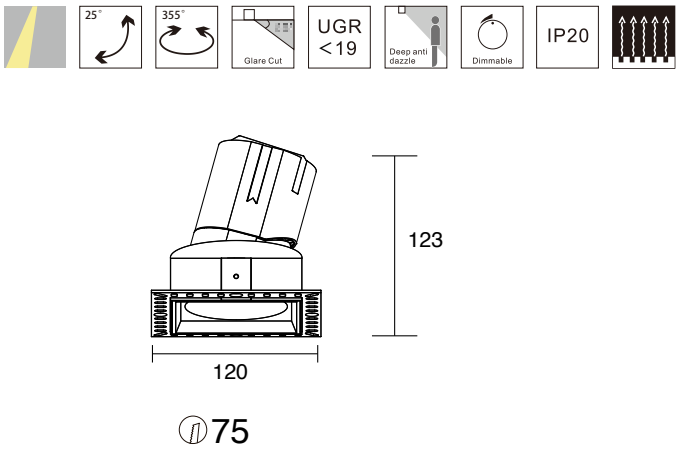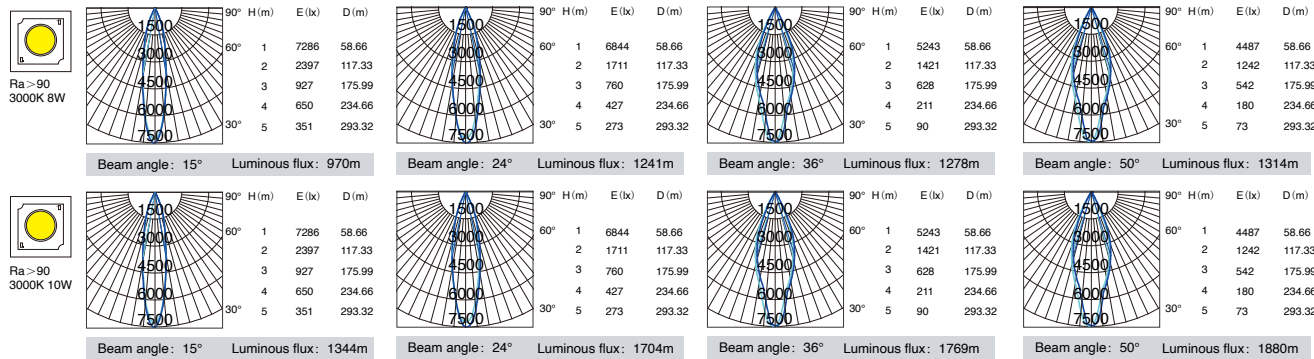



	Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	K-C4-415T-S3D	15W	36V	350mA	90	2700K	15°	1314	921	ON-OFF
							24°	1314	1179	TRIAC
							36°	1314	1214	1-10V
							50°	1314	1248	DALI
	15W	36V	350mA	90	3000K	15°	1383	970	ON-OFF	
						24°	1383	1241	TRIAC	
						36°	1383	1278	1-10V	
						50°	1383	1314	DALI	
	15W	36V	350mA	90	4000K	15°	1467	1028	ON-OFF	
						24°	1467	1316	TRIAC	
						36°	1467	1355	1-10V	
						50°	1467	1393	DALI	
	K-C4-420T-S3D	20W	36V	500mA	90	2700K	15°	1877	1277	ON-OFF
							24°	1877	1619	TRIAC
							36°	1877	1681	1-10V
							50°	1877	1786	DALI
	20W	36V	500mA	90	3000K	15°	1975	1344	ON-OFF	
						24°	1975	1704	TRIAC	
						36°	1975	1769	1-10V	
						50°	1975	1880	DALI	
	20W	36V	500mA	90	4000K	15°	2095	1425	ON-OFF	
						24°	2095	1807	TRIAC	
						36°	2095	1876	1-10V	
						50°	2095	1890	DALI	

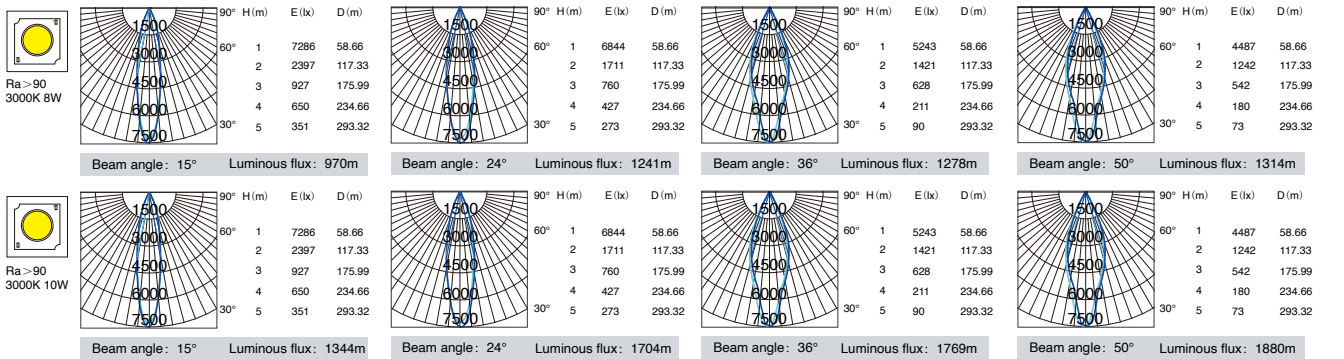


CL37 series

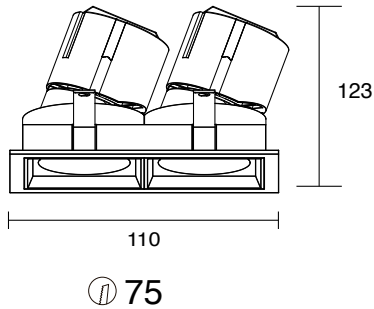



Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
K-C4-316T-S2D	2*8W	33V	120mA	90	2700K	15°	773	1124	ON-OFF
						24°	773	1436	TRIAC
						36°	773	1410	1-10V
						50°	773	1062	DALI
	2*8W	33V	120mA	90	3000K	15°	812	1182	ON-OFF
						24°	812	1510	TRIAC
						36°	812	1482	1-10V
						50°	812	1112	DALI
	2*8W	33V	120mA	90	4000K	15°	862	1254	ON-OFF
						24°	862	1602	TRIAC
						36°	862	1352	1-10V
						50°	862	1184	DALI
K-C4-320T-S2D	2*10W	33V	150mA	90	2700K	15°	965	1328	ON-OFF
						24°	965	1686	TRIAC
						36°	965	1670	1-10V
						50°	965	1260	DALI
	2*10W	33V	150mA	90	3000K	15°	1015	1398	ON-OFF
						24°	1015	1774	TRIAC
						36°	1015	1758	1-10V
						50°	1015	1326	DALI
	2*10W	33V	150mA	90	4000K	15°	1077	1482	ON-OFF
						24°	1077	1882	TRIAC
						36°	1077	1864	1-10V
						50°	1077	1406	DALI

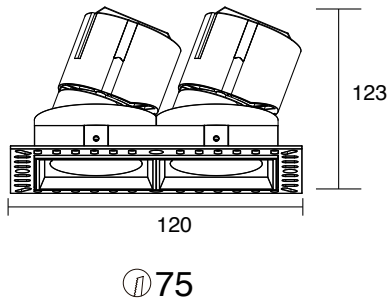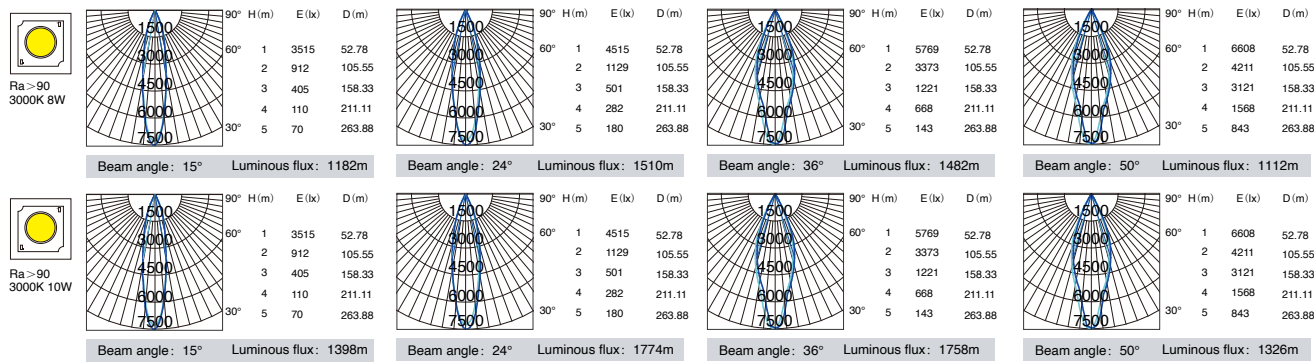



Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
K-C4-316T-S3D	2*8W	33V	120mA	90	2700K	15°	773	1124	ON-OFF
						24°	773	1436	TRIAC
						36°	773	1410	1-10V
						50°	773	1062	DALI
	2*8W	33V	120mA	90	3000K	15°	812	1182	ON-OFF
						24°	812	1510	TRIAC
						36°	812	1482	1-10V
						50°	812	1112	DALI
	2*8W	33V	120mA	90	4000K	15°	862	1254	ON-OFF
						24°	862	1602	TRIAC
						36°	862	1352	1-10V
						50°	862	1184	DALI
K-C4-320T-S3D	2*10W	33V	150mA	90	2700K	15°	965	1328	ON-OFF
						24°	965	1686	TRIAC
						36°	965	1670	1-10V
						50°	965	1260	DALI
	2*10W	33V	150mA	90	3000K	15°	1015	1398	ON-OFF
						24°	1015	1774	TRIAC
						36°	1015	1758	1-10V
						50°	1015	1326	DALI
	2*10W	33V	150mA	90	4000K	15°	1077	1482	ON-OFF
						24°	1077	1882	TRIAC
						36°	1077	1864	1-10V
						50°	1077	1406	DALI

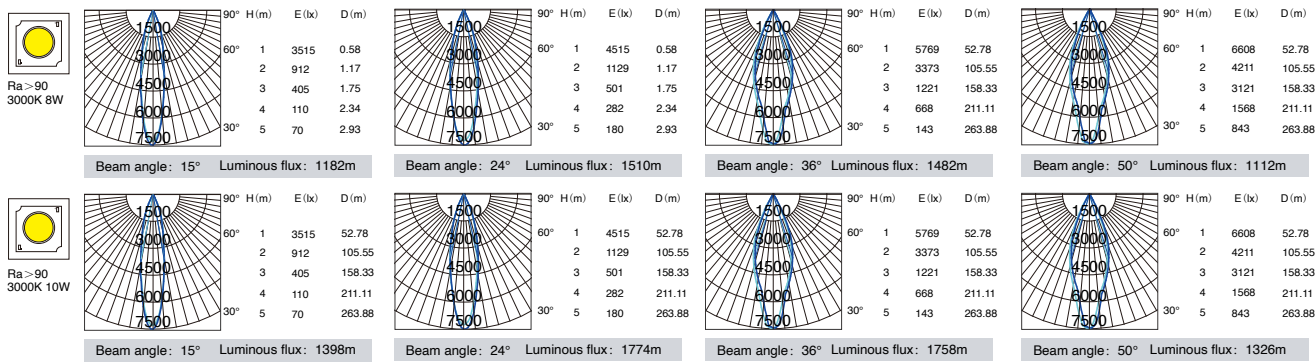


CL37 series

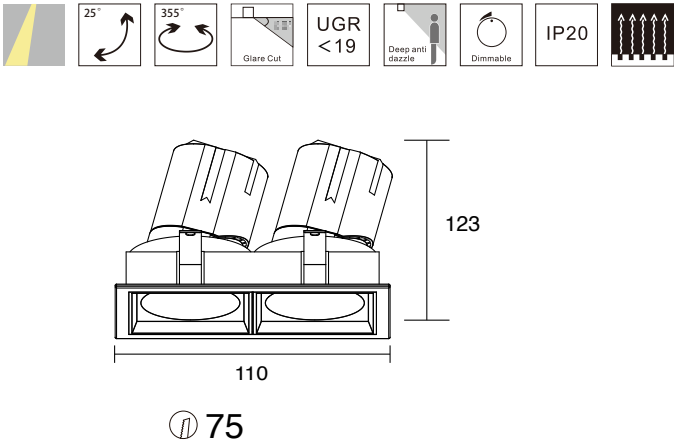

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
K-C4-430T-S2D	2*15W	33V	120mA	90	2700K	15°	1314	1842	ON-OFF
						24°	1314	2358	TRIAC
						36°	1314	2428	1-10V
						50°	1314	2496	DALI
	2*15W	33V	120mA	90	3000K	15°	1383	1940	ON-OFF
						24°	1383	2482	TRIAC
						36°	1383	2556	1-10V
						50°	1383	2628	DALI
	2*15W	33V	120mA	90	4000K	15°	1467	2056	ON-OFF
						24°	1467	2632	TRIAC
						36°	1467	2710	1-10V
						50°	1467	2786	DALI
K-C4-440T-S2D	2*20W	33V	150mA	90	2700K	15°	1877	2554	ON-OFF
						24°	1877	3362	TRIAC
						36°	1877	3362	1-10V
						50°	1877	3572	DALI
	2*20W	33V	150mA	90	3000K	15°	1975	2688	ON-OFF
						24°	1975	3408	TRIAC
						36°	1975	3538	1-10V
						50°	1975	3760	DALI
	2*20W	33V	150mA	90	4000K	15°	2095	2850	ON-OFF
						24°	2095	3614	TRIAC
						36°	2095	3752	1-10V
						50°	2095	3780	DALI

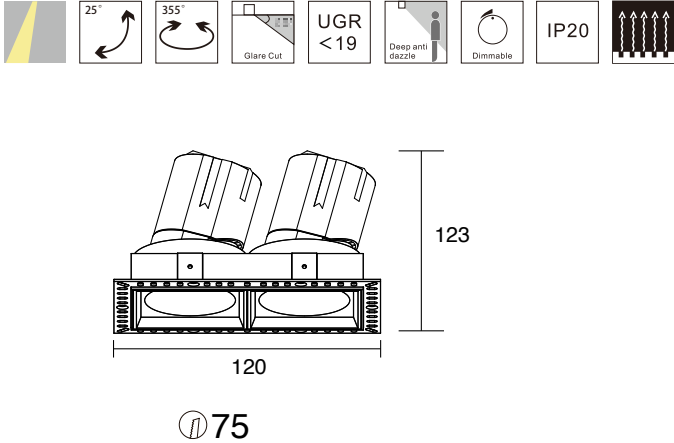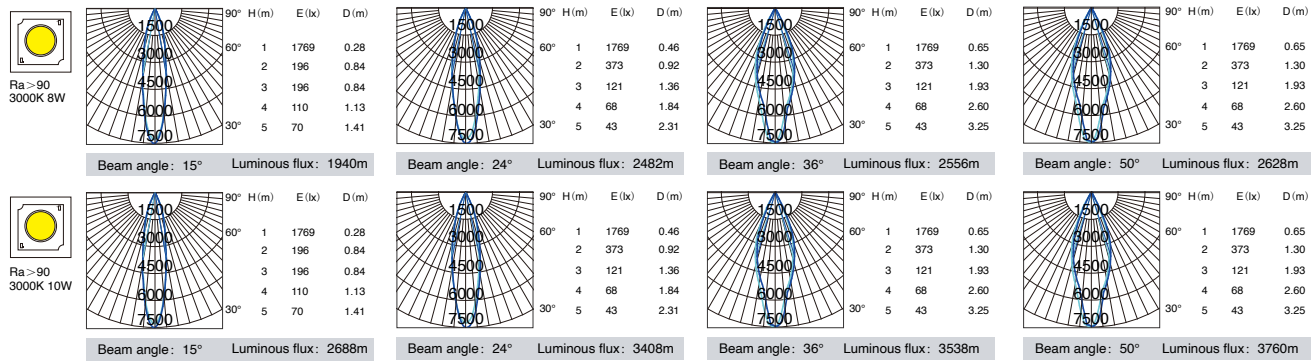

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
K-C4-430T-S3D	2*15W	33V	120mA	90	2700K	15°	1314	1842	ON-OFF
						24°	1314	2358	TRIAC
						36°	1314	2428	1-10V
						50°	1314	2496	DALI
	2*15W	33V	120mA	90	3000K	15°	1383	1940	ON-OFF
						24°	1383	2482	TRIAC
						36°	1383	2556	1-10V
						50°	1383	2628	DALI
	2*15W	33V	120mA	90	4000K	15°	1467	2056	ON-OFF
						24°	1467	2632	TRIAC
						36°	1467	2710	1-10V
						50°	1467	2786	DALI
K-C4-440T-S3D	2*20W	33V	150mA	90	2700K	15°	1877	2554	ON-OFF
						24°	1877	3362	TRIAC
						36°	1877	3362	1-10V
						50°	1877	3572	DALI
	2*20W	33V	150mA	90	3000K	15°	1975	2688	ON-OFF
						24°	1975	3408	TRIAC
						36°	1975	3538	1-10V
						50°	1975	3760	DALI
	2*20W	33V	150mA	90	4000K	15°	2095	2850	ON-OFF
						24°	2095	3614	TRIAC
						36°	2095	3752	1-10V
						50°	2095	3780	DALI

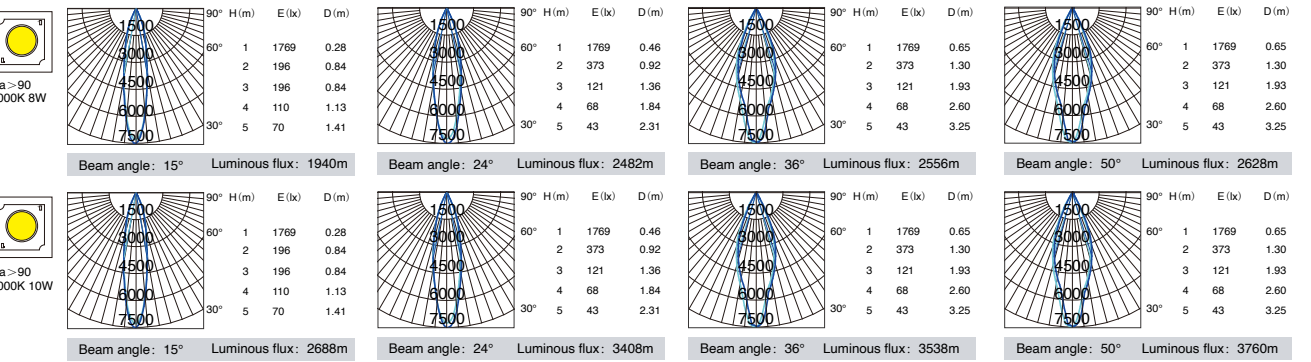



K-C4-415T-R2D
K-C4-420T-R2D



K-C4-308T-R3D
K-C4-310T-R3D
K-C4-312T-R3D



K-C4-308T-R2D
K-C4-310T-R2D
K-C4-312T-R2D



K-C4-308T-R3D
K-C4-310T-R3D
K-C4-312T-R3D



K-C4-205T-R2D
K-C4-207T-R2D

K-C4 Series New
Refine on Creating
Noble Quality

Volks C2 Series




- Outstanding color rendition effect, meet the lighting demand of upscale places. 2700K/3000K/4000K, Ra>90
- Dark light technology with chip deeply hidden, well-designed dark light reflector with UGR≤19. Comfortable and no glare.
- Die-casting aluminium heat sink, conducts the heat from the chip effectively, and ensure the lamp performance and long lifespan.
- Precise distribution and even transition. Less scattering makes vision more comfortable.




K-C2-2T-R2D

Power: 5W/7W
Cutout: 55mm
Height: 62mm




K-C2-3T-R2D

Power: 8W/10W
Cutout: 75mm
Height: 80mm







K-C2-4T-R2D

Power: 15W/20W
Cutout: 95mm
Height: 95mm



Volks C2 Series

Model	K-C2-2T-R2D	K-C2-3T-R2D	K-C2-4T-R2D
Product Photo			
Dimension(mm)			
Cutout(mm)	55	75	95
Wattage	5W/7W	8W/10W	15W/20W
CCT	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K
CRI	>90	>90	>90
Beam Angle	18°/24°/36°	18°/24°/36°	18°/24°/36°
Lumen	428-551LM	679-913LM	779-1103LM
IP	IP20	IP20	IP20
Dimming	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI
Reflector Colour	Highly specular aluminium UV processed black cup Gold	Highly specular aluminium UV processed black cup Gold	Highly specular aluminium UV processed black cup Gold
Colour	White+Iron gray	White+Iron gray	White+Iron gray




55




Honeycomb Filter Highly specular aluminium UV processed black cup Gold White



Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 K-C2-205T-R2D	5W	33V	120mA	90	2700K	18° 24° 36°	423lm 423lm 423lm	405lm 386lm 389lm	ON-OFF TRIAC 1-10V DALI
	5W	33V	120mA	90	3000K	18° 24° 36°	446lm 446lm 446lm	428lm 407lm 411lm	ON-OFF TRIAC 1-10V DALI
	5W	33V	120mA	90	4000K	18° 24° 36°	470lm 470lm 470lm	451lm 428lm 433lm	ON-OFF TRIAC 1-10V DALI
 K-C2-207T-R2D	7W	33V	150mA	90	2700K	18° 24° 36°	586lm 586lm 586lm	520lm 482lm 491lm	ON-OFF TRIAC 1-10V DALI
	7W	33V	150mA	90	3000K	18° 24° 36°	620lm 620lm 620lm	551lm 511lm 520lm	ON-OFF TRIAC 1-10V DALI
	7W	33V	150mA	90	4000K	18° 24° 36°	652lm 652lm 652lm	579lm 537lm 546lm	ON-OFF TRIAC 1-10V DALI

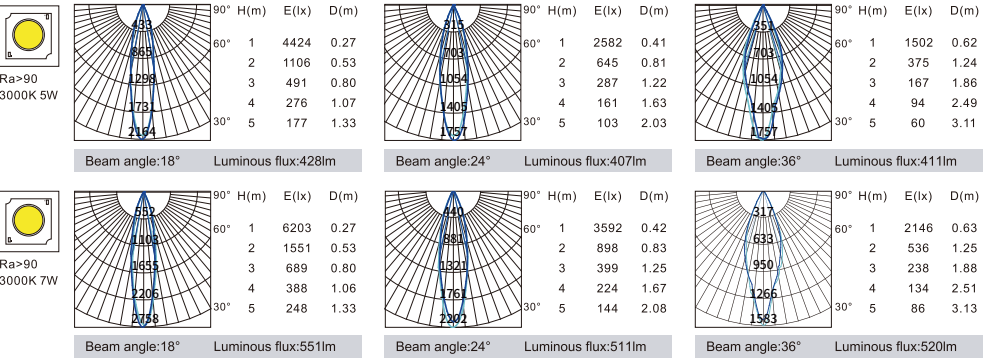


Volks C2 Series

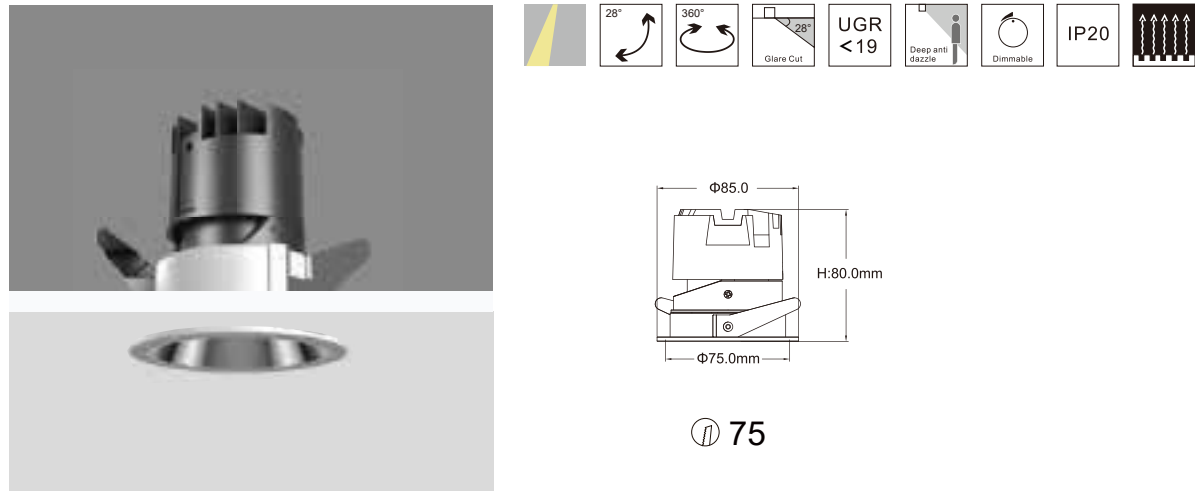

					Honecomb Filter	Highly specular aluminium	UV processed black cup	Gold	White			
Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type			
K-C2-308T-R2D	8W	34V	200mA	90	2700K	18° 24° 36°	773lm 773lm 773lm	646lm 731lm 705lm	ON-OFF TRIAC 1-10V DALI			
	8W	34V	200mA	90	3000K	18° 24° 36°	812lm 812lm 812lm	679lm 768lm 741lm	ON-OFF TRIAC 1-10V DALI			
	8W	34V	200mA	90	4000K	18° 24° 36°	862lm 862lm 862lm	720lm 815lm 786lm	ON-OFF TRIAC 1-10V DALI			
K-C2-310T-R2D	10W	34V	250mA	90	2700K	18° 24° 36°	965lm 965lm 965lm	761lm 868lm 866lm	ON-OFF TRIAC 1-10V DALI			
	10W	34V	250mA	90	3000K	18° 24° 36°	1015lm 1015lm 1015lm	801lm 913lm 911lm	ON-OFF TRIAC 1-10V DALI			
	10W	34V	250mA	90	4000K	18° 24° 36°	1077lm 1077lm 1077lm	849lm 968lm 966lm	ON-OFF TRIAC 1-10V DALI			

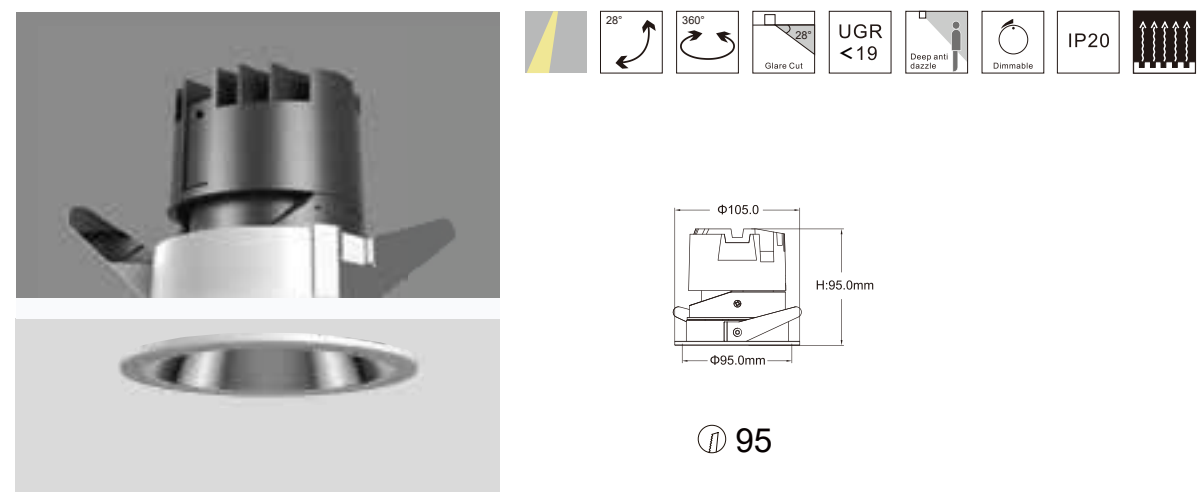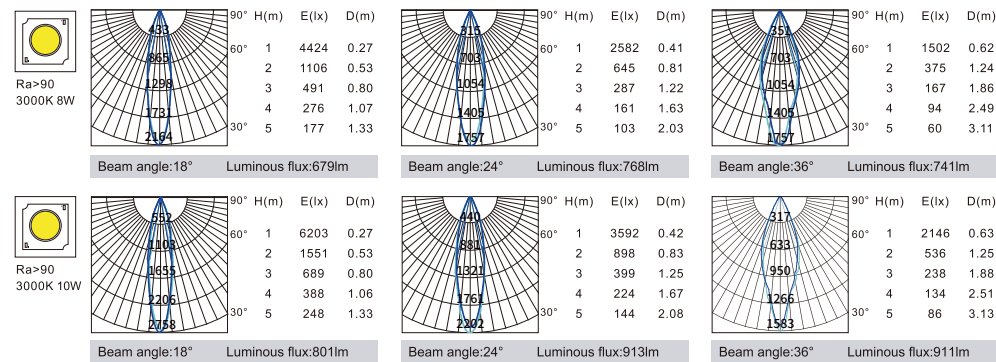


					Honecomb Filter	Highly specular aluminium	UV processed black cup	Gold	White			
Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type			
K-C2-415T-R2D	15W	34V	350mA	90	2700K	18° 24° 36°	1116lm 1116lm 1116lm	740lm 824lm 894lm	ON-OFF TRIAC 1-10V DALI			
	15W	34V	350mA	90	3000K	18° 24° 36°	1175lm 1175lm 1175lm	779lm 868lm 941lm	ON-OFF TRIAC 1-10V DALI			
	15W	34V	350mA	90	4000K	18° 24° 36°	1246lm 1246lm 1246lm	826lm 920lm 998lm	ON-OFF TRIAC 1-10V DALI			
K-C2-420T-R2D	20W	34V	500mA	90	2700K	18° 24° 36°	1220lm 1220lm 1220lm	856lm 962lm 960lm	ON-OFF TRIAC 1-10V DALI			
	20W	34V	500mA	90	3000K	18° 24° 36°	1283lm 1283lm 1283lm	901lm 1013lm 1011lm	ON-OFF TRIAC 1-10V DALI			
	20W	34V	500mA	90	4000K	18° 24° 36°	1361lm 1361lm 1361lm	955lm 1074lm 1072lm	ON-OFF TRIAC 1-10V DALI			

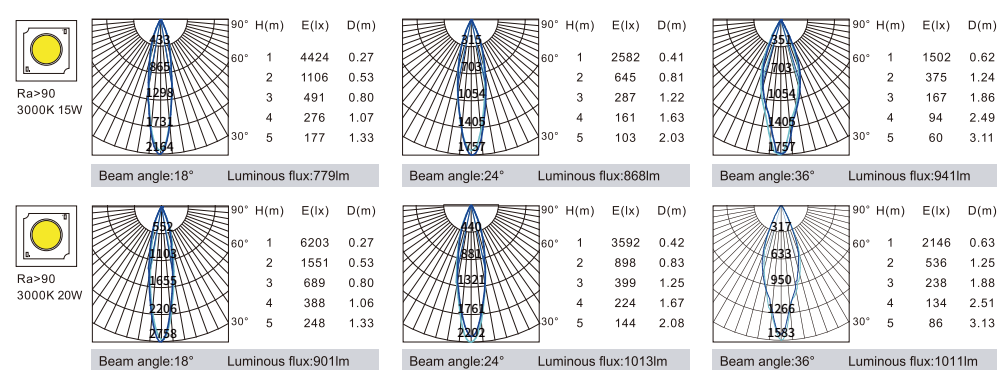


KS2-D2 Series



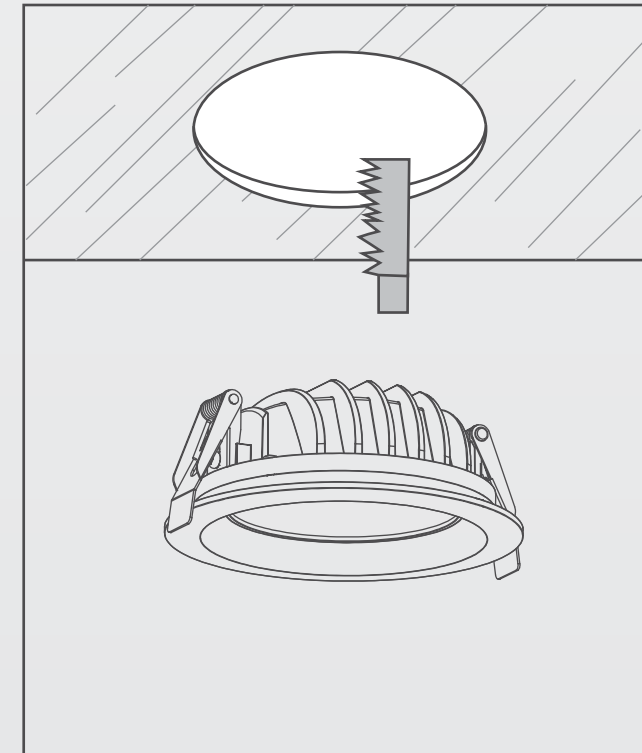


Step1

Cut holes according to the size of the holes

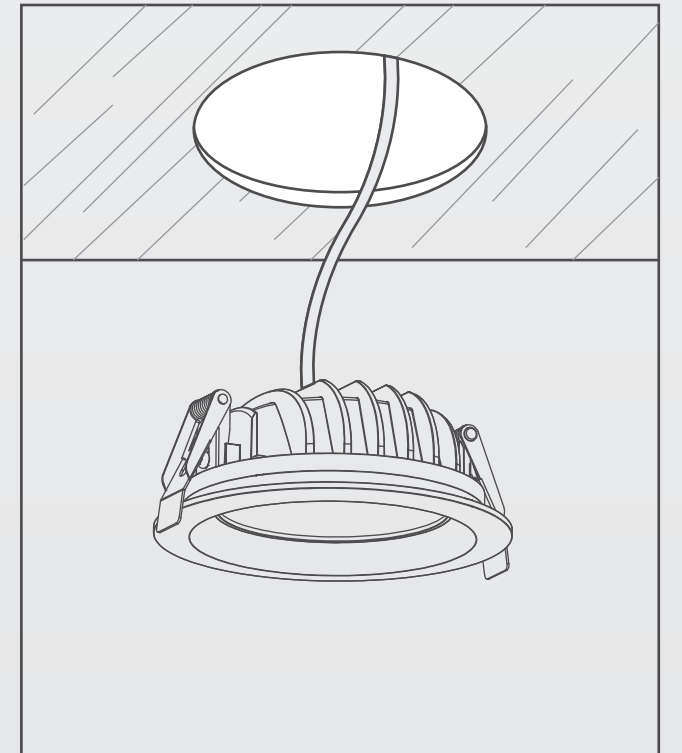


Step2

Connecting wire

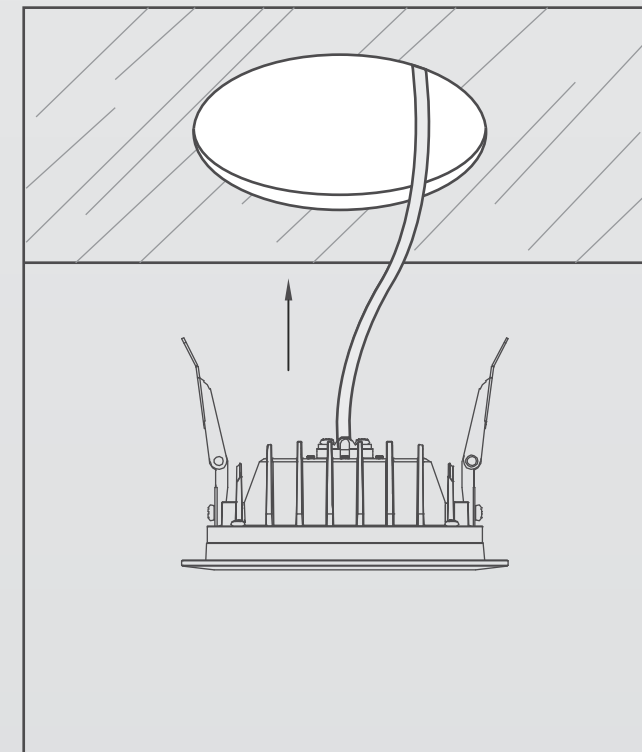

Step3


Press the spring to push the lamp body into the hole.

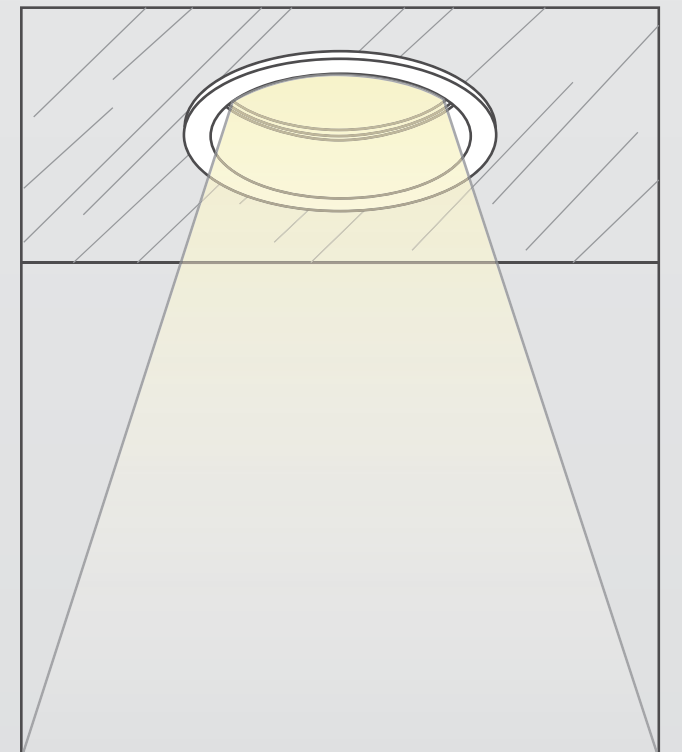

Step4


Installation completed

KS2-D2 Series

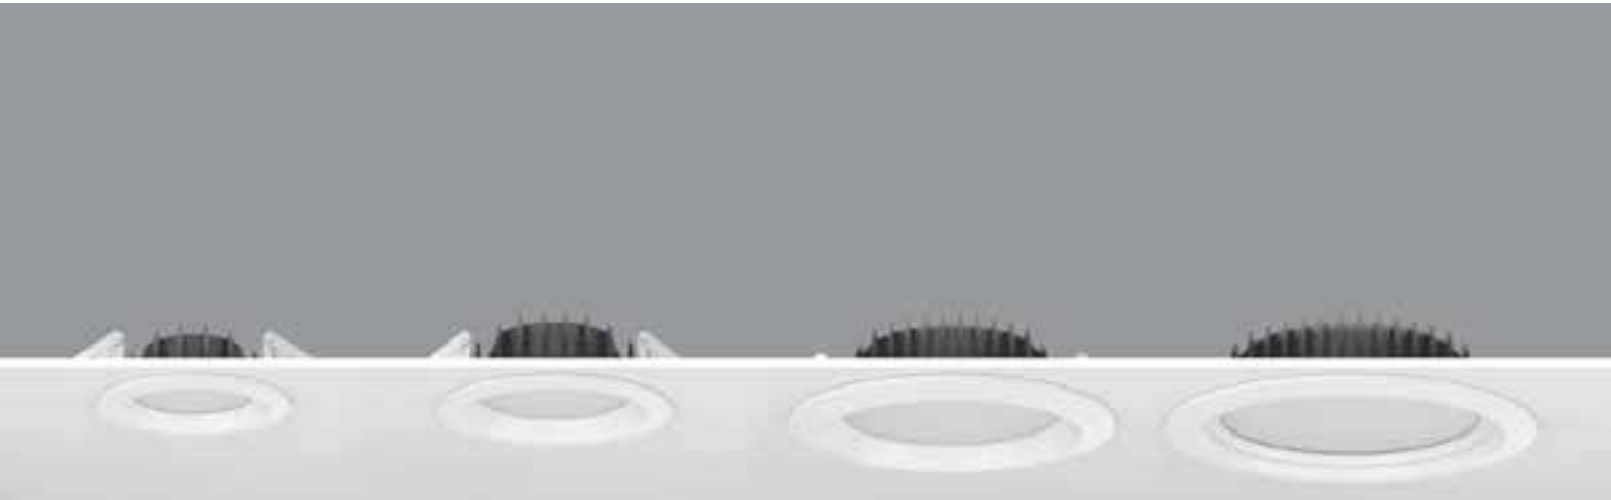


KS-D2-A-3

Power:5W/7W
Cutout:95mm
Height:45mm




KS-D2-A-4

Power:7W/9W/12W/15W
Cutout:115mm
Height:50mm




KS-D2-A-6





Power:12W/15W/20W
Cutout:165mm
Height:60mm




KS-D2-A-8

Power:20W/23W/30W
Cutout:200mm
Height:60mm




Model	KS-D2-3	KS-D2-4	KS-D2-6	KS-D2-8
Product Photo				
45 Dimension (mm)				
Cutout(mm)	95	115	165	200
Wattage	5W/7W	9W/12W/15W	12W/15W/20W	20W/25W/30W
CCT	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K
CRI	>90	>90	>90	>90
Beam Angle	110°	110°	110°	110°
Lumen	495-655lm	850-1550lm	1163-2719lm	2057-3017lm
IP	IP20	IP20	IP20	IP20
Dimming	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI
Color	White/Black	White/Black	White/Black	White/Black

KS2-D2 Series

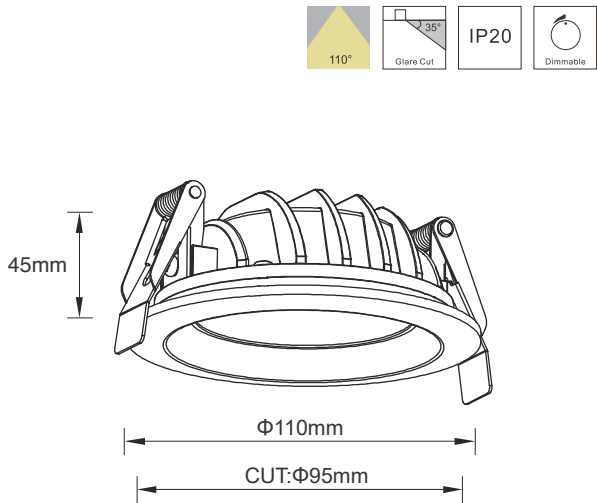


Model	Power	LED Voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System Output	Dimming Type
KS-D2-A-305	5W	36V	120mA	90	2700K	110°	518lm	498lm	ON-OFF TRIAC 1-10V DALI
	5W	36V	120mA	90	3000K	110°	562lm	542lm	TRIAC 1-10V DALI
	5W	36V	120mA	90	3500K	110°	583lm	562lm	ON-OFF TRIAC 1-10V DALI
	5W	36V	120mA	90	4000K	110°	605lm	583lm	ON-OFF TRIAC 1-10V DALI
	5W	36V	120mA	90	5000K	110°	613lm	592lm	ON-OFF TRIAC 1-10V DALI
KS-D2-A-307	7W	36V	150mA	90	2700K	110°	648lm	564lm	ON-OFF TRIAC 1-10V DALI
	7W	36V	150mA	90	3000K	110°	720lm	624lm	ON-OFF TRIAC 1-10V DALI
	7W	36V	150mA	90	3500K	110°	729lm	632lm	ON-OFF TRIAC 1-10V DALI
	7W	36V	150mA	90	4000K	110°	756lm	655lm	ON-OFF TRIAC 1-10V DALI
	7W	36V	150mA	90	5000K	110°	767lm	665lm	ON-OFF TRIAC 1-10V DALI

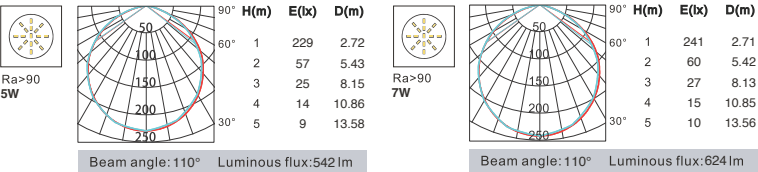




KS2-D2 Series

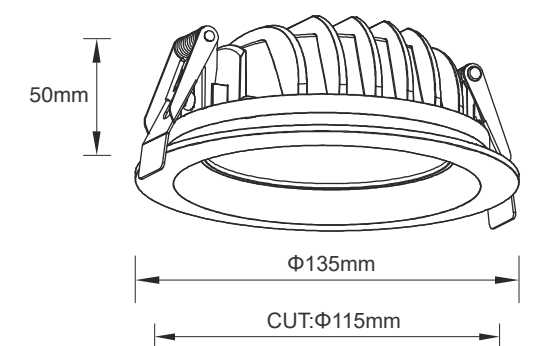


KS2-D2 Series


Model	Power	LED Voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System Output	Dimming Type
 KS-D2-A-407	7W	36V	150mA	90	2700K	110°	648lm	620lm	ON-OFF TRIAC 1-10V DALI
	7W	36V	150mA	90	3000K	110°	720lm	698lm	ON-OFF TRIAC 1-10V DALI
	7W	36V	150mA	90	3500K	110°	729lm	707lm	ON-OFF TRIAC 1-10V DALI
	7W	36V	150mA	90	4000K	110°	756lm	733lm	ON-OFF TRIAC 1-10V DALI
	7W	36V	150mA	90	5000K	110°	767lm	744lm	ON-OFF TRIAC 1-10V DALI
 KS-D2-A-409	9W	36V	200mA	90	2700K	110°	864lm	850lm	ON-OFF TRIAC 1-10V DALI
	9W	36V	200mA	90	3000K	110°	936lm	921lm	ON-OFF TRIAC 1-10V DALI
	9W	36V	200mA	90	3500K	110°	972lm	956lm	ON-OFF TRIAC 1-10V DALI
	9W	36V	200mA	90	4000K	110°	1008lm	992lm	ON-OFF TRIAC 1-10V DALI
	9W	36V	200mA	90	5000K	110°	1022lm	1006lm	ON-OFF TRIAC 1-10V DALI

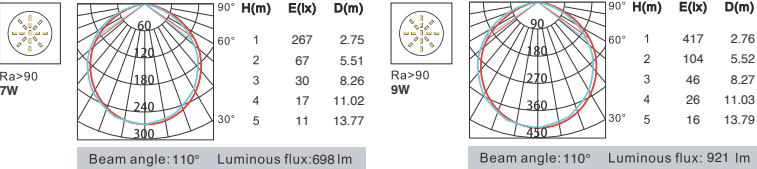


Model	Power	LED Voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System Output	Dimming Type
 KS-D2-A-412	12W	36V	300MA	90	2700K	110°	1296lm	1139lm	ON-OFF TRIAC 1-10V DALI
	12W	36V	300MA	90	3000K	110°	1404lm	1260lm	ON-OFF TRIAC 1-10V DALI
	12W	36V	300MA	90	3500K	110°	1458lm	1271lm	ON-OFF TRIAC 1-10V DALI
	12W	36V	300MA	90	4000K	110°	1512lm	1292lm	ON-OFF TRIAC 1-10V DALI
	12W	36V	300MA	90	5000K	110°	1534lm	1315lm	ON-OFF TRIAC 1-10V DALI
 KS-D2-A-415	15W	36V	350MA	90	2700K	110°	1512lm	1364lm	ON-OFF TRIAC 1-10V DALI
	15W	36V	350MA	90	3000K	110°	1638lm	1443lm	ON-OFF TRIAC 1-10V DALI
	15W	36V	350MA	90	3500K	110°	1701lm	1522lm	ON-OFF TRIAC 1-10V DALI
	15W	36V	350MA	90	4000K	110°	1764lm	1550lm	ON-OFF TRIAC 1-10V DALI
	15W	36V	350MA	90	5000K	110°	1789lm	1574lm	ON-OFF TRIAC 1-10V DALI

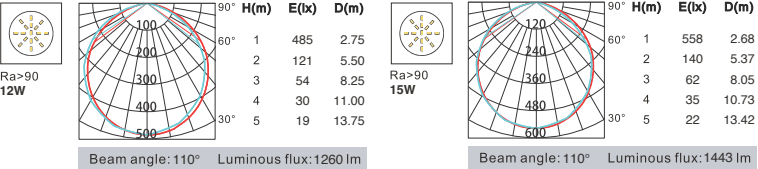

KS2-D2-A-3 Series




Model	Power	LED Voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System Output	Dimming Type
 KS-D2-A-612	12W	36V	300MA	90	2700K	110°	1296lm	1163lm	ON-OFF TRIAC 1-10V DALI
	12W	36V	300MA	90	3000K	110°	1404lm	1286lm	ON-OFF TRIAC 1-10V DALI
	12W	36V	300MA	90	3500K	110°	1458lm	1297lm	ON-OFF TRIAC 1-10V DALI
	12W	36V	300MA	90	4000K	110°	1512lm	1319lm	ON-OFF TRIAC 1-10V DALI
	12W	36V	300MA	90	5000K	110°	1534lm	1342lm	ON-OFF TRIAC 1-10V DALI

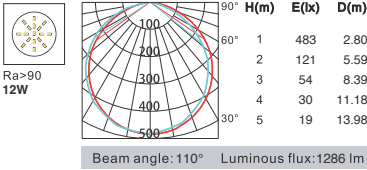


KS2-D2-A-3 Series


Model	Power	LED Voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System Output	Dimming Type
 KS-D2-A-615	15W	36V	350MA	90	2700K	110°	1512lm	1349lm	ON-OFF TRIAC 1-10V DALI
	15W	36V	350MA	90	3000K	110°	1638lm	1427lm	ON-OFF TRIAC 1-10V DALI
	15W	36V	350MA	90	3500K	110°	1701lm	1505lm	ON-OFF TRIAC 1-10V DALI
	15W	36V	350MA	90	4000K	110°	1764lm	1533lm	ON-OFF TRIAC 1-10V DALI
	15W	36V	350MA	90	5000K	110°	1789lm	1557lm	ON-OFF TRIAC 1-10V DALI
 KS-D2-A-620	20W	36V	500MA	90	2700K	110°	2160lm	1926lm	ON-OFF TRIAC 1-10V DALI
	20W	36V	500MA	90	3000K	110°	2340lm	2031lm	ON-OFF TRIAC 1-10V DALI
	20W	36V	500MA	90	3500K	110°	2430lm	2142lm	ON-OFF TRIAC 1-10V DALI
	20W	36V	500MA	90	4000K	110°	2520lm	2179lm	ON-OFF TRIAC 1-10V DALI
	20W	36V	500MA	90	5000K	110°	2556lm	2216lm	ON-OFF TRIAC 1-10V DALI

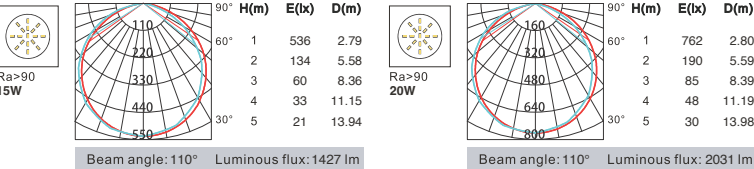


KS2-D2-A-3 Series

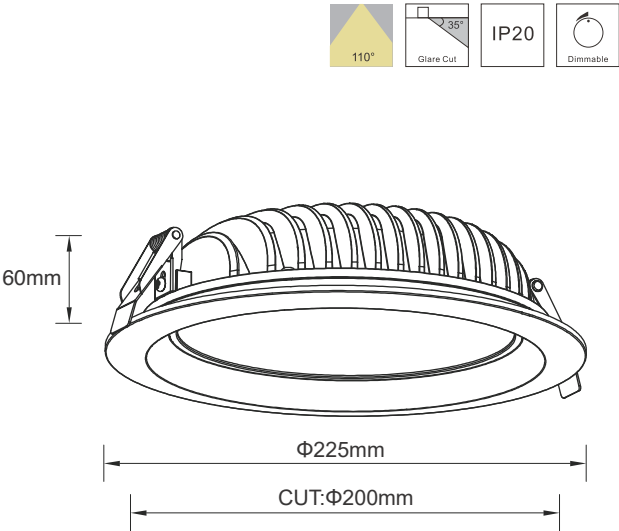

Model	Power	LED Voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System Output	Dimming Type
KS-D2-A-820	20W	36V	500MA	90	2700K	110°	2160lm	2057lm	ON-OFF TRIAC 1-10V DALI
	20W	36V	500MA	90	3000K	110°	2340lm	2169lm	ON-OFF TRIAC 1-10V DALI
	20W	36V	500MA	90	3500K	110°	2430lm	2287lm	ON-OFF TRIAC 1-10V DALI
	20W	36V	500MA	90	4000K	110°	2520lm	2327lm	ON-OFF TRIAC 1-10V DALI
	20W	36V	500MA	90	5000K	110°	2556lm	2366lm	ON-OFF TRIAC 1-10V DALI

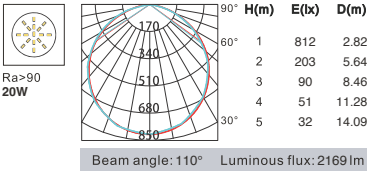

Model	Power	LED Voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System Output	Dimming Type
KS-D2-A-823	23W	36V	550MA	90	2700K	110°	2376lm	2366lm	ON-OFF TRIAC 1-10V DALI
	23W	36V	550MA	90	3000K	110°	2574lm	2564lm	ON-OFF TRIAC 1-10V DALI
	23W	36V	550MA	90	3500K	110°	2673lm	2640lm	ON-OFF TRIAC 1-10V DALI
	23W	36V	550MA	90	4000K	110°	2772lm	2685lm	ON-OFF TRIAC 1-10V DALI
	23W	36V	550MA	90	5000K	110°	2812lm	2731lm	ON-OFF TRIAC 1-10V DALI
KS-D2-A-830	30W	36V	700MA	90	2700K	110°	3024lm	2659lm	ON-OFF TRIAC 1-10V DALI
	30W	36V	700MA	90	3000K	110°	3276lm	2940lm	ON-OFF TRIAC 1-10V DALI
	30W	36V	700MA	90	3500K	110°	3402lm	2965lm	ON-OFF TRIAC 1-10V DALI
	30W	36V	700MA	90	4000K	110°	3528lm	3017lm	ON-OFF TRIAC 1-10V DALI
	30W	36V	700MA	90	5000K	110°	3578lm	3068lm	ON-OFF TRIAC 1-10V DALI

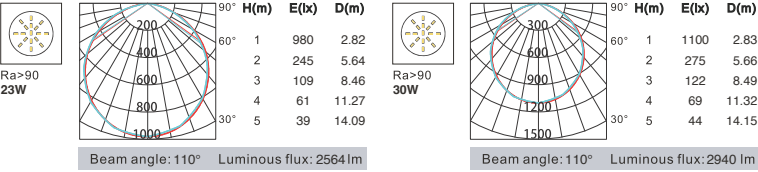




DL09 Series

- Outstanding color rendition effect, meet the lighting demand of upscale places. 2700K/3000K/4000K, Ra>90
- Dark light technology with chip deeply hidden, well-designed dark light reflector with UGR≤19. Comfortable and no glare.
- Conducts the heat from the chip effectively, and ensure the lamp performance and long lifespan.
- Precise distribution and even transition. Less scattering makes vision more comfortable.


DL09 Series




KS-DL09-A-305
Power: 5W
Cutout: 75mm
Height:55mm




KS-DL09-A3508
Power: 8W
Cutout: 90mm
Height:60mm




KS-DL09-A-412
Power: 12W
Cutout: 120mm
Height:65mm








KS-DL09-A-618
Power: 18W
Cutout: 150mm
Height:70mm





KS-DL09-A-825
Power:25W
Cutout: 200mm
Height:90mm



DL09 Series




Model	KS-DL09-A-305	KS-DL09-A-308	KS-DL09-A-412		KS-DL09-A-618	KS-DL09-A-825
Product Photo						
Dimension(mm)						
Cutout(mm)	75	90	120		150	200
Wattage	5W	8W	12W		18W	25W
CCT	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K		2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K
CRI	>90	>90	>90		>90	>90
Beam Angle	90°	90°	90°		90°	90°
Lumen	460LM	735LM	1080LM		1630LM	2274LM
IP	IP20	IP20	IP20		IP20	IP20
Colour	White	White	White		White	White

DL09 Series

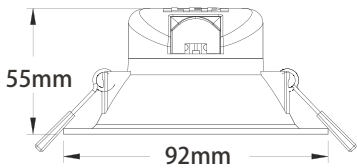


75mm

	Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	KAS-DL09-A-305	5W	34V	120mA	90	2700K	90°	485lm	437lm	ON-OFF
		5W	34V	120mA	90	3000K	90°	510lm	460lm	ON-OFF
		5W	34V	120mA	90	4000K	90°	535lm	482lm	ON-OFF

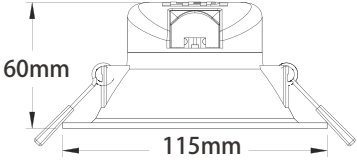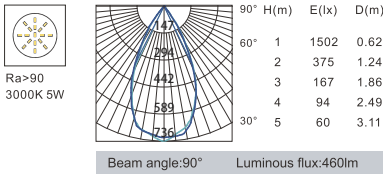


90mm



	Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	KAS-DL09-A-3058	8W	34V	230mA	90	2700K	90°	935lm	706lm	ON-OFF
		8W	34V	230mA	90	3000K	90°	973lm	735lm	ON-OFF
		8W	34V	230mA	90	4000K	90°	989lm	747lm	ON-OFF

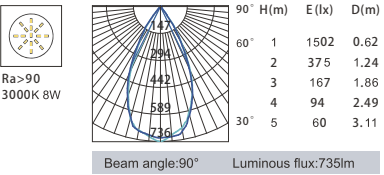


DL09 Series

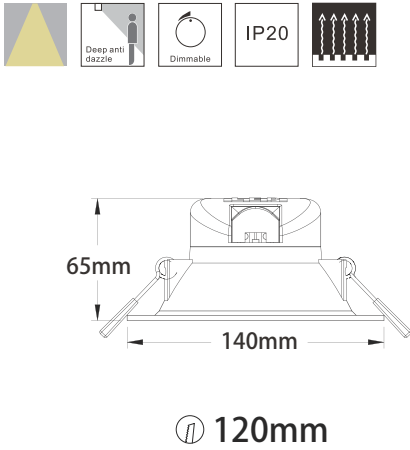


	Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	KAS-DL09-A-412	12W	34V	300mA	90	2700K	90°	1123lm	992lm	ON-OFF
		12W	34V	300mA	90	3000K	90°	1245lm	1100lm	ON-OFF
		12W	34V	300mA	90	4000K	90°	1310lm	1157lm	ON-OFF

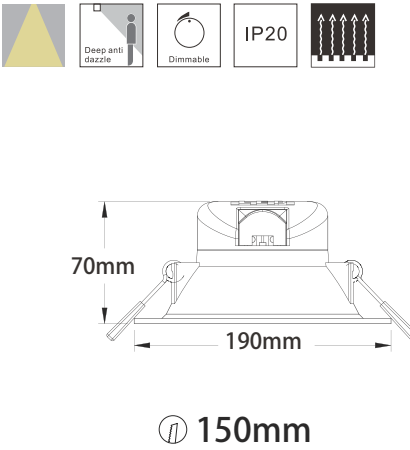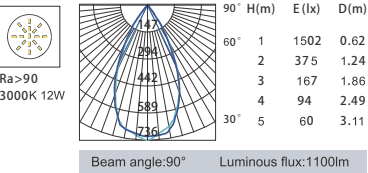

	Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	KAS-DL09-A-618	18W	34V	500mA	90	2700K	90°	1683lm	1571lm	ON-OFF
		18W	34V	500mA	90	3000K	90°	1746lm	1630lm	ON-OFF
		18W	34V	500mA	90	4000K	90°	1855lm	1731lm	ON-OFF


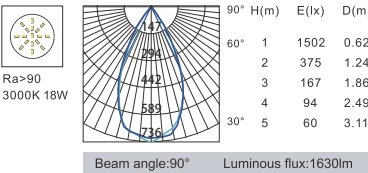


DL09 Series




200mm


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
KAS-DL09-A-825	25W	36V	600mA	90	2700K	90°	2556lm	2188lm	ON-OFF
	25W	36V	600mA	90	3000K	90°	2656lm	2274lm	ON-OFF
	25W	36V	600mA	90	4000K	90°	2696lm	2308lm	ON-OFF

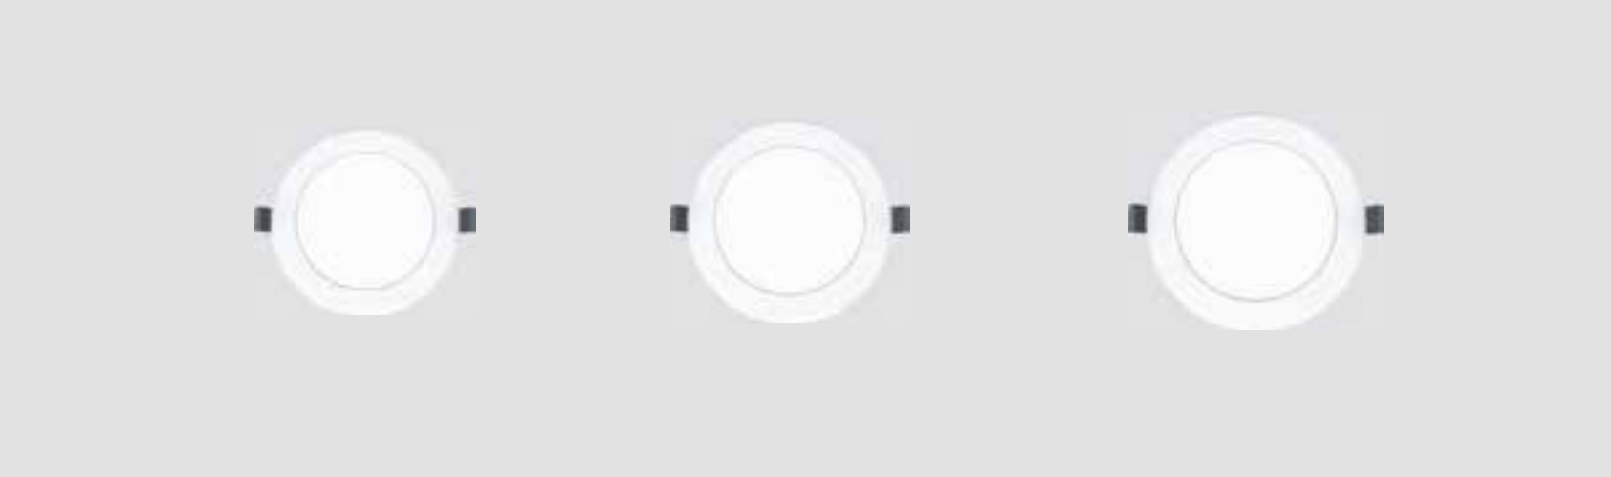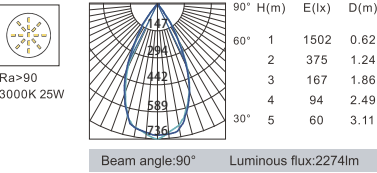


KS-DL09-B-3508
Power: 8W
Cutout: 90mm
Height: 60mm






KS-DL09-B-412
Power: 12W
Cutout: 120mm
Height: 70mm



KS-DL09-B-618
Power: 18W
Cutout: 150mm
Height: 70mm




DL09 Series

Model	KS-DL09-B-308	KS-DL09-B-412	KS-DL09-B-618
Product Photo			
Dimension(mm)			
Cutout(mm)	90	120	150
Wattage	8W	12W	18W
CCT	3000K 3500K 4000K 6000K	3000K 3500K 4000K 6000K	3000K 3500K 4000K 6000K
CRI	>90	>90	>90
Beam Angle	90°	90°	90°
Lumen	747LM	1157LM	1737LM
IP	IP20	IP20	IP20
Colour	White	White	White








⌀ 100mm


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 KAS-DL09-B-308	8W	34V	230mA	90	3000K - 6000K	90°	989lm	747lm	ON-OFF



90°	H(m)	E(lx)	D(m)
60°	1	1502	0.62
	2	375	1.24
	3	167	1.86
	4	94	2.49
	5	60	3.11



Beam angle:90° Luminous flux:735lm

DL09 Series




⌀ 155mm

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 KAS-DL09-B-412	12W	34V	300mA	90	3000K - 6000K	90°	1310lm	1157lm	ON-OFF

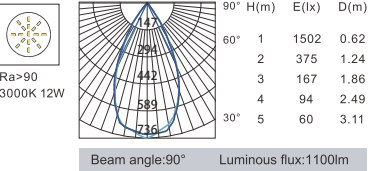

⌀ 200mm

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 KAS-DL09-B-618	18W	34V	500mA	90	3000K - 6000K	90°	1855lm	1731lm	ON-OFF

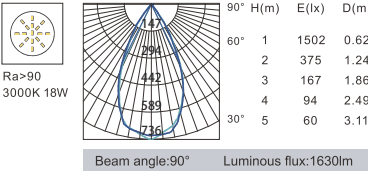



T10 Series







Model	K-T10-A-50	K-T10-C-50	K-T10-D-50
Product Photo			
Dimension(mm)			
Wattage	8W	8W	8W
CCT	2700K-5000K	2700K-5000K	2700K-5000K
CRI	>90	>90	>90
Beam Angle	18°/24°/36°/50°	18°/24°/36°/50°	18°/24°/36°/50°
Lumen	LM80	LM80	LM80
IP	IP20	IP20	IP20
Dimming	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI
Accessory	Honeycomb Filter Stripped Glass Fabric Glass	Honeycomb Filter Stripped Glass Fabric Glass	Honeycomb Filter Stripped Glass Fabric Glass
Colour	Black/White	Black/White	Black/White

Optical Accessories



Honeycomb Filter Stripped Glass Fabric Glass

T10 Series



Model	K-T10-A-72	K-T10-C-72	K-T10-D-72		K-T10-A-80	K-T10-C-80	K-T10-D-80
Product Photo							
Dimension(mm)							
Wattage	20W/25W	20W/25W	20W/25W		25W30W	25W30W	25W30W
CCT	2700K-5000K	2700K-5000K	2700K-5000K		2700K-5000K	2700K-5000K	2700K-5000K
CRI	>90	>90	>90		>90	>90	>90
Beam Angle	18°/24°/36°/50°	18°/24°/36°/50°	18°/24°/36°/50°		18°/24°/36°	18°/24°/36°	18°/24°/36°
Lumen	LM80	LM80	LM80		LM80	LM80	LM80
IP	IP20	IP20	IP20		IP20	IP20	IP20
Dimming	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI		TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI
Installation	Honeycomb Filter Stripped Glass Fabric Glass	Honeycomb Filter Stripped Glass Fabric Glass	Honeycomb Filter Stripped Glass Fabric Glass		Honeycomb Filter Stripped Glass Fabric Glass	Honeycomb Filter Stripped Glass Fabric Glass	Honeycomb Filter Stripped Glass Fabric Glass
Colour	Black/White	Black/White	Black/White		Black/White	Black/White	Black/White

Optical Accessories



Honeycomb Filter Stripped Glass Fabric Glass


T10 Series

Model	K-T10-A-94	K-T10-C-94
Product Photo		
Dimension(mm)		
Wattage	35W/40W	35W/40W
CCT	2700K-5000K	2700K-5000K
CRI	>90	>90
Beam Angle	24°/36°	24°/36°
Lumen	LM80	LM80
IP	IP20	IP20
Dimming	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI
Accessory	Honeycomb Filter Stripped Glass Fabric Glass	Honeycomb Filter Stripped Glass Fabric Glass
Colour	Black/White	Black/White

Optical Accessories





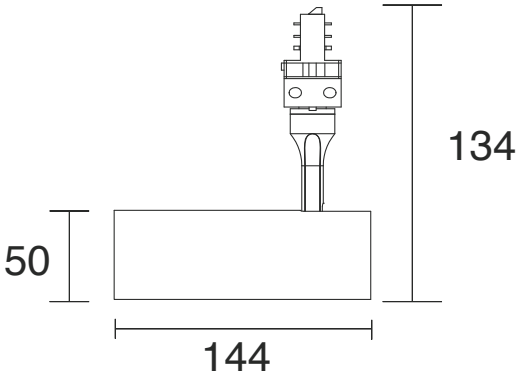



Honeycomb FilterStripped GlassFabric Glass




UGR<19





IP20






Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 K-T10-A-5008	8W	34V	200mA	90	2700K	18°	935lm	706lm	ON-OFF
						24°	935lm	732lm	TRIAC
						36°	935lm	749lm	1-10V
						50°	935lm	713lm	DALI
	8W	34V	200mA	90	3000K	18°	973lm	740lm	ON-OFF
						24°	973lm	766lm	TRIAC
						36°	973lm	783lm	1-10V
						50°	973lm	747lm	DALI
	8W	34V	200mA	90	4000K	18°	989lm	747lm	ON-OFF
						24°	989lm	771lm	TRIAC
						36°	989lm	790lm	1-10V
						50°	989lm	754lm	DALI

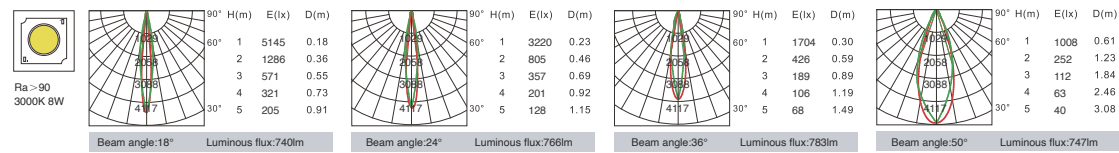


T10 Series

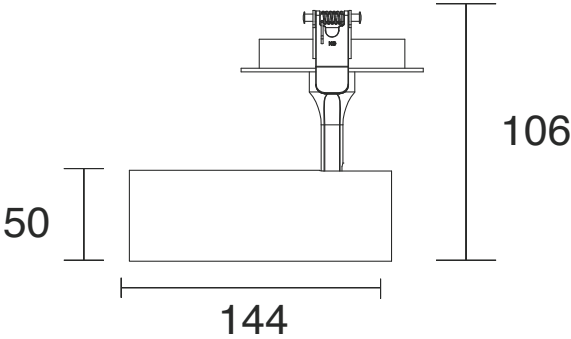


Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	8W	34V	200mA	90	2700K	18°	935lm	706lm	ON-OFF
						24°	935lm	732lm	TRIAC
						36°	935lm	749lm	1-10V
						50°	935lm	713lm	DALI
	8W	34V	200mA	90	3000K	18°	973lm	740lm	ON-OFF
						24°	973lm	766lm	TRIAC
						36°	973lm	783lm	1-10V
						50°	973lm	747lm	DALI
	8W	34V	200mA	90	4000K	18°	989lm	747lm	ON-OFF
						24°	989lm	771lm	TRIAC
						36°	989lm	790lm	1-10V
						50°	989lm	754lm	DALI

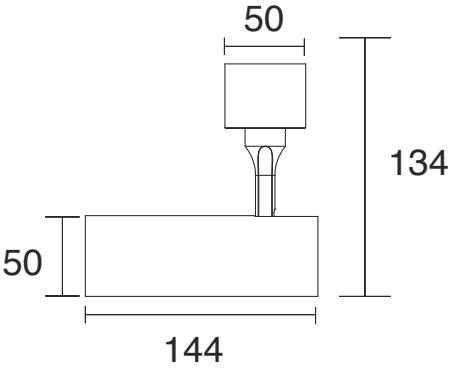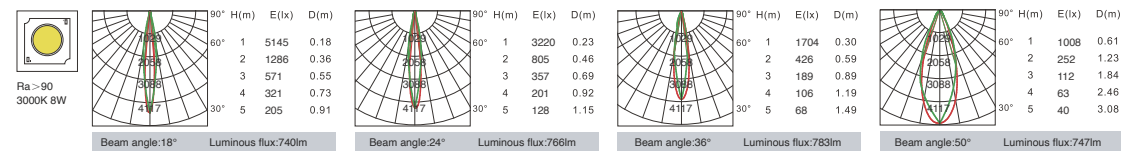

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	8W	34V	200mA	90	2700K	18°	935lm	706lm	ON-OFF
						24°	935lm	732lm	TRIAC
						36°	935lm	749lm	1-10V
						50°	935lm	713lm	DALI
	8W	34V	200mA	90	3000K	18°	973lm	740lm	ON-OFF
						24°	973lm	766lm	TRIAC
						36°	973lm	783lm	1-10V
						50°	973lm	747lm	DALI
	8W	34V	200mA	90	4000K	18°	989lm	747lm	ON-OFF
						24°	989lm	771lm	TRIAC
						36°	989lm	790lm	1-10V
						50°	989lm	754lm	DALI




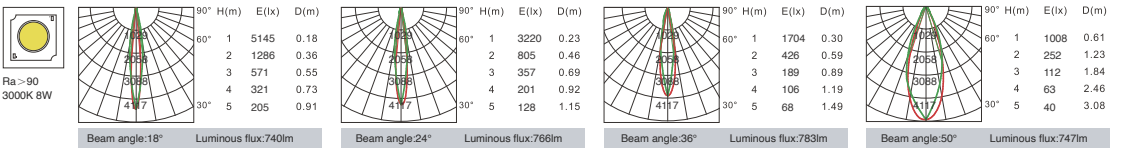


T10 Series

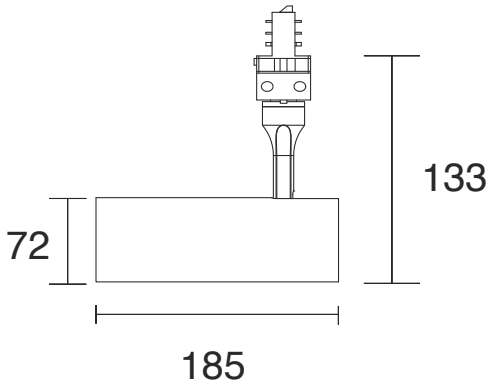



Honeycomb Filter Stripped Glass Fabric Glass

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
K-T10-A-7220	20W	36V	500mA	90	2700K	18°	2044lm	1778lm	ON-OFF
						24°	2044lm	1805lm	TRIAC
						36°	2044lm	1837lm	1-10V
						50°	2044lm	1668lm	DALI
	20W	36V	500mA	90	3000K	18°	2124lm	1813lm	ON-OFF
						24°	2124lm	1840lm	TRIAC
						36°	2124lm	1872lm	1-10V
						50°	2124lm	1703lm	DALI
	20W	36V	500mA	90	4000K	18°	2154lm	1848lm	ON-OFF
						24°	2154lm	1875lm	TRIAC
						36°	2154lm	1907lm	1-10V
						50°	2154lm	1738lm	DALI
K-T10-A-7225	25W	36V	600mA	90	2700K	18°	2556lm	2085lm	ON-OFF
						24°	2556lm	2122lm	TRIAC
						36°	2556lm	2182lm	1-10V
						50°	2556lm	1969lm	DALI
	25W	36V	600mA	90	3000K	18°	2656lm	2120lm	ON-OFF
						24°	2656lm	2157lm	TRIAC
						36°	2656lm	2217lm	1-10V
						50°	2656lm	2004lm	DALI
	25W	36V	600mA	90	4000K	18°	2696lm	2155lm	ON-OFF
						24°	2696lm	2192lm	TRIAC
						36°	2696lm	2252lm	1-10V
						50°	2696lm	2039lm	DALI

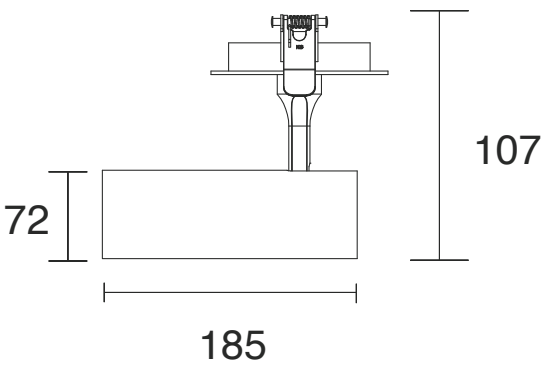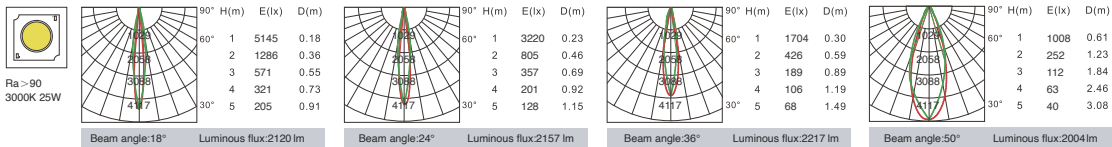
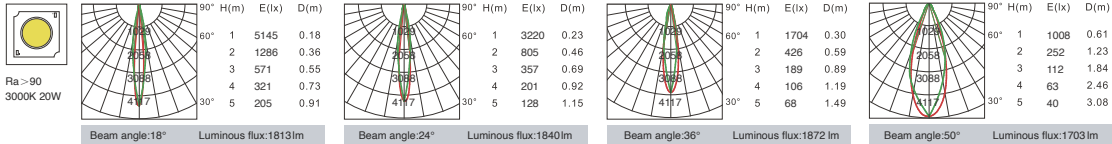


Honeycomb Filter Stripped Glass Fabric Glass

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
K-T10-C-7220	20W	36V	500mA	90	2700K	18°	2044lm	1778lm	ON-OFF
						24°	2044lm	1805lm	TRIAC
						36°	2044lm	1837lm	1-10V
						50°	2044lm	1668lm	DALI
	20W	36V	500mA	90	3000K	18°	2124lm	1813lm	ON-OFF
						24°	2124lm	1840lm	TRIAC
						36°	2124lm	1872lm	1-10V
						50°	2124lm	1703lm	DALI
	20W	36V	500mA	90	4000K	18°	2154lm	1848lm	ON-OFF
						24°	2154lm	1875lm	TRIAC
						36°	2154lm	1907lm	1-10V
						50°	2154lm	1738lm	DALI
K-T10-C-7225	25W	36V	600mA	90	2700K	18°	2556lm	2085lm	ON-OFF
						24°	2556lm	2122lm	TRIAC
						36°	2556lm	2182lm	1-10V
						50°	2556lm	1969lm	DALI
	25W	36V	600mA	90	3000K	18°	2656lm	2120lm	ON-OFF
						24°	2656lm	2157lm	TRIAC
						36°	2656lm	2217lm	1-10V
						50°	2656lm	2004lm	DALI
	25W	36V	600mA	90	4000K	18°	2696lm	2155lm	ON-OFF
						24°	2696lm	2192lm	TRIAC
						36°	2696lm	2252lm	1-10V
						50°	2696lm	2039lm	DALI


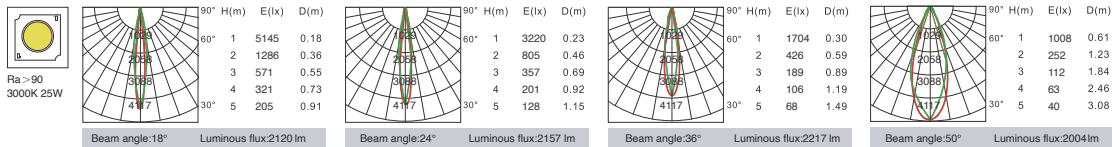
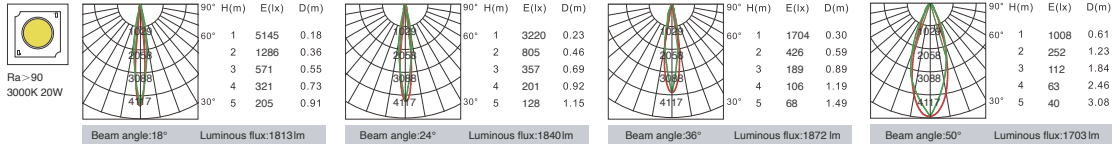


T10 Series

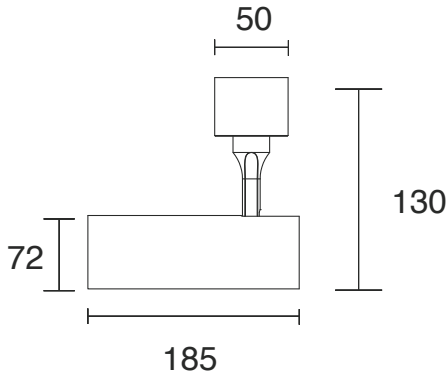



Honeycomb Filter Stripped Glass Fabric Glass

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
K-T10-D-7220	20W	36V	500mA	90	2700K	18°	2556lm	1778lm	ON-OFF
						24°	2556lm	1805lm	TRIAC
						36°	2556lm	1837lm	1-10V
						50°	2556lm	1668lm	DALI
	20W	36V	500mA	90	3000K	18°	2656lm	1813lm	ON-OFF
						24°	2656lm	1840lm	TRIAC
						36°	2656lm	1872lm	1-10V
						50°	2656lm	1703lm	DALI
	20W	36V	500mA	90	4000K	18°	2696lm	1848lm	ON-OFF
						24°	2696lm	1875lm	TRIAC
						36°	2696lm	1907lm	1-10V
						50°	2696lm	1738lm	DALI
K-T10-D-7225	25W	36V	600mA	90	2700K	18°	2556lm	2085lm	ON-OFF
						24°	2556lm	2122lm	TRIAC
						36°	2556lm	2182lm	1-10V
						50°	2556lm	1969lm	DALI
	25W	36V	600mA	90	3000K	18°	2656lm	2120lm	ON-OFF
						24°	2656lm	2157lm	TRIAC
						36°	2656lm	2217lm	1-10V
						50°	2656lm	2004lm	DALI
	25W	36V	600mA	90	4000K	18°	2696lm	2155lm	ON-OFF
						24°	2696lm	2192lm	TRIAC
						36°	2696lm	2252lm	1-10V
						50°	2696lm	2039lm	DALI

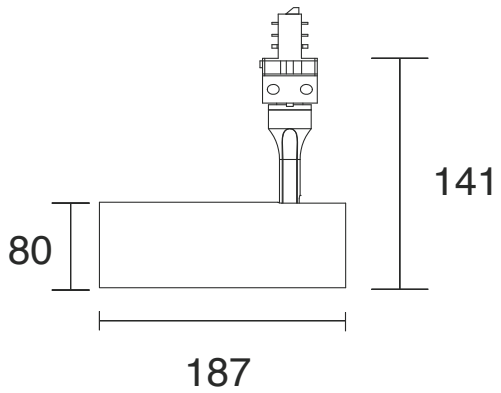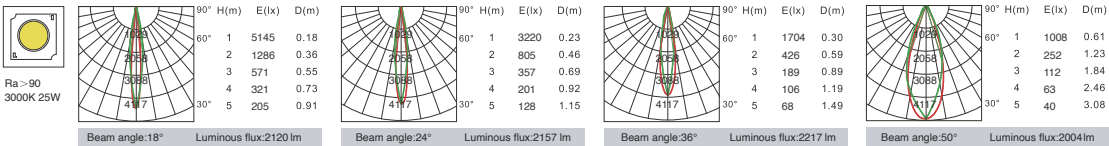
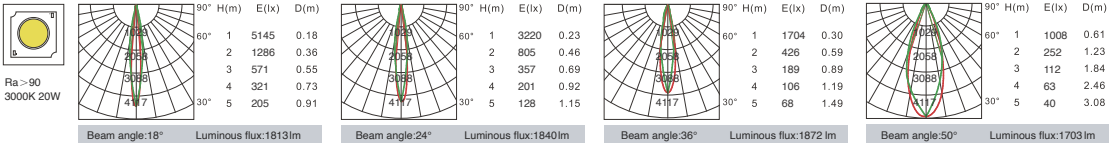


Honeycomb Filter Stripped Glass Fabric Glass

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
K-T10-A-8025	25W	36V	600mA	90	2700K	13°	2556lm	1943lm	ON-OFF
						20°	2556lm	2043lm	TRIAC
						36°	2556lm	2056lm	1-10V
						36°	2556lm	2056lm	DALI
	25W	36V	600mA	90	3000K	13°	2656lm	1978lm	ON-OFF
						20°	2656lm	2078lm	TRIAC
						36°	2656lm	2091lm	1-10V
						36°	2656lm	2091lm	DALI
	25W	36V	600mA	90	4000K	13°	2696lm	2013lm	ON-OFF
						20°	2696lm	2113lm	TRIAC
						36°	2696lm	2126lm	1-10V
						36°	2696lm	2126lm	DALI
K-T10-A-8030	30W	36V	700mA	90	2700K	13°	2990lm	2555lm	ON-OFF
						20°	2990lm	1543lm	TRIAC
						36°	2990lm	2771lm	1-10V
						36°	2990lm	2771lm	DALI
	30W	36V	700mA	90	3000K	13°	3107lm	2596lm	ON-OFF
						20°	3107lm	2584lm	TRIAC
						36°	3107lm	2810lm	1-10V
						36°	3107lm	2810lm	DALI
	30W	36V	700mA	90	4000K	13°	3154lm	2637lm	ON-OFF
						20°	3154lm	2625lm	TRIAC
						36°	3154lm	2851lm	1-10V
						36°	3154lm	2851lm	DALI


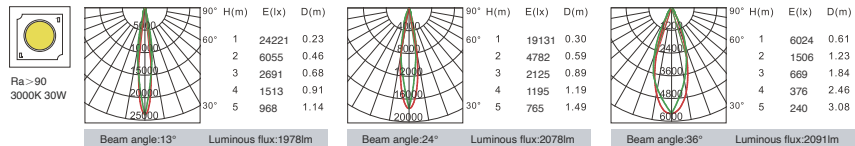
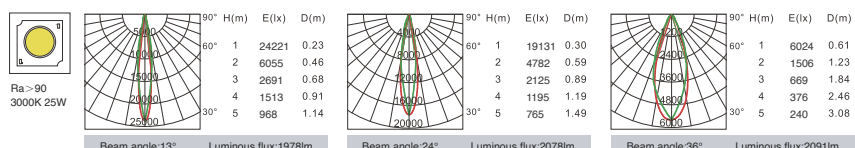


T10 Series

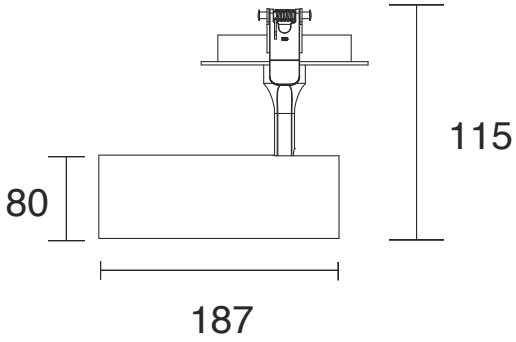


Honeycomb Filter Stripped Glass Fabric Glass

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	25W	36V	600mA	90	2700K	13°	2556lm	1943lm	ON-OFF TRIAC 1-10V DALI
						20°	2556lm	2043lm	
						36°	2556lm	2056lm	
	25W	36V	600mA	90	3000K	13°	2656lm	1978lm	ON-OFF TRIAC 1-10V DALI
						20°	2656lm	2078lm	
						36°	2656lm	2091lm	
	25W	36V	600mA	90	4000K	13°	2696lm	2013lm	ON-OFF TRIAC 1-10V DALI
						20°	2696lm	2113lm	
						36°	2696lm	2126lm	
	30W	36V	700mA	90	2700K	13°	2990lm	2555lm	ON-OFF TRIAC 1-10V DALI
						20°	2990lm	1543lm	
						36°	2990lm	2771lm	
	30W	36V	700mA	90	3000K	13°	3107lm	2596lm	ON-OFF TRIAC 1-10V DALI
						20°	3107lm	2584lm	
						36°	3107lm	2810lm	
	30W	36V	700mA	90	4000K	13°	3154lm	2637lm	ON-OFF TRIAC 1-10V DALI
						20°	3154lm	2625lm	
						36°	2154lm	2851lm	

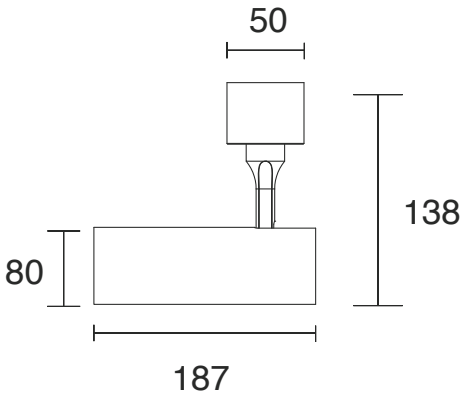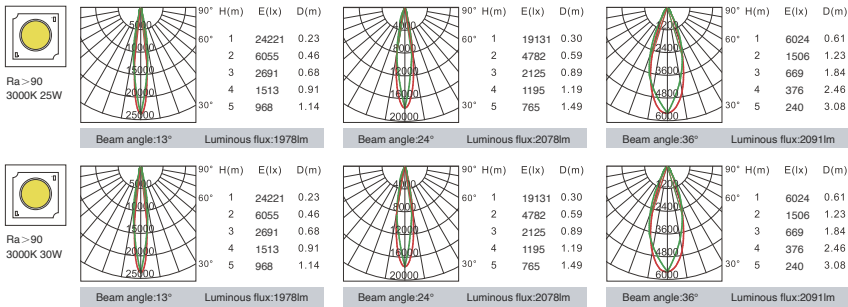


Honeycomb Filter Stripped Glass Fabric Glass

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	25W	36V	600mA	90	2700K	13°	2556lm	1943lm	ON-OFF TRIAC 1-10V DALI
						20°	2556lm	2043lm	
						36°	2556lm	2056lm	
	25W	36V	600mA	90	3000K	13°	2656lm	1978lm	ON-OFF TRIAC 1-10V DALI
						20°	2656lm	2078lm	
						36°	2656lm	2091lm	
	25W	36V	600mA	90	4000K	13°	2696lm	2013lm	ON-OFF TRIAC 1-10V DALI
						20°	2696lm	2113lm	
						36°	2696lm	2126lm	
	30W	36V	700mA	90	2700K	13°	2990lm	2555lm	ON-OFF TRIAC 1-10V DALI
						20°	2990lm	1543lm	
						36°	2990lm	2771lm	
	30W	36V	700mA	90	3000K	13°	3107lm	2596lm	ON-OFF TRIAC 1-10V DALI
						20°	3107lm	2584lm	
						36°	3107lm	2810lm	
	30W	36V	700mA	90	4000K	13°	3154lm	2637lm	ON-OFF TRIAC 1-10V DALI
						20°	3154lm	2625lm	
						36°	2154lm	2851lm	


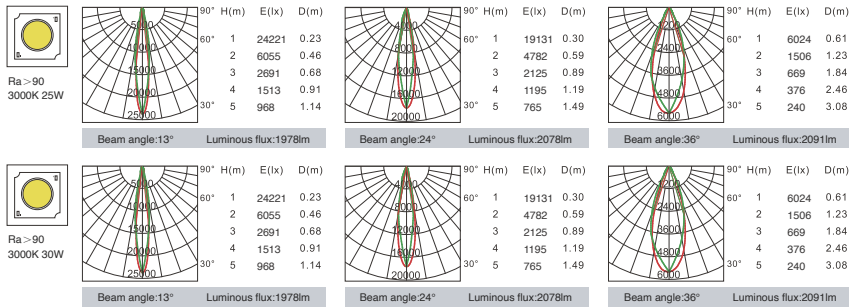


T10 Series

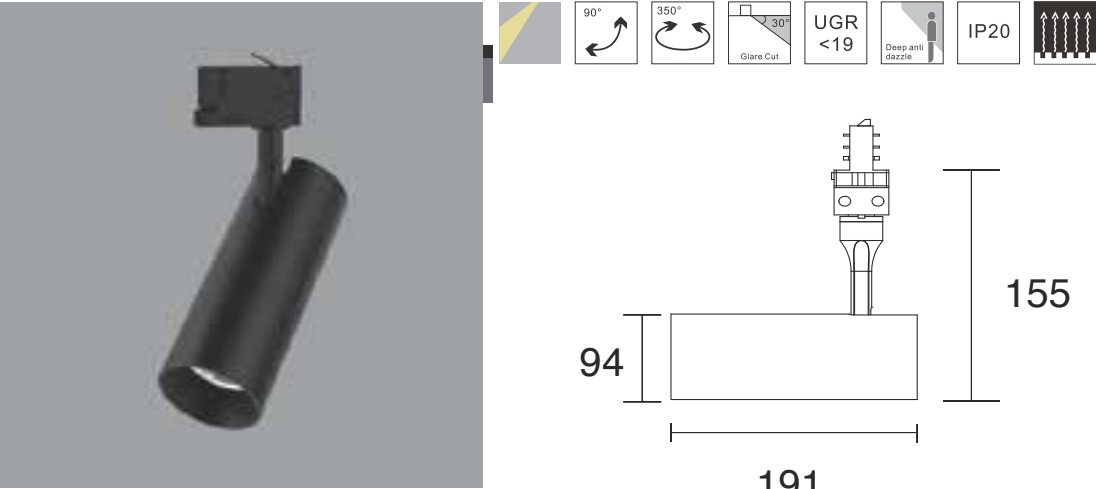


Honeycomb Filter Stripped Glass Fabric Glass

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 K-T10-A-9435	35W	36V	900mA	90	2700K	20° 24° 36°	3266lm 3266lm 3266lm	2632lm 2776lm 2258lm	ON-OFF DALI
	35W	36V	900mA	90	3000K	20° 24° 36°	3389lm 3389lm 3389lm	2734lm 2884lm 3260lm	ON-OFF DALI
	35W	36V	900mA	90	4000K	20° 24° 36°	3547lm 3547lm 3547lm	2862lm 3018lm 3412lm	ON-OFF DALI
 K-T10-A-9440	40W	36V	1000mA	90	2700K	20° 24° 36°	3708lm 3708lm 3708lm	2991lm 3453lm 3488lm	ON-OFF DALI
	40W	36V	1000mA	90	3000K	20° 24° 36°	3852lm 3852lm 3852lm	3108lm 3588lm 3624lm	ON-OFF DALI
	40W	36V	1000mA	90	4000K	20° 24° 36°	4032lm 4032lm 4032lm	3253lm 3755lm 3793lm	ON-OFF DALI

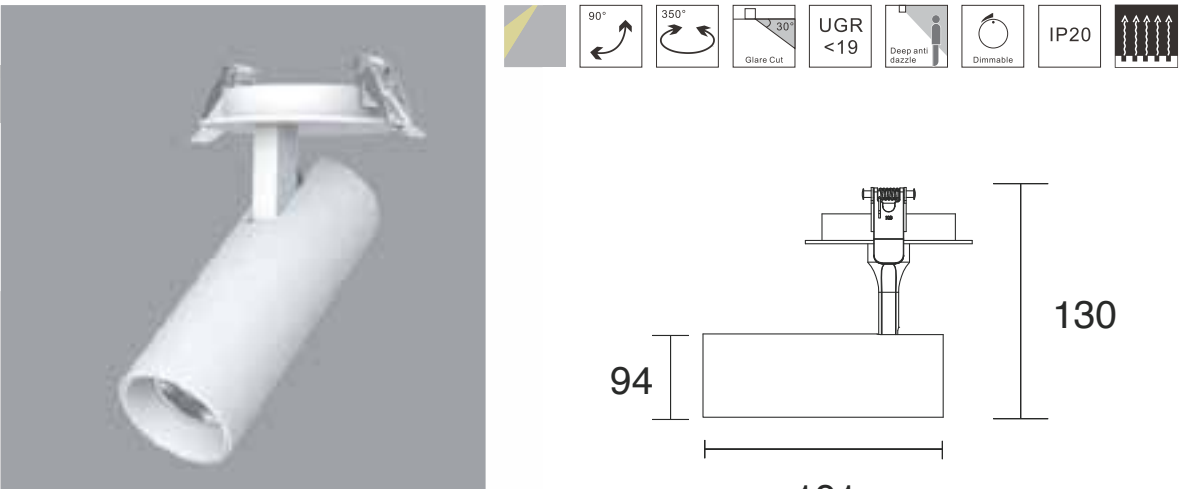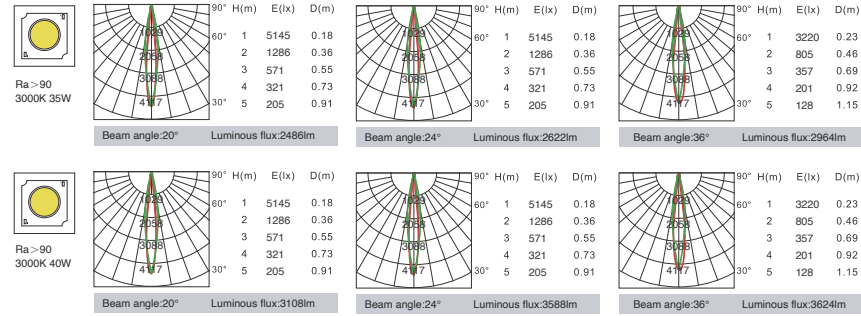

Honeycomb Filter Stripped Glass Fabric Glass

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
 K-T10-C-9435	35W	36V	900mA	90	2700K	20° 24° 36°	3266lm 3266lm 3266lm	2632lm 2776lm 2258lm	ON-OFF DALI
	35W	36V	900mA	90	3000K	20° 24° 36°	3389lm 3389lm 3389lm	2734lm 2884lm 3260lm	ON-OFF DALI
	35W	36V	900mA	90	4000K	20° 24° 36°	3547lm 3547lm 3547lm	2862lm 3018lm 3412lm	ON-OFF DALI
 K-T10-C-9440	40W	36V	1000mA	90	2700K	20° 24° 36°	3708lm 3708lm 3708lm	2991lm 3453lm 3488lm	ON-OFF DALI
	40W	36V	1000mA	90	3000K	20° 24° 36°	3852lm 3852lm 3852lm	3108lm 3588lm 3624lm	ON-OFF DALI
	40W	36V	1000mA	90	4000K	20° 24° 36°	4032lm 4032lm 4032lm	3253lm 3755lm 3793lm	ON-OFF DALI

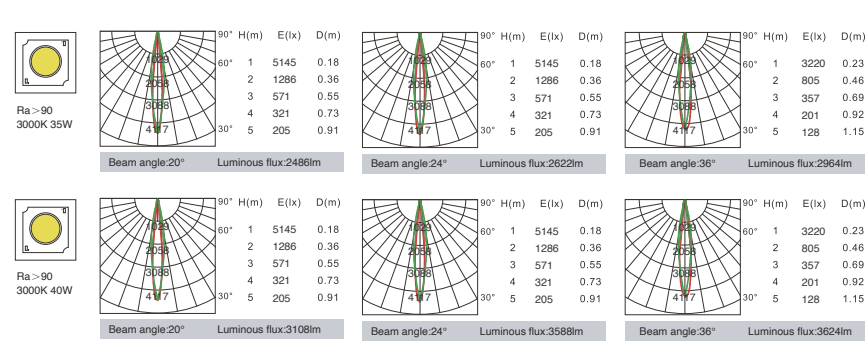

T10 Series



-High quality LED cob light source is adopted, and the luminous efficiency is up to 80lm / W
-It can be adjusted 350 degrees horizontally and 90 degrees vertically to make the projection angle more accurate - deep hiding anti dazzle, driving built-in
-Using LED optical lens, the angle is accurate and the transition is uniform
-The use of high-quality die-casting aluminum radiator and passive heat dissipation can effectively dissipate the heat of the chip, so as to ensure the reasonable thermal performance and long service life of the lamp body


Model	KAS-TL23-A-95	KAS-TL23-A-110
Product Photo		
Dimension(mm)		
Wattage	30W/35W	40W
CCT	3000K/3500K/4000K	3000K/3500K/4000K
CRI	>90	>90
Beam Angle	15°/20°/36°/60°	15°/24°/40°
Lumen	1600-2403LM	1865-1902LM
IP	IP 20	IP 20
Dimming	TRIAC/1- 10V/DALI	TRIAC/1-10V/DALI
Accessory	1-phase track 2-phase track 3-phase track	1-phase track 2-phase track 3-phase track
Colour	Black/White	Black/White

Optical Accessories






Honeycomb Filter Stripped Glass Fabric Glass


T10 Series

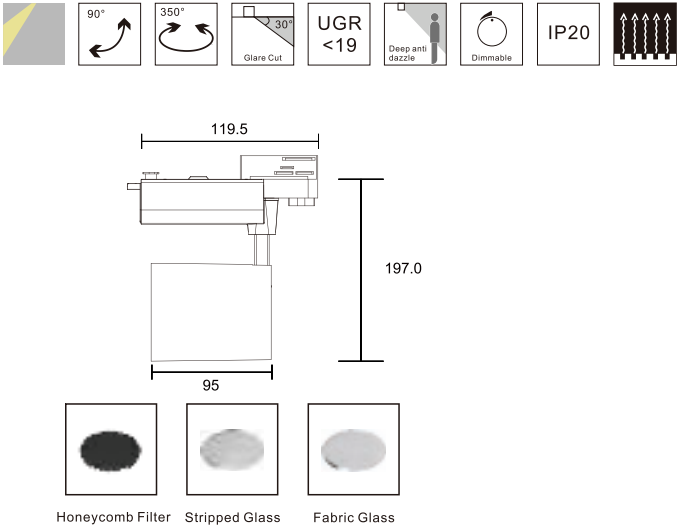

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	30W	34V	700mA	90	2700K	15°	2853lm	1600lm	ON-OFF TRIAC
						20°	2853lm	1947lm	1-10V
						36°	2853lm	1808lm	DALI
						55°	2853lm	1810lm	
	30W	34V	700mA	90	3000K	15°	2970lm	1666lm	ON-OFF TRIAC
						20°	2970lm	2027lm	1-10V
						36°	2970lm	1883lm	DALI
						55°	2970lm	1885lm	
	30W	34V	700mA	90	4000K	15°	3018lm	1692lm	ON-OFF TRIAC
						20°	3018lm	2059lm	1-10V
						36°	3018lm	1913lm	DALI
						55°	3018lm	1915lm	
	35W	34V	800mA	90	2700K	15°	3261lm	2162lm	ON-OFF TRIAC
						20°	3261lm	2049lm	1-10V
						36°	3261lm	2054lm	DALI
						55°	3261lm	2273lm	
	35W	34V	800mA	90	3000K	15°	3394lm	2253lm	ON-OFF TRIAC
						20°	3394lm	2133lm	1-10V
						36°	3394lm	2138lm	DALI
						55°	3394lm	2366lm	
	35W	34V	800mA	90	4000K	15°	3448lm	2288lm	ON-OFF TRIAC
						20°	3448lm	2166lm	1-10V
						36°	3448lm	2172lm	DALI
						55°	3448lm	2403lm	

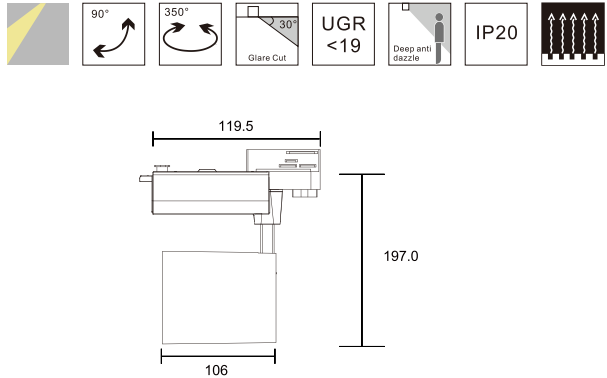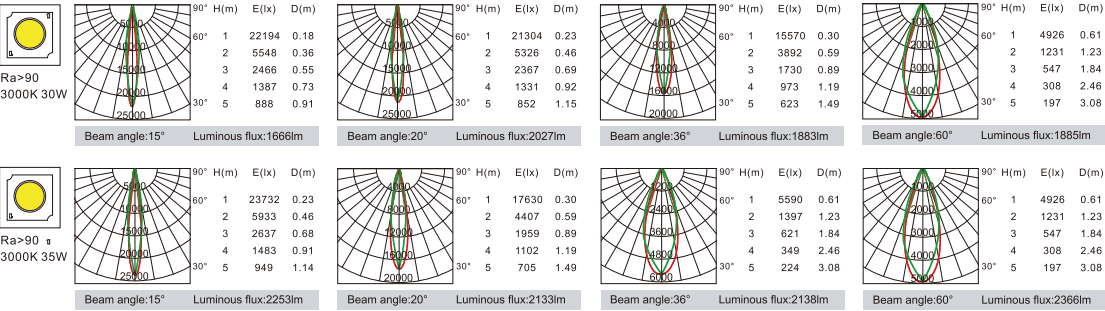

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	40W	34V	900mA	90	2700K	15°	3831lm	1865lm	ON-OFF TRIAC
						24°	3831lm	1841lm	1-10V
						40°	3831lm	1802lm	DALI
	40W	34V	900mA	90	3000K	15°	3984lm	1940lm	ON-OFF TRIAC
						24°	3984lm	1915lm	1-10V
						40°	3984lm	1874lm	DALI
	40W	34V	900mA	90	4000K	15°	4045lm	1969lm	ON-OFF TRIAC
						24°	4045lm	1944lm	1-10V
						40°	4045lm	1902lm	DALI

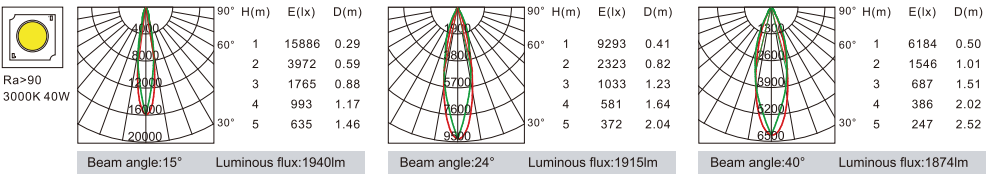



T1 series spot light



Titans T1 series



KS-T1-A-50
Power: 7W/12W
Diameter: 50mm







KS-T1-A-66
Power: 15W/20W
Diameter: 60mm



KS-T1-A-74
Power: 25W/30W
Diameter: 74mm



KS-T1-A-90
Power: 35W/40W
Diameter: 90mm



Titans T1 series



KS-T1-A-50
Power: 7W/12W
Diameter: 50mm







KS-T1-A-66
Power: 15W/20W
Diameter: 60mm







KS-T1-A-74
Power: 25W/30W
Diameter: 74mm



KS-T1-A-90
Power: 35W/40W
Diameter: 90mm







Titans T1 series

Model	KS-T1-A-50	KS-T1-A-66		KS-T1-A-74	KS-T1-A-90
Product Photo					
Dimension(mm)					
Wattage	7W/12W	15W/20W		25W/30W	35W/40W
CCT	3000K/3500K/4000K	3000K/3500K/4000K		3000K/3500K/4000K	3000K/3500K/4000K
CRI	>90	>90		>90	>90
Beam Angle	18°/24°/36°/50°	12°/18°/22°/36°		15°/24°/35°/55°	15°/24°/35°/55°
Lumen	480-806LM	1154-1885LM		2041-2633LM	2053-3688LM
IP	IP 20	IP 20		IP 20	IP 20
Dimming	TRI AC/1-10V/DALI	TRI AC/1-10V/DALI		TRI AC/1-10V/DALI	TRIAC/1 -10V/DALI
Accessory	Honeycomb Filter Stripped Glass Fabric Glass	Honeycomb Filter Stripped Glass Fabric Glass		Honeycomb Filter Stripped Glass Fabric Glas s	Honeycomb Filter Stripped Glass Fabric Glass
Installation	1-phase track 2-phase track 3-phase track	1-phase track 2-phase track 3-phase track		1-phase track 2-phase track 3-phase track	1-phase track 2-phase track 3-phase track
Colour	Black/White	Black/White		Black/White	Black/White

Optical Accessories



Titans T1 series



Model	KS-T1-A-50	KS-T1-A-66		KS-T1-A-74	KS-T1-A-90
Product Photo					
Dimension(mm)					
Wattage	7W/12W	15W/20W		25W/30W	35W/40W
CCT	3000K/3500K/4000K	3000K/3500K/4000K		3000K/3500K/4000K	3000K/3500K/4000K
CRI	>90	>90		>90	>90
Beam Angle	18°/24°/36°/50°	12°/18°/22°/36°		15°/24°/35°/55°	15°/24°/35°/55°
Lumen	480-806LM	1154-1885LM		2041-2633LM	2053-3688LM
IP	IP 20	IP 20		IP 20	IP 20
Dimming	TRI AC/1-10V/DALI	TRI AC/1-10V/DALI		TRI AC/1-10V/DALI	TRIAC/1-10V/DALI
Access ory	Honeycomb Filter Stripped Glas s Fabric Glas s	Honeycomb Filter Stripped Glas s Fabric Glas s		Honeycomb Filter Stripped Glas s Fabric Glas s	Honeycomb Filter Stripped Glas s Fabric Glas s
Installation	1-phase track 2-phase track 3-phase track	1-phase track 2-phase track 3-phase track		1-phase track 2-phase track 3-phase track	1-phase track 2-phase track 3-phase track
Colour	Black/White	Black/White		Black/White	Black/White

Optical Accessories





Honeycomb Filter Stripped Glas s Fabric Glas s

Titans T1 series




	Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	KS-T1-A-5007	7W	36V	200mA	90	2700K	18°	556lm	498lm	ON-OFF
							24°	556lm	508lm	TRIAC
							36°	556lm	505lm	1-10V
							50°	556lm	503lm	DALI
							18°	577lm	497lm	ON-OFF
							24°	577lm	528lm	TRIAC
		7W	36V	200mA	90	3000K	36°	577lm	525lm	1-10V
							50°	577lm	522lm	DALI
							18°	604lm	831lm	ON-OFF
							24°	604lm	552lm	TRIAC
							36°	604lm	549lm	1-10V
							50°	604lm	546lm	DALI
	KS-T1-A-5012	12W	36V	300mA	90	2700K	18°	1112lm	860lm	ON-OFF
							24°	1112lm	906lm	TRIAC
							36°	1112lm	906lm	1-10V
							50°	1112lm	884lm	DALI
							18°	1155lm	894lm	ON-OFF
							24°	1155lm	939lm	TRIAC
		12W	36V	300mA	90	3000K	36°	1155lm	939lm	1-10V
							50°	1155lm	919lm	DALI
							18°	1209lm	935lm	ON-OFF
							24°	1209lm	982lm	TRIAC
							36°	1209lm	982lm	1-10V
							50°	1209lm	961lm	DALI





	Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	KS-T1-A-6615	15W	36V	350mA	90	2700K	12°	1297lm	1118lm	ON-OFF
							18°	1297lm	1154lm	TRIAC
							22°	1297lm	1118lm	1-10V
							36°	1297lm	1158lm	DALI
							12°	1348lm	1163lm	ON-OFF
							18°	1348lm	1200lm	TRIAC
		15W	36V	350mA	90	3000K	22°	1348lm	1163lm	1-10V
							36°	1348lm	1204lm	DALI
							12°	1411lm	1217lm	ON-OFF
							18°	1411lm	1256lm	TRIAC
							22°	1411lm	1217lm	1-10V
							36°	1411lm	1260lm	DALI
	KS-T1-A-6620	20W	36V	500mA	90	2700K	12°	1854lm	1503lm	ON-OFF
							18°	1854lm	1646lm	TRIAC
							22°	1854lm	1624lm	1-10V
							36°	1854lm	1733lm	DALI
							12°	1926lm	1562lm	ON-OFF
							18°	1926lm	1710lm	TRIAC
		20W	36V	500mA	90	3000K	22°	1926lm	1688lm	1-10V
							36°	1926lm	1801lm	DALI
							12°	2016lm	1634lm	ON-OFF
							18°	2016lm	1789lm	TRIAC
							22°	2016lm	1766lm	1-10V
							36°	2016lm	1885lm	DALI


Titans T1 series

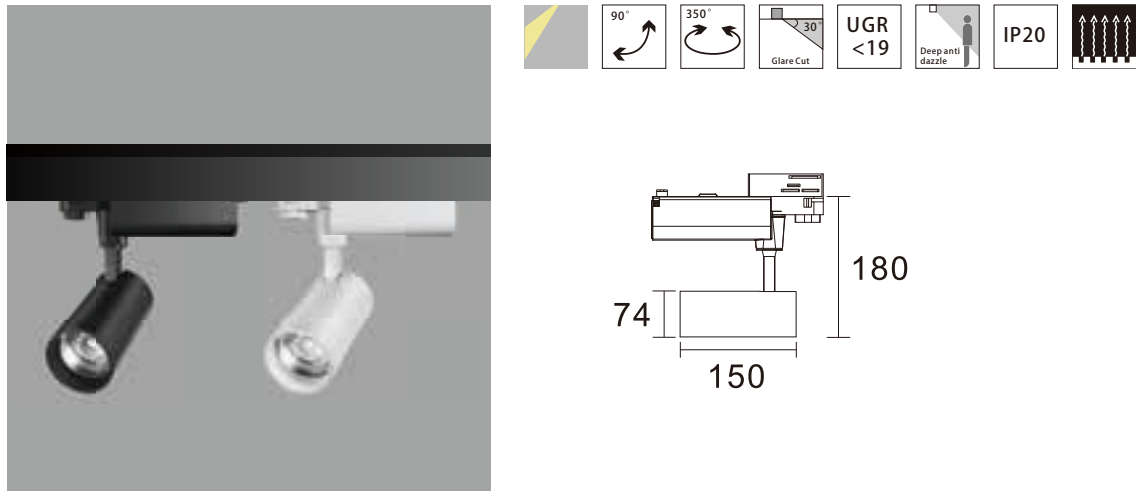

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
KS-T1-A-7425	25W	36V	600mA	90	2700K	15° 24° 36°	2225lm 2225lm 2225lm	2041lm 2076lm 2134lm	ON-OFF TRIAC 1-10V DALI
	25W	36V	600mA	90	3000K	15° 24° 36°	2311lm 2311lm 2311lm	2120lm 2157lm 2217lm	ON-OFF TRIAC 1-10V DALI
	25W	36V	600mA	90	4000K	15° 24° 36°	2419lm 2419lm 2419lm	2213lm 2257lm 2320lm	ON-OFF TRIAC 1-10V DALI
KS-T1-A-7430	30W	36V	800mA	90	2700K	15° 24° 36°	2595lm 2595lm 2595lm	2341lm 2421lm 2222lm	ON-OFF TRIAC 1-10V DALI
	30W	36V	800mA	90	3000K	15° 24° 36°	2696lm 2696lm 2696lm	2433lm 2516lm 2309lm	ON-OFF TRIAC 1-10V DALI
	30W	36V	800mA	90	4000K	15° 24° 36°	2822lm 2822lm 2822lm	2546lm 2633lm 2416lm	ON-OFF TRIAC 1-10V DALI

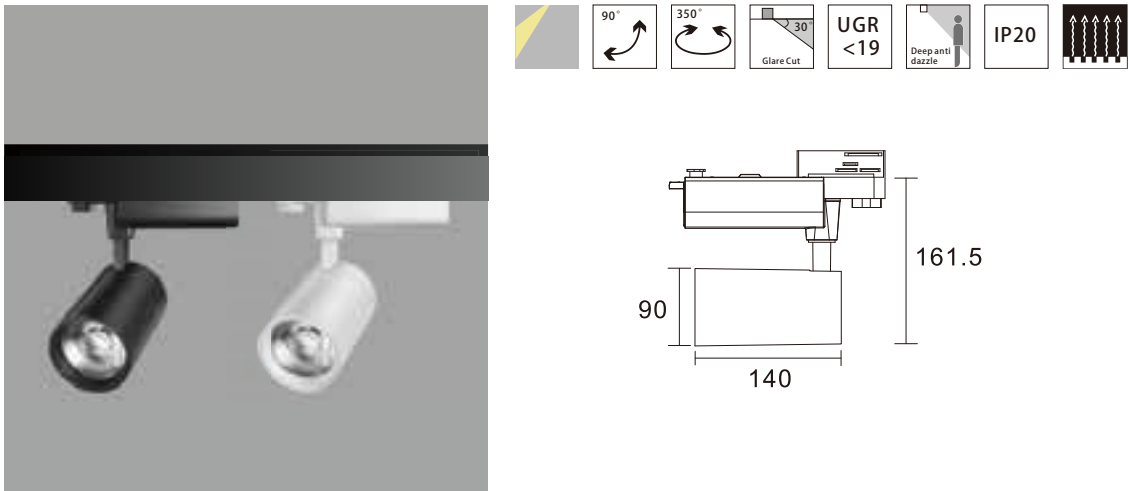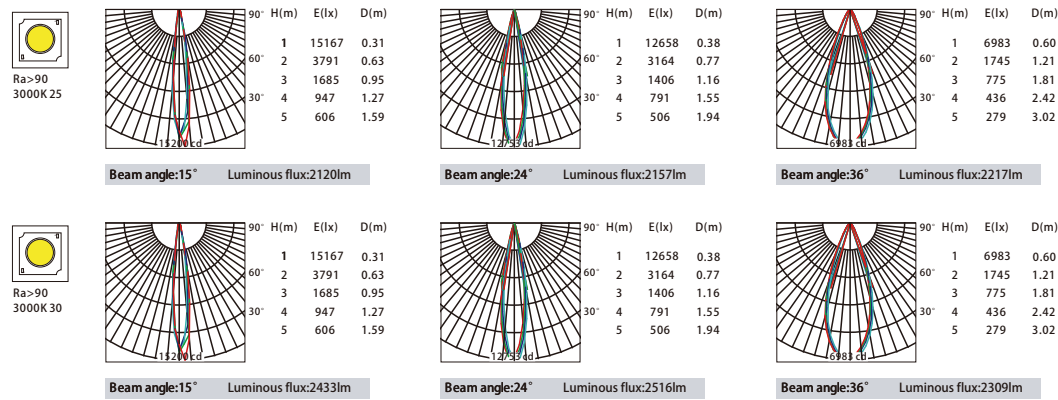

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
KS-T1-A-9035	35W	36V	900mA	90	2700K	20° 24° 36°	2966lm 2966lm 2966lm	2393lm 2524lm 2053lm	ON-OFF TRIAC 1-10V DALI
	35W	36V	900mA	90	3000K	20° 24° 36°	3081lm 3081lm 3081lm	2486lm 2622lm 2964lm	ON-OFF TRIAC 1-10V DALI
	35W	36V	900mA	90	4000K	20° 24° 36°	3225lm 3225lm 3225lm	2602lm 2744lm 3102lm	ON-OFF TRIAC 1-10V DALI
KS-T1-A-9040	40W	36V	1200mA	90	2700K	20° 24° 36°	3708lm 3708lm 3708lm	2995lm 3392lm 3254lm	ON-OFF TRIAC 1-10V DALI
	40W	36V	1200mA	90	3000K	20° 24° 36°	3852lm 3852lm 3852lm	3112lm 3524lm 3381lm	ON-OFF TRIAC 1-10V DALI
	40W	36V	1200mA	90	4000K	20° 24° 36°	4032lm 4032lm 4032lm	3257lm 3688lm 3538lm	ON-OFF TRIAC 1-10V DALI

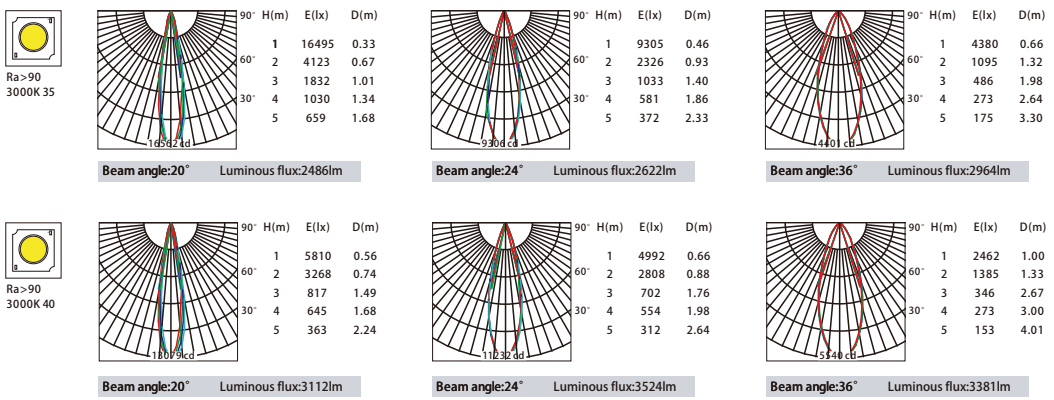

Titans T1 series







KS-T1-B-50
Power: 12W
Diameter: 50mm

KS-T1-B-66
Power: 15W/20W
Diameter: 66mm

KS-T1-B-74
Power: 25W/30W
Diameter: 74mm


KS-T1-B-90
Power: 35W/40W
Diameter: 90mm




Titans T1 series




KS-T1-B-50
Power: 12W
Diameter: 50mm




KS-T1-B-66
Power: 15W/20W
Diameter: 66mm







KS-T1-B-74
Power: 25W/30W
Diameter: 74mm



KS-T1-B-90
Power: 35W/40W
Diameter: 90mm







Titans T1 series

Model	KS-T1-B-5012	KS-T1-B-6615		KS-T1-B-7425	KS-T1-B-9035
Product Photo					
Dimension(mm)					
Wattage	12W	15W/20W		25W/30W	35W/40W
CCT	3000K/3500K/4000K	3000K/3500K/4000K		3000K/3500K/4000K	3000K/3500K/4000K
CRI	>90	>90		>90	>90
Beam Angle	18°/24°/36°/50°	12°/18°/22°/36°		15°/24°/36°	20°/24°/36°
Lumen	860-982LM	1018-1885LM		2041-2491LM	2053-3793LM
IP	IP 20	IP 20		IP 20	IP 20
Dimming	DALI	DALI		DALI	DALI
Accessory	Honeycomb Filter Stripped Glass Fabric Glass	Honeycomb Filter Stripped Glass Fabric Glass		Honeycomb Filter Stripped Glass Fabric Glass	
Installation	1-phase track 2-phase track 3-phase track	1-phase track 2-phase track 3-phase track		1-phase track 2-phase track 3-phase track	1-phase track 2-phase track 3-phase track
Colour	Black/White	Black/White		Black/White	Black/White

Optical Accessories





Titans T1 series

Model	KS-T1-B-5012	KS-T1-B-6615		KS-T1-B-7425	KS-T1-B-9035
Product Photo					
Dimension(mm)					
Wattage	12W	15W/20W		25W/30W	35W/40W
CCT	3000K/3500K/4000K	3000K/3500K/4000K		3000K/3500K/4000K	3000K/3500K/4000K
CRI	>90	>90		>90	>90
Beam Angle	18°/24°/36°/50°	12°/18°/22°/36°		15°/24°/36°	20°/24°/36°
Lumen	860-982LM	1018-1885LM		2041-2491LM	2053-3793LM
IP	IP 20	IP 20		IP 20	IP 20
Dimming	DALI	DALI		DALI	DALI
Accessory	Honeycomb Filter Stripped Glass Fabric Glass	Honeycomb Filter Stripped Glass Fabric Glass		Honeycomb Filter Stripped Glass Fabric Glass	
Installation	1-phase track 2-phase track 3-phase track	1-phase track 2-phase track 3-phase track		1-phase track 2-phase track 3-phase track	1-phase track 2-phase track 3-phase track
Colour	Black/White	Black/White		Black/White	Black/White



Optical Accessories













Titans T1 series





Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
KS-T1-B-5012	12W	36V	300mA	90	2700K	18°	1112lm	860lm	ON-OFF
						24°	1112lm	906lm	
						36°	1112lm	906lm	
						50°	1112lm	884lm	
	12W	36V	300mA	90	3000K	18°	1155lm	894lm	ON-OFF
						24°	1155lm	939lm	
						36°	1155lm	939lm	
						50°	1155lm	919lm	
	12W	36V	300mA	90	4000K	18°	1209lm	935lm	ON-OFF
						24°	1209lm	982lm	
						36°	1209lm	982lm	
						50°	1209lm	961lm	






Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
KS-T1-B-6615	15W	36V	350mA	90	2700K	12°	1297lm	1118lm	ON-OFF DALI
						18°	1297lm	1154lm	
						22°	1297lm	1018lm	
						36°	1297lm	1158lm	
	15W	36V	350mA	90	3000K	12°	1348lm	1163lm	ON-OFF DALI
						18°	1348lm	1200lm	
						22°	1348lm	1063lm	
						36°	1348lm	1204lm	
	15W	36V	350mA	90	4000K	12°	1411lm	1217lm	ON-OFF DALI
						18°	1411lm	1256lm	
						22°	1411lm	1117lm	
						36°	1411lm	1260lm	
KS-T1-B-6620	20W	36V	500mA	90	2700K	12°	1854lm	1503lm	ON-OFF DALI
						18°	1854lm	1646lm	
						22°	1854lm	1624lm	
						36°	1854lm	1733lm	
	20W	36V	500mA	90	3000K	12°	1926lm	1562lm	ON-OFF DALI
						18°	1926lm	1710lm	
						22°	1926lm	1688lm	
						36°	1926lm	1801lm	
	20W	36V	500mA	90	4000K	12°	2016lm	1634lm	ON-OFF DALI
						18°	2016lm	1789lm	
						22°	2016lm	1766lm	
						36°	2016lm	1885lm	




Titans T1 series



	Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	KS-T1-B-7425	25W	36V	600mA	90	2700K	15° 24° 36°	2225lm 2225lm 2225lm	2041lm 2076lm 2134lm	ON-OFF DALI
		25W	36V	600mA	90	3000K	15° 24° 36°	2311lm 2311lm 2311lm	2120lm 2157lm 2217lm	ON-OFF DALI
		25W	36V	600mA	90	4000K	15° 24° 36°	2419lm 2419lm 2419lm	2213lm 2257lm 2320lm	ON-OFF DALI
	KS-T1-B-7430	30W	36V	800mA	90	2700K	15° 24° 36°	2595lm 2595lm 2595lm	2228lm 2290lm 2176lm	ON-OFF DALI
		30W	36V	800mA	90	3000K	15° 24° 36°	2696lm 2696lm 2696lm	2315lm 2380lm 2261lm	ON-OFF DALI
		30W	36V	800mA	90	4000K	15° 24° 36°	2822lm 2822lm 2822lm	2423lm 2491lm 2366lm	ON-OFF DALI

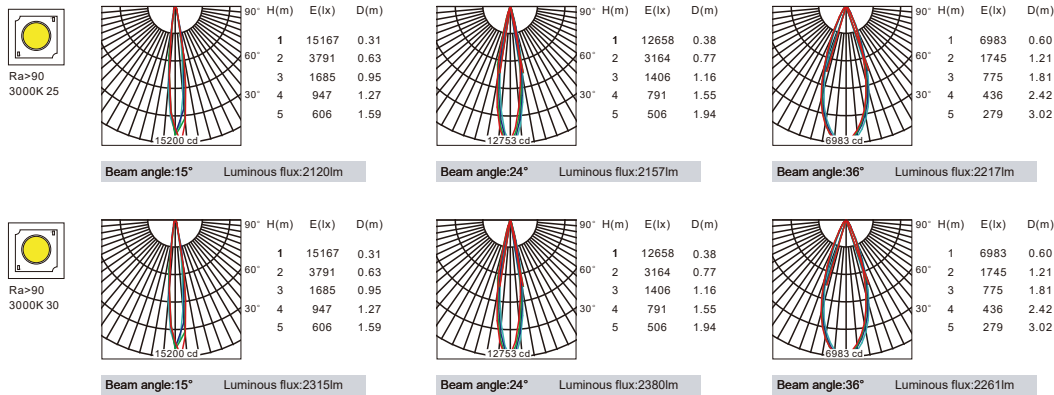

	Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	KS-T1-B-9035	35W	36V	900mA	90	2700K	20° 24° 36°	2966lm 2966lm 2966lm	2393lm 2524lm 2053lm	ON-OFF DALI
		35W	36V	900mA	90	3000K	20° 24° 36°	3081lm 3081lm 3081lm	2486lm 2622lm 2964lm	ON-OFF DALI
		35W	36V	900mA	90	4000K	20° 24° 36°	3225lm 3225lm 3225lm	2602lm 2744lm 3102lm	ON-OFF DALI
	KS-T1-B-9040	40W	36V	1000mA	90	2700K	20° 24° 36°	3708lm 3708lm 3708lm	2991lm 3453lm 3488lm	ON-OFF DALI
		40W	36V	1000mA	90	3000K	20° 24° 36°	3852lm 3852lm 3852lm	3108lm 3588lm 3624lm	ON-OFF DALI
		40W	36V	1000mA	90	4000K	20° 24° 36°	4032lm 4032lm 4032lm	3253lm 3755lm 3793lm	ON-OFF DALI

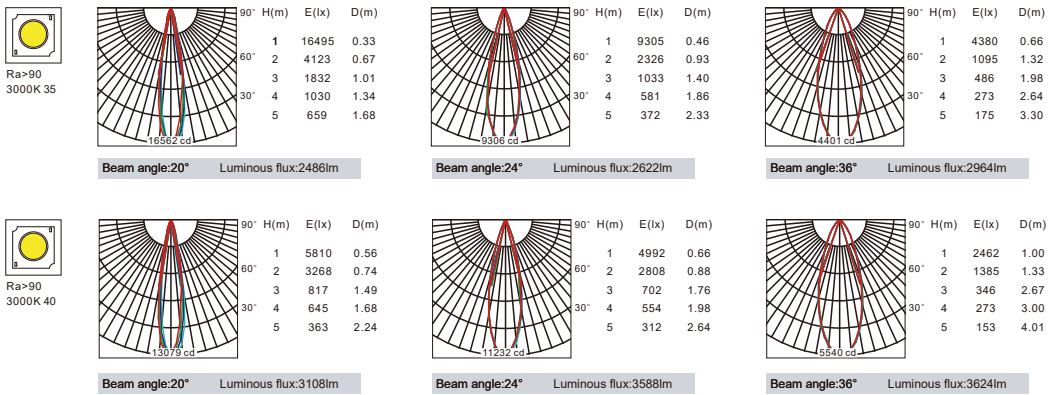




T2 series



Being elegant in appearance with built-in driver design its optical performance is outstanding. Mechanical performance is good with 350° rotation and 90° tilt to adjust light direction flexibly.

Model	KAS-T2-66	KAS-T2-80	KAS-T2-80
Product Photo			
Dimension(mm)			
Wattage	10W	15W	25W
CCT	2700K-5000K	2700K-5000K	2700K-5000K
CRI	> 90	> 90	> 90
Beam Angle	15°/24°/36°	15°/24°/36°	15°/24°/36°
Lumen	LM80	LM80	LM80
IP	IP20	IP20	IP20
Dimming	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI	TRIAC/1-10V/DALI
Accessory	Honeycomb Filter Stripped Glass Fabric Glass	Honeycomb Filter Stripped Glass Fabric Glass	Honeycomb Filter Stripped Glass Fabric Glass
Colour	Black/White	Black/White	Black/White


T2 series

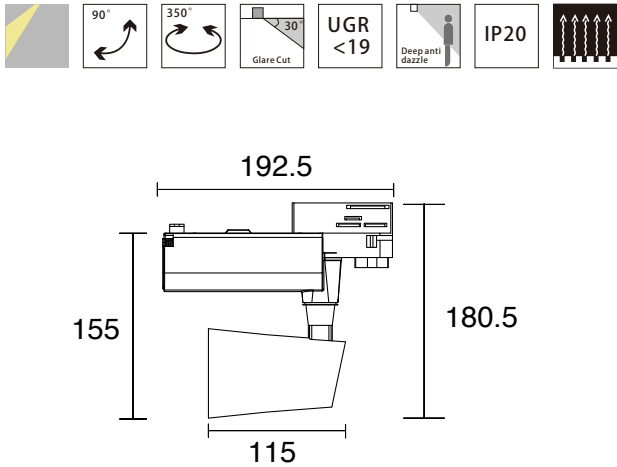

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	10W	36V	250mA	90	2700K	15°	965lm	826lm	ON-OFF DALI
						24°	965lm	780lm	
						36°	965lm	776lm	
	10W	36V	250mA	90	3000K	15°	1015lm	869lm	ON-OFF DALI
						24°	1015lm	821lm	
						36°	1015lm	817lm	
	10W	36V	250mA	90	4000K	15°	1077lm	922lm	ON-OFF DALI
						24°	1077lm	871lm	
						36°	1077lm	866lm	

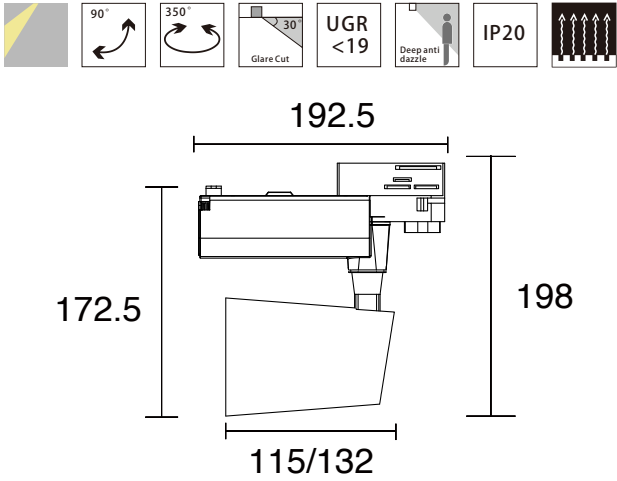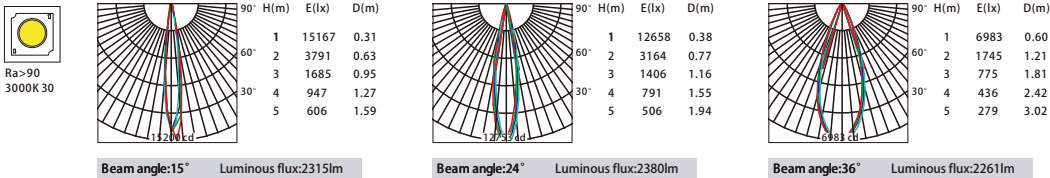

Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	15W	36V	350mA	90	2700K	20°	1314lm	1068lm	ON-OFF DALI
						24°	1314lm	1038lm	
						36°	1314lm	1017lm	
	15W	36V	350mA	90	3000K	20°	1383lm	1125lm	ON-OFF DALI
						24°	1383lm	1038lm	
						36°	1383lm	1017lm	
	15W	36V	350mA	90	4000K	20°	1473lm	1193lm	ON-OFF DALI
						24°	1473lm	1159lm	
						36°	1473lm	1136lm	
	25W	36V	600mA	90	2700K	20°	2558lm	2041lm	ON-OFF DALI
						24°	2558lm	2076lm	
						36°	2558lm	2134lm	
	25W	36V	600mA	90	3000K	20°	2657lm	2120lm	ON-OFF DALI
						24°	2657lm	2157lm	
						36°	2657lm	2217lm	
	25W	36V	600mA	90	4000K	20°	2781lm	2213lm	ON-OFF DALI
						24°	2781lm	2257lm	
						36°	2781lm	2320lm	

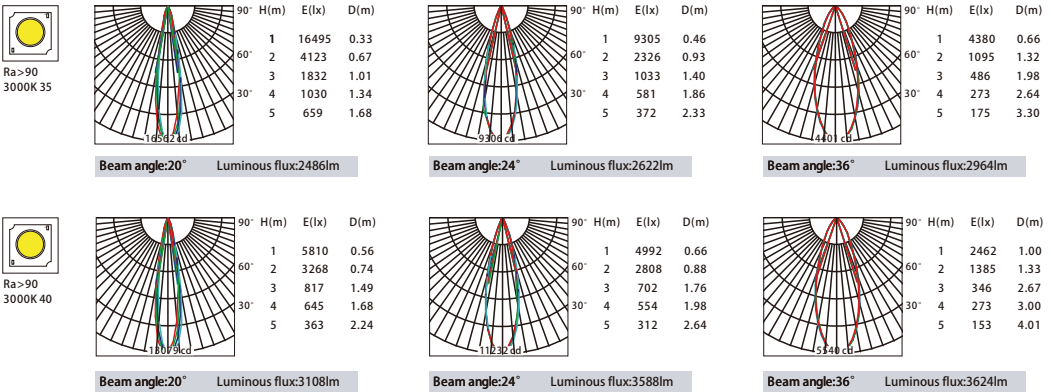



T2 series

Being elegant in appearance with built-in driver design its optical performance is outstanding. Mechanical performance is good with 350° rotation and 90° tilt to adjust light direction flexibly.


Model	K-T3-A-80	K-T3-A-80
Product Photo		
Dimension(mm)		
Wattage	25W/30W	25W/30W
CCT	3000K/3500K/4000K	3000K/3500K/4000K
CRI	>90	>90
Beam Angle	15°/24°/36°/50°	15°/24°/36°/50°
Lumen	1735-2839LM	1735-2839LM
IP	IP 20	IP 20
Installation	1-phase track 2-phase track 3-phase track	1-phase track 2-phase track 3-phase track
Colour	Black/White	Black/White

Optical Accessories




Honeycomb Filter Stripped Glass Fabric Glass

T2 series



Model	Power	LED voltage	LED Current	CRI	CCT	Beam Angle	LED Output	System output	Dimming Type
	25W	36V	600mA	90	2700K	15°	2452lm	1924lm	ON-OFF
						24°	2452lm	1735lm	
						36°	2452lm	1747lm	
						50°	2452lm	1821lm	
						15°	2593lm	2035lm	
	25W	36V	600mA	90	3000K	24°	2593lm	1835lm	ON-OFF
						36°	2593lm	1848lm	
						50°	2593lm	1821lm	
						15°	2805lm	2201lm	
						24°	2805lm	1985lm	
	25W	36V	600mA	90	4000K	36°	2805lm	1999lm	ON-OFF
						50°	2805lm	1969lm	
						15°	3022lm	2254lm	
						24°	3022lm	2545lm	
						36°	3022lm	2592lm	
	30W	36V	700mA	90	2700K	50°	3022lm	2593lm	ON-OFF
						15°	3144lm	2345lm	
						24°	3144lm	2648lm	
						36°	3144lm	2697lm	
						50°	3144lm	2698lm	
	30W	36V	700mA	90	3000K	15°	3192lm	2380lm	ON-OFF
						24°	3192lm	2688lm	
						36°	3192lm	2738lm	
						50°	3192lm	2739lm	
						15°	3192lm	2739lm	

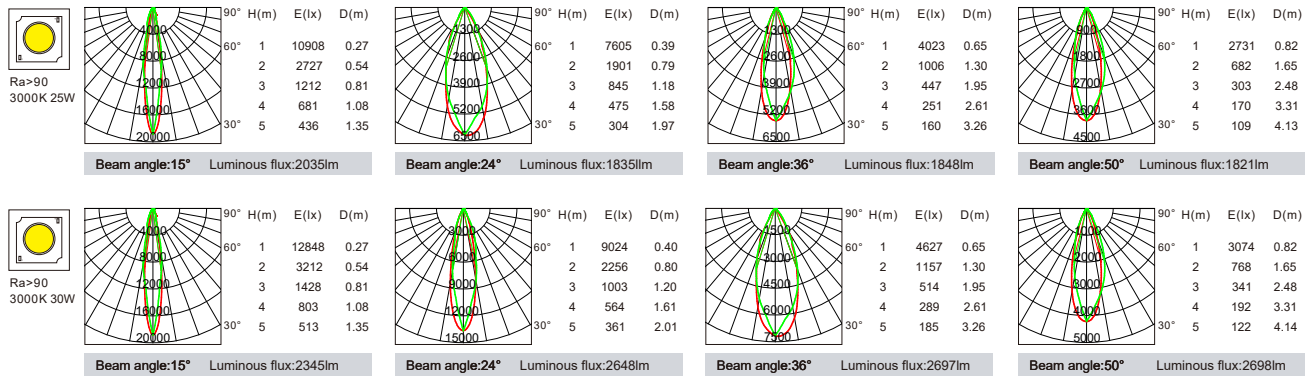

Contact details

IINNO Ltd

Unit 7, 8/F., Tower B,
83 King Lam Street,
Lai Chi Kok, Kowloon,
Hong Kong

Tel: +852 2134 9906

+86 (0)769 23010151/2

M: +86 13922905402

Email: sales@iinno-lighting.com

www.iinno-lighting.com

