

Emergency Lighting solutions

Designing your lighting solutions



GUARD MINI

[In concept stage]




- ✓ 120lm
- ✓ IP65

Product Features

- Polycarbonate construction
- Built in easy-fit gear tray
- Maintained or non-maintained use
- 1 hour/3 hours emergency
- Self test function available

DIMENSION

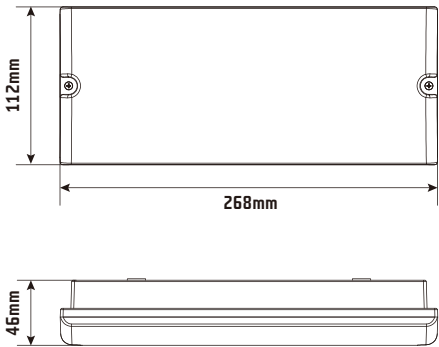

Specification

Model No.	SGMN
Voltage	AC220-240V 50/60Hz
Input Power	Max. 2.5W
Emergency Power	0.8W
Lumen	120lm
EM Duration	1H/3H
Color Temp	6500K
Ambient Temp	0-45°C
Function	Maintained/Non-Maintained Standard/Self Test
Battery	LiFePO4 3.2V 1.1Ah
Dimension	268x112x46mm
IP Grade	IP65
Material	PC
Mounting	Surface / Recessed Mounting
Certificate	CE/UKCA/RoHS
Warranty	4 years(battery 2 years)



GUARD PLUS



Recessed kit SGUP-RK



Exit diffuser kit SGUP-ED


- ✓ 150lm, 3 hours
- ✓ IP65, IK07



Product Features

- Polycarbonate construction
- Built in easy-fit gear tray
- Maintained or non-maintained use
- 3 hours emergency
- Self test function available
- AC110V yellow version available

DIMENSION

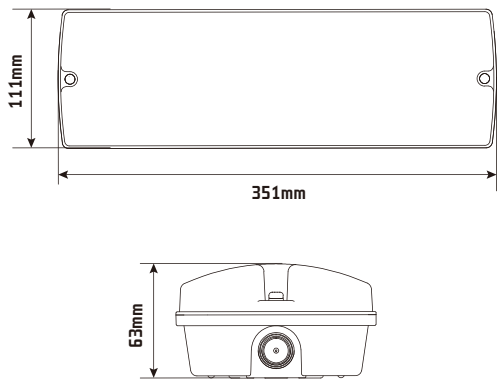

Specification

Model No.	SGUP
Voltage	AC220-240V AC110V
Input Power	Max. 3.5W
Emergency Power	1W
Lumen	150lm
EM duration	3 hours
Color Temp	6500K
Ambient Temp	0-40°C (Ni-Cd) 0-45°C (LiFePO4)
Function	Maintained/Non-Maintained Standard/Self Test
Battery	LiFePO4 3.2V 1.5Ah Ni-Cd 3.6V 1.5Ah
Dimension	351x111x63mm
IP Grade	IP65
Material	PC
Mounting	Surface/Recessed Mounting
Certificate	CB/CE/UKCA/RoHS
Warranty	LiFePO4: 4 years(battery 2 years) Ni-Cd: 3 years(battery 1 year)



GUARD PRO

(In concept stage)




- ✓ 300lm, 3 hours
- ✓ IP65, IK07



Product Features

- Polycarbonate construction
- Built in easy-fit gear tray
- Maintained or non-maintained use
- 3 hours emergency
- Self test function available
- AC110V yellow version available

DIMENSION

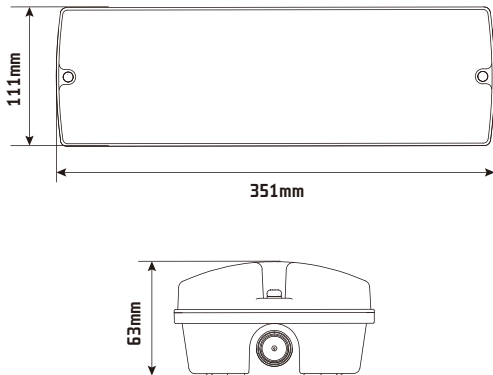

Specification

Model No.	SGU0	
Voltage	AC220-240V	AC110V
Input Power	Max. 3.5W	
Emergency Power	1W	
Lumen	150lm	
EM duration	3 hours	
Color Temp	6500K	
Ambient Temp	0-45°C	
Function	Maintained/Non-Maintained Standard/Self Test	
Battery	LiFePO4 3.2V 3.3Ah	
Dimension	351x111x63mm	
IP Grade	IP65	
Material	PC	
Mounting	Surface/Recessed Mounting	
Certificate	CB/CE/UKCA/RoHS	
Warranty	4 years(battery 2 years)	



GUARD MAX




- ✓ 1000lm/1500lm selectable output
- ✓ IP66, IK08

Product Features

- 1000lm/1500lm selectable output
- DC48V CBS version optional
- Polycarbonate construction
- Built in easy-fit gear tray
- Self test version available
- IP66, IK08

DIMENSION

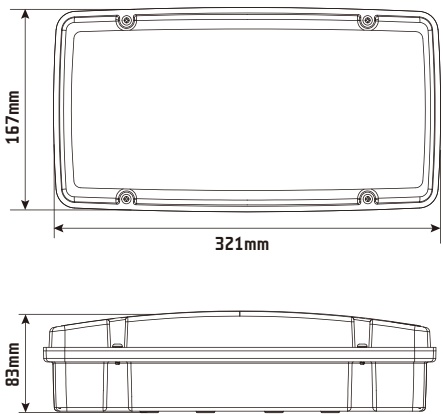

Specification

Model No.	SGUM	
Voltage	AC220-240V	50/60Hz
Input Power	Max. 5W	
Emergency Power	6W/10W	
Lumen	1000lm/1500lm selectable	
EM Duration	3 hours	
Color Temp	6500K	
Ambient Temp	0-45°C	
Function	Non-Maintained Standard/Self test	
Battery	LiFePO4 6.4V 6.6Ah	
Dimension	321x167x83mm	
IP Grade	IP66	
Material	PC	
Mounting	Surface mounting	
Certificate	CB/CE/UKCA/RoHS	
Warranty	4 years(battery 2 years)	



SPOT



Open area



Corridor




- ✓ Foldable converter
- ✓ Interchangeable lens

Product Features

- Open area/corridor lens interchangeable
- Open area 120lm, corridor 130lm
- Driver + battery foldable for shallow ceiling voids
- Self test function available

DIMENSION

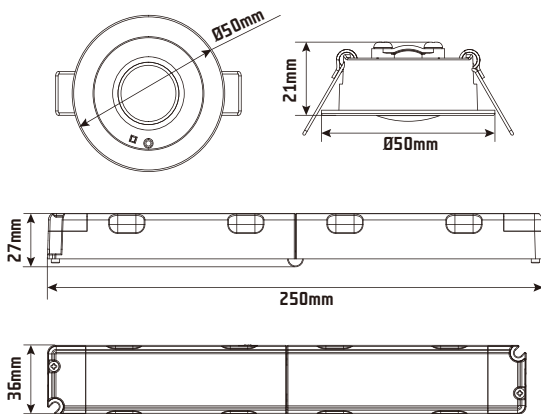


Specification

Model No.	SSPD
Voltage	AC220-240V 50/60Hz
Input Power	Max. 1W
Emergency Power	1W
Lumen	Open area - 120lm Corridor - 130lm
EM Duration	3 hours
Color Temp	6500K
Ambient Temp	0-45°C
Function	Non-Maintained Standard/Self Test
Battery	LiFePO4 3.2V 1.5Ah
Dimension	Lamp head: Ø50x21mm Cutout: 43-44mm Converter: 250x27x36mm
IP Grade	IP20
Material	PC
Mounting	Recessed mounting
Certificate	CB/CE/UKCA/RoHS
Warranty	4 years(battery 2 years)



SPITFIRE PRO

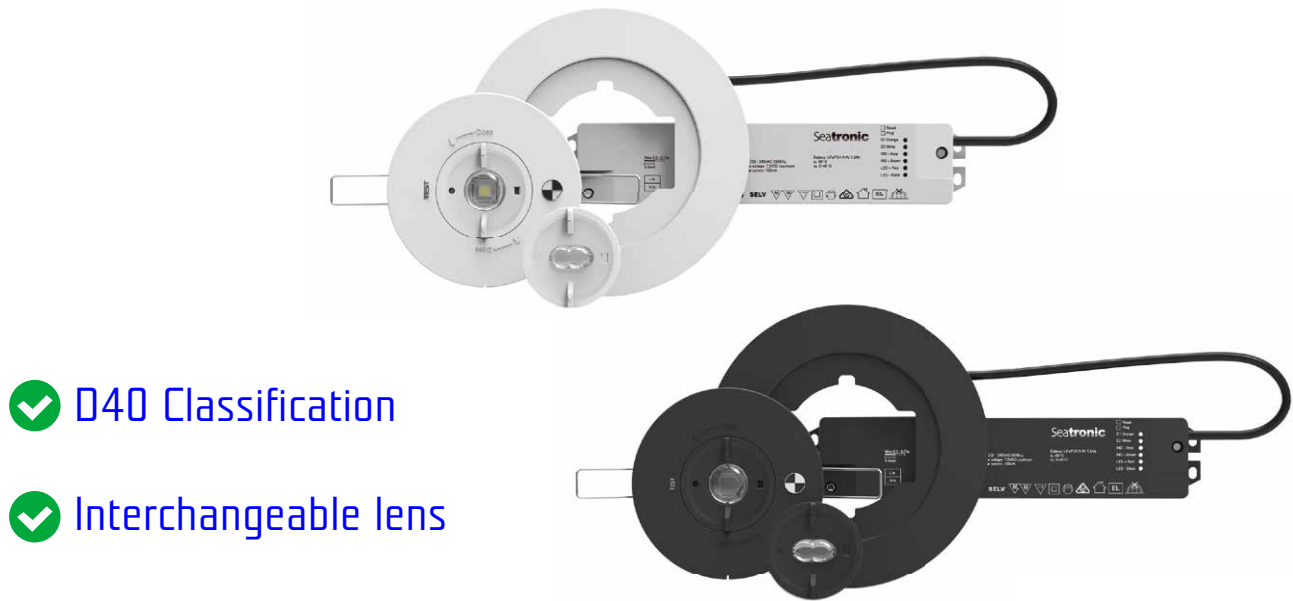


- ✔ D40 Classification
- ✔ Interchangeable lens

Product Features

- Open area/corridor lens interchangeable
- Open area 280lm, corridor 230lm
- With Ø145mm large ring
- Australia D40 classification

DIMENSION

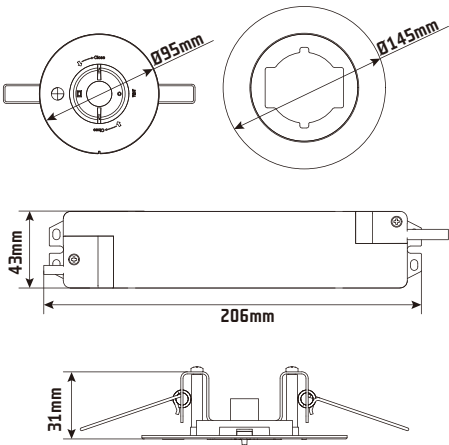

Specification

Model No.	SSPP
Voltage	AC220-240V 50/60Hz
Input Power	Max. 3.2W
Emergency Power	2W
Lumen	Open area - 280 lumens Corridor - 230 lumens
EM Duration	3 hours
Color Temp	6500K
Ambient Temp	0-45°C
Function	Non-Maintained
Battery	LiFePO4 6.4V 1.5Ah
Dimension	Lamp head: Ø95X31mm Converter: 206x43x23mm Big ring: Ø145mm
IP Grade	IP20
Material	PC
Mounting	Recessed mounting
Certificate	CE/UKCA/RCM/RoHS/AS2293
Classification	Open area: C0 D40, C90 D40 Corridor: C0 D40
Warranty	4 years(battery 2 years)



SPITFIRE PLUS




- ✔ D63 Classification
- ✔ Interchangeable lens

Product Features

- Open area/corridor lens interchangeable
- Open area 330lm, corridor 300lm
- With Ø145mm large ring
- Australia D63 classification
- Easy to replace battery
- Self test function available

DIMENSION

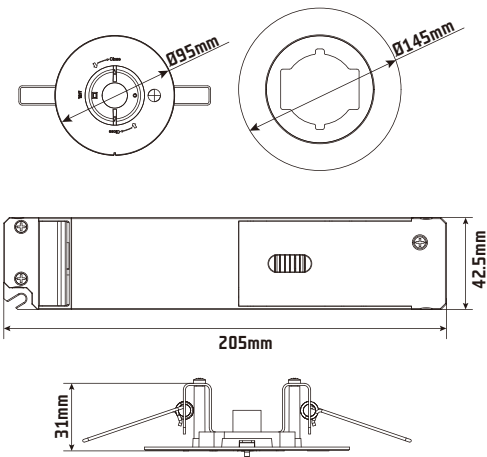

Specification

Model No.	SSPU
Voltage	AC220-240V 50/60Hz
Input Power	Max. 1.6W
Emergency Power	2.3W
Lumen	Open area - 330 lumens Corridor - 300 lumens
EM Duration	3 hours
Color Temp	6500K
Ambient Temp	0-45°C
Function	Non-Maintained Standard/Self Test
Battery	LiFePO4 3.2V 3.3Ah
Dimension	Lamp head: Ø95x31mm Converter: 205x42.5x23mm Big ring: Ø145mm
IP Grade	IP20
Material	PC
Mounting	Recessed mounting
Certificate	CE/UKCA/RCM/RoHS/AS2293
Classification	Open area: C0 D63, C90 D63 Corridor: C0 D63
Warranty	4 years(battery 2 years)



ESCAPE SQUARE




- ✓ Interchangeable lens
- ✓ IP65 for outdoor use

Product Features

- Open area/corridor lens interchangeable
- Open area 280lm, corridor 230lm
- Australia D40 class
- Self test function available
- IP65

DIMENSION

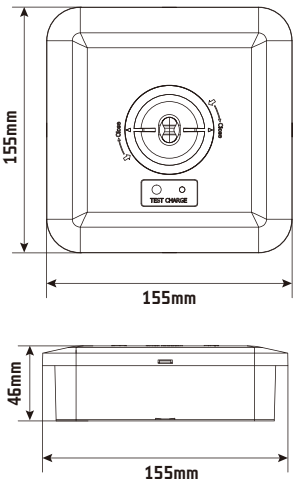

Specification

Model No.	SESS
Voltage	AC220-240V 50/60Hz
Input Power	Max. 1.6W
Emergency Power	2W
Lumen	Open area - 280lm Corridor - 230lm
EM Duration	3 hours
Color Temp	6500K
Ambient Temp	0-45°C
Function	Non-Maintained Standard/Self Test
Battery	LiFePO4 3.2V 3.3Ah
Dimension	155x155x46mm
IP Grade	IP65
Material	PC
Mounting	Surface mounting
Certificate	CB/CE/UKCA/RCM/RoHS/AS2293
Classification	Open area: C0 D40, C90 D40 Corridor: C0 D40
Warranty	4 years(battery 2 years)



ESCAPE ROUND




- ✓ Interchangeable lens
- ✓ IP65 for outdoor use

Product Features

- Open area/corridor lens interchangeable
- Open area 280lm, corridor 230lm
- Australia D40 class
- Self test function available
- IP65

DIMENSION

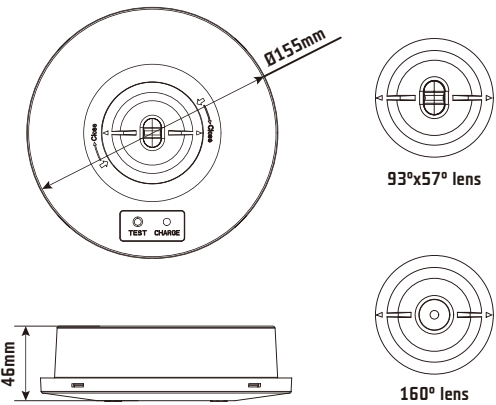

Specification

Model No.	SESR
Voltage	AC220-240V 50/60Hz
Input Power	Max. 1.6W
Emergency Power	2W
Lumen	Open area - 280lm Corridor - 230lm
EM Duration	3 hours
Color Temp	6500K
Ambient Temp	0-45°C
Function	Non-Maintained Standard/Self Test
Battery	LiFePO4 3.2V 3.3Ah
Dimension	Ø155x46mm
IP Grade	IP65
Material	PC
Mounting	Surface mounting
Certificate	CB/CE/UKCA/RCM/RoHS/AS2293
Classification	Open area: C0 D40, C90 D40 Corridor: C0 D40
Warranty	4 years(battery 2 years)



FOCUS


(In concept stage)

- ✓ D40/D63 two options
- ✓ Interchangeble lens

Product Features

- Open area/corridor lens interchangeable
- Australia D40/D63 two options
- Self test function available
- Surface mounting kit available
- D170mm ring available

DIMENSION

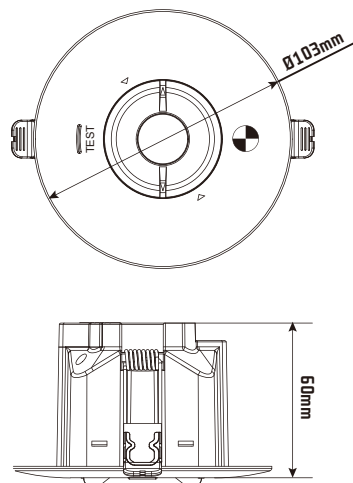

Specification


Model No.	SFOC
Voltage	AC220-240V 50/60Hz
Input Power	Max. 3W/Max. 6W
Emergency Power	2W/4W
Lumen	280lm/2W (Open area) 330lm/4W (Corridor)
EM Duration	3 hours
Color Temp	6500K
Ambient Temp	0-45°C
Function	Non-Maintained Standard/Self Test
Battery	LiFePO4 3.2V 1.5Ah LiFePO4 3.2V 3.3Ah
Dimension	Lamp head: $\varnothing 103\text{mm}$ Big ring: $\varnothing 170\text{mm}$
IP Grade	IP20
Material	PC
Mounting	Recessed/Surface mounting
Certificate	CB/CE/UKCA/RCM/RoHS/AS2293
Classification	D40/ D63
Warranty	4 years(battery 2 years)



POWER BEAM

✓ 500lm/1000lm for 2 heads


✓ IK07, IP65

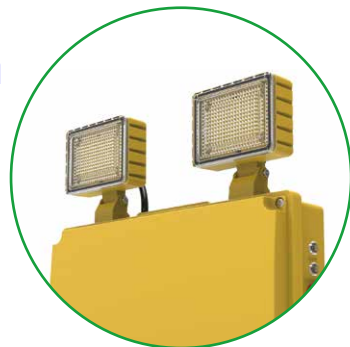

Product Features

- Robust and modern design
- 500lm/1000lm for 2 heads
- Narrow or wide 2 beam angle options
- Self test function available
- AC110V yellow version available

DIMENSION

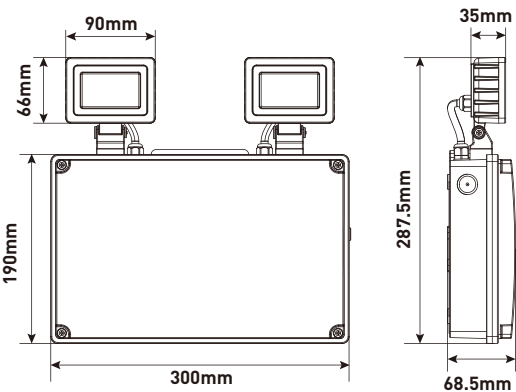

Specification

Model No.	SPBM
Voltage	AC220-240V AC110V
Input Power	Max. 3W/Max. 6W
Emergency Power	5W/9.5W
Lumen	500lm/1000lm
EM Duration	3 hours
Color Temp	6500K
Ambient Temp	0-45°C
Function	Non-Maintained Standard/Self Test
Battery Type	LiFePO4 6.4V 3.3Ah (2.5W) LiFePO4 6.4V 6.6Ah (4.5W)
Dimension	300x287.5x68.5mm
IP Grade	IP65
Material	PC
Mounting	Wall mounting
Certificate	CB/CE/RCM/RoHS/AS2293
Classification	2.5W: C0 D63, C90 D50 4.5W: C0 D100, C90 D125
Warranty	4 years(battery 2 years)



POWER LITE


- ✓ 150lm/300lm for 2 heads
- ✓ Narrow or wide beam angles



Product Features

- Simple and modern style
- 150lm/300lm for 2 heads
- Narrow or wide beam angles options
- Self test function available
- IP20

DIMENSION

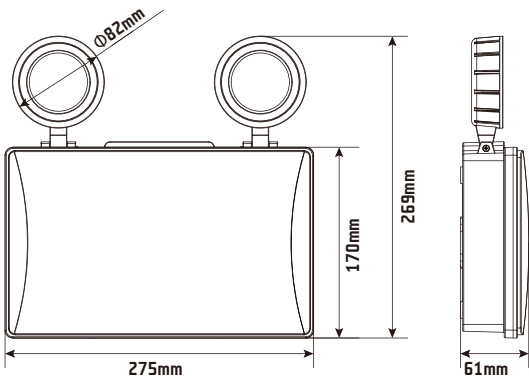

Specification

Model No.	SP0L
Voltage	AC220-240V 50/60Hz
Input Power	Max. 1.6W
Emergency Power	1.1W/2.3W
Lumen	150lm/300lm
EM Duration	3 hours
Color Temp	6500K
Ambient Temp	0-45°C
Function	Non-Maintained Standard/Self Test
Battery Type	LiFePO4 3.2V 1.5Ah (1.1W) LiFePO4 3.2V 3.3Ah (2.2W)
Dimension	275x269x61mm
IP Grade	IP20
Material	PC
Mounting	Wall mounting
Certificate	CB/CE/UKCA/RoHS
Warranty	4 years(battery 2 years)





Suspension kit SVEN-SK



Rod kit SVEN-RK



Flag kit SVEN-FK

Product Features

- Multi-fix method: ceiling, wall, flag, suspension, rod mounting
- Viewing distance: 24M(AU)
- LED indicator & test button 2 in 1
- Self test function available








Specification

Model No.	SVEN
Voltage	AC220-240V 50/60Hz
Input Power	Max. 2.2W
Emergency Power	1W
Viewing Distance	24M(AU)
EM Duration	3 hours
Color Temp	6500K
Ambient Temp	0-45°C
Function	Maintained/Non-Maintained Standard/Self Test
Battery	LiFePO4 3.2V 1.5Ah
Dimension	325x206x79mm(Ceiling)
IP Grade	IP20
Material	PC
Mounting	Ceiling/Wall/Flag Suspension/Rod mounting
Certificate	RCM/AS2293
Classification	C0 E2, C90 E1.6
Warranty	4 years(battery 2 years)



Installation & Dimension

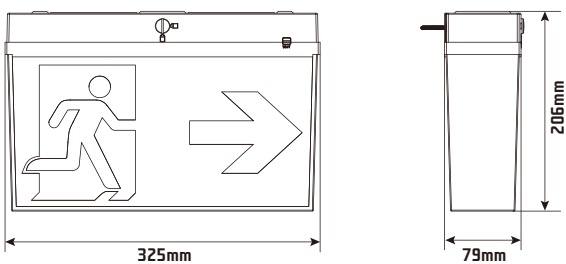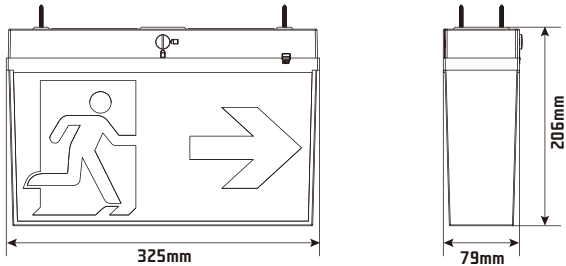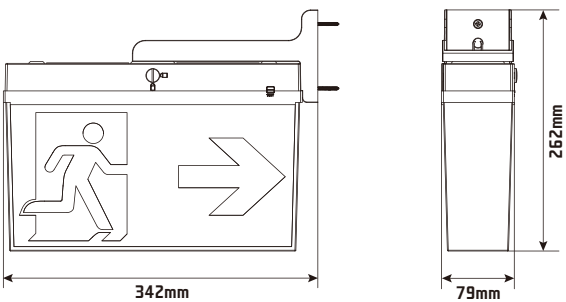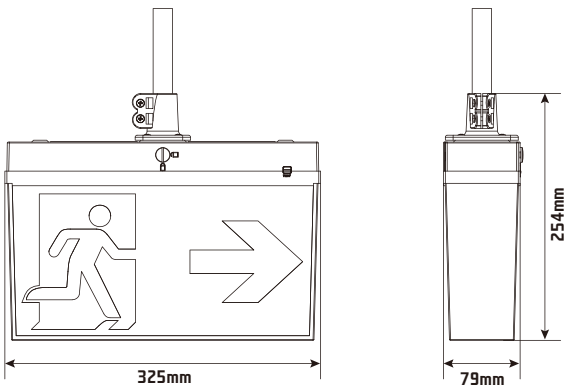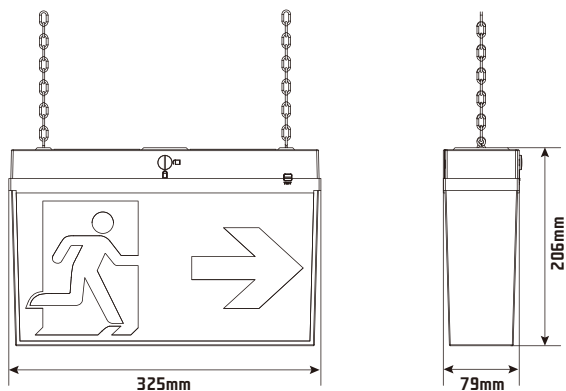

JUMBO

[In concept stage]



Suspension kit SJUM-SK




Product Features

- Multi-fix method: ceiling, wall, suspension mounting
- Viewing distance: 40M(AU)
- LED indicator & test button
- Self test function available

Specification

Model No.	SJUM
Voltage	AC220-240V 50/60Hz
Input Power	Max. 3W
Emergency Power	2W
Viewing Distance	40M(AU)
EM Duration	3 hours
Color Temp	6500K
Ambient Temp	0-45°C
Function	Maintained/Non-Maintained Standard/Self Test
Battery	LiFePO4 6.4V 1.5Ah
Dimension	533x324x38mm(Ceiling)
IP Grade	IP20
Material	Steel body + PC diffuser
Mounting	Ceiling/Wall/ Suspension mounting
Certificate	RCM/AS2293
Classification	E6.3 D12.5
Warranty	4 years(battery 2 years)

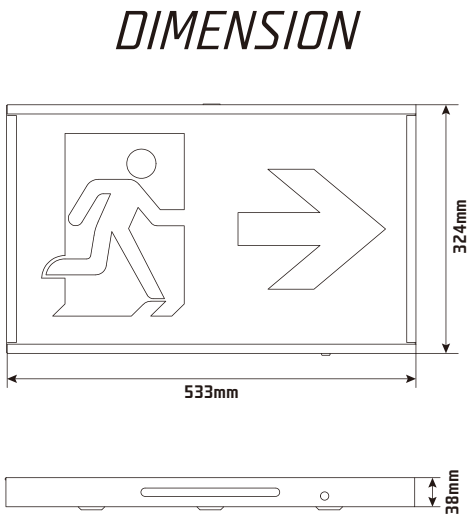

RAZOR



Suspension kit SRAZ-SK













Recessed kit SRAZ-RK



Flag kit SRAZ-FK

Installation & Dimension

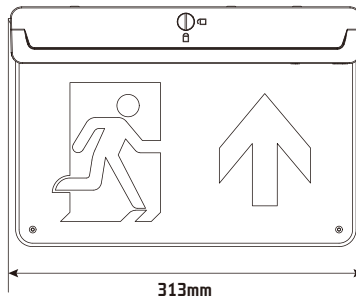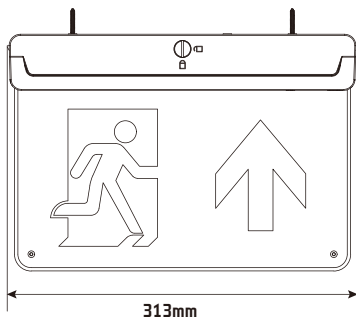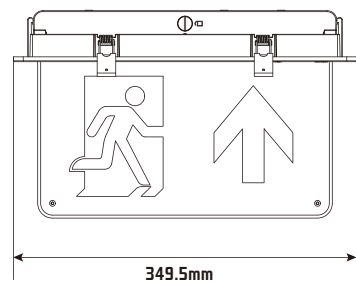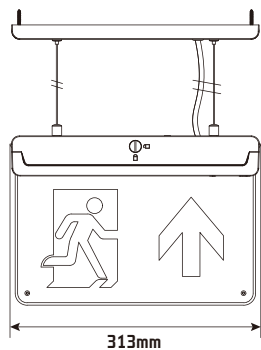

Product Features

- Multi-fix method: ceiling, recessed, suspension, flag, wall mounting
- Viewing distance: 30M(EU)
- LED indicator & test button
- Self test function available

Specification


Model No.	SRAZ
Voltage	AC220-240V 50/60Hz
Input Power	Max. 2.2W
Emergency Power	0.8W
Viewing Distance	30M(EU)
EM Duration	3 hours
Color Temp	6500K
Ambient Temp	0-45°C
Function	Maintained/Non-Maintained Standard/Self Test
Battery	LiFePO4 3.2V 1.1Ah
Dimension	313x212x42mm(Surface)
IP Grade	IP20
Material	PC
Mounting	Ceiling/Recessed/Suspension Flag/Wall mounting
Certificate	CB/CE/UKCA/RoHS
Warranty	4 years(battery 2 years)



BLADE



Suspension kit SBLD-SK

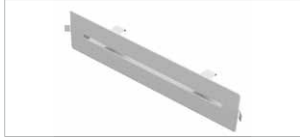

Recessed kit SBLD-RK



Flag kit SBLD-FK

Product Features

- Multi-fix method: ceiling, recessed, suspension, flag, wall mounting
- Viewing distance: 24M(AU), 30M(EU)
- LED indicator & test button
- Self test function available




Specification

Model No.	SBLD
Voltage	AC220-240V 50/60Hz
Input Power	Max. 4.7W
Emergency Power	1.2W
Viewing Distance	24M(AU)/30M(EU)
EM Duration	3 hours
Color Temp	6000K
Ambient Temp	5-45°C
Function	Maintained/Non-Maintained Standard/Self Test
Battery	LiFePO4 3.2V 1.5Ah
Dimension	310.5x210x36mm(Surface)
IP Grade	IP20
Material	PC
Mounting	Ceiling/Recessed/Suspension Flag/Wall mounting
Certificate	CB/CE/UKCA/RoHS
Warranty	4 years(battery 2 years)




Installation & Dimension

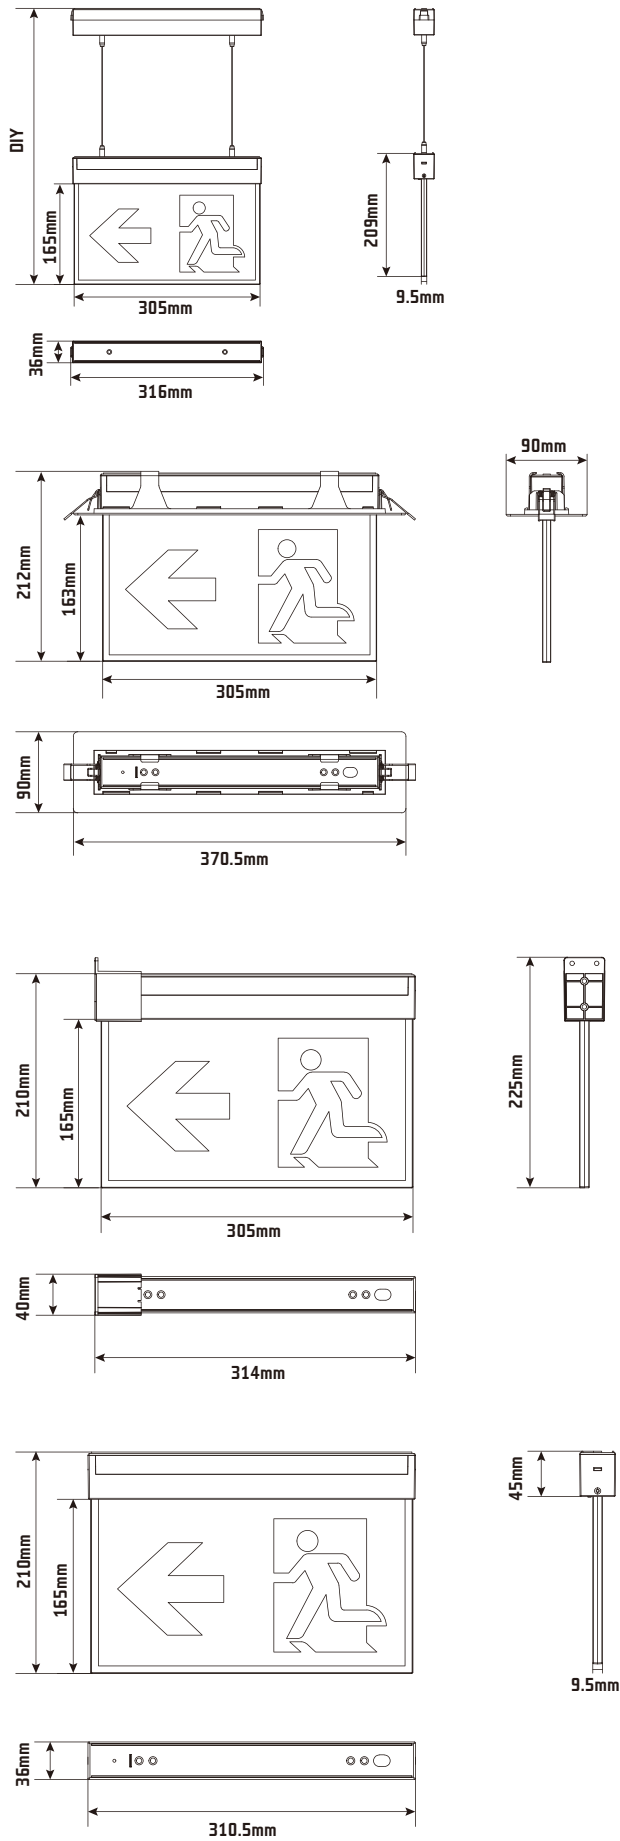

MULTI-FIX

(In concept stage)

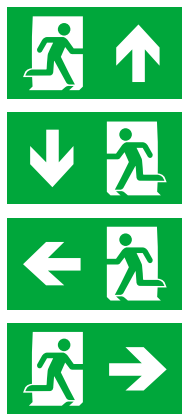

Suspension kit SMUF-SK



Recessed kit SMUF-RK



Flag mounting SMUF-FK

Product Features

- Multi-fix method: ceiling, recessed, suspension, flag, wall mounting
- Viewing distance: 30M(EU)
- LED indicator & test button
- Self test function available







Specification

Model No.	SMUF
Voltage	AC220-240V 50/60Hz
Input Power	Max. 2.2W
Emergency Power	0.8W
Viewing Distance	30M
EM Duration	3 hours
Color Temp	6500K
Ambient Temp	0-45°C
Function	Maintained/Non-Maintained Standard/Self Test
Battery	LiFePO4 3.2V 1.5Ah
Dimension	310x237x42mm(Surface)
IP Grade	IP20
Material	PC
Mounting	Ceiling/Recessed/Suspension Flag/Wall mounting
Certificate	CE/UKCA/RoHS
Warranty	4 years(battery 2 years)



Installation & Dimension

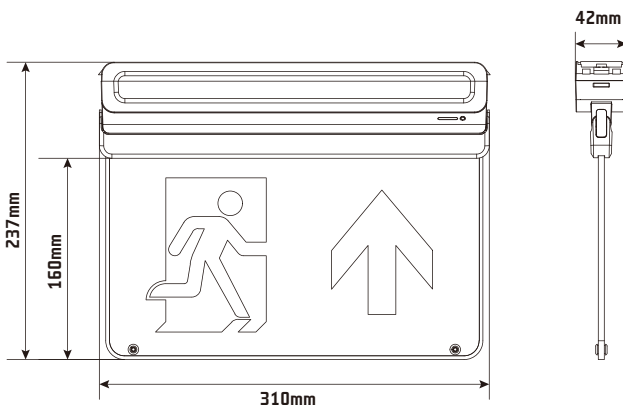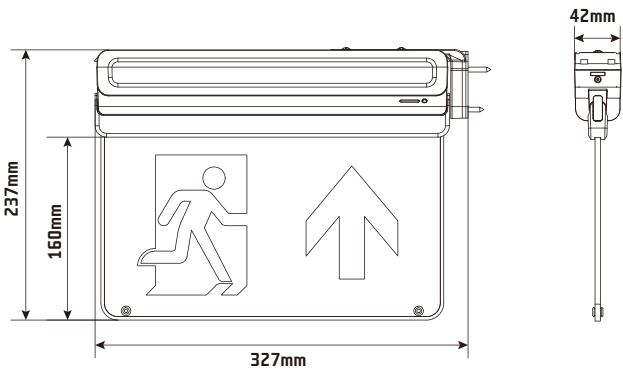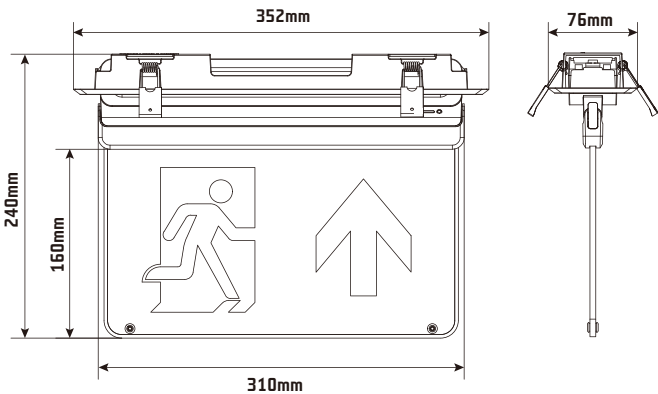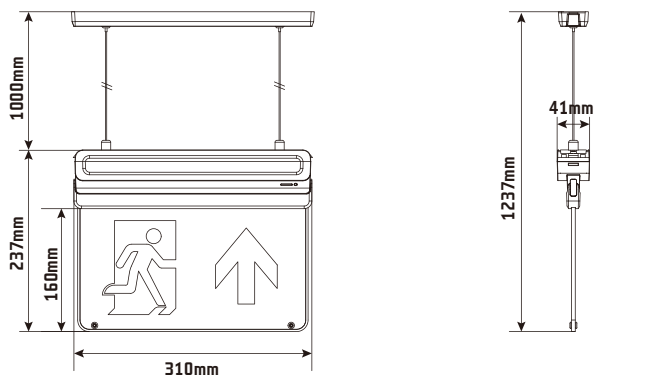

Suspension



Recessed



Flag



Ceiling



Wall






Product Features

- Ultra slim modern design
- Viewing distance: 30M(EU), 24M(AU)
- With angle adjustable down light
- Self test function available

Specification

Model No.	SCLI
Voltage	AC220-240V 50/60Hz
Input Power	Max. 3.5W
Emergency Power	1W
Viewing Distance	30M(EU)/24M(AU)
EM Duration	1H/3H/8H
Color Temp	6500K
Ambient Temp	0-45°C
Function	Maintained/Non-Maintained Standard/Self Test
Battery	LiFePO4 3.2V 1.5Ah
Dimension	330x186x30mm
IP Grade	IP20
Material	PC
Mounting	Wall mounting
Certificate	CB/CE/UKCA/RoHS
Warranty	4 years(battery 2 years)

DIMENSION

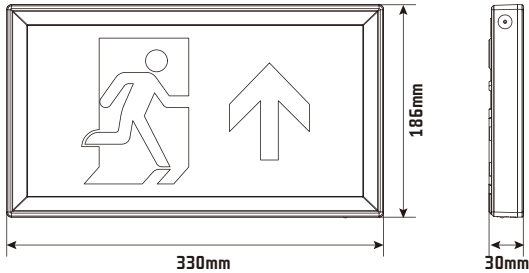

PANDORA


- ✓ Viewing distance 36M(EU), 24M(AU)
- ✓ With down light



Product Features

- Steel box + PC legend construction
- Extra down light
- 3 hours emergency duration
- Self test function available

DIMENSION

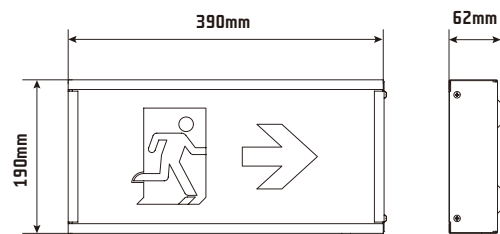

Specification

Model No.	SPAN
Voltage	AC220-240V 50/60Hz
Input Power	Max. 3W
Emergency Power	1W
Viewing Distance	36M(EU), 24M(AU)
EM duration	3 hours
Color Temp	6500K
Ambient Temp	0-45°C
Function	Maintained/Non-Maintained Standard/Self Test
Battery	LiFePO4 3.2V 1.5Ah
Dimension	390x190x62mm
IP Grade	IP20
Material	Steel box + PC legend
Mounting	Wall Mounting
Certificate	CE/UKCA/RoHS
Warranty	4 years(battery 2 years)




ECO BLADE



Product Features

- Multi-fix method: wall, flag, suspending mounting
- Viewing distance: 30M(EU)
- LED indicator & test button
- Ni-Cd battery

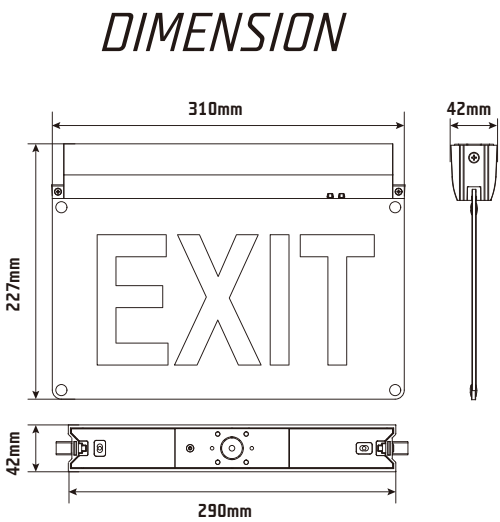


Specification

Model No.	SBLE
Voltage	AC220-240V 50/60Hz
Input Power	Max. 1.31W
Emergency Power	0.3W
Viewing Distance	30M
EM Duration	3 hours
Color Temp	6500K
Ambient Temp	0-40°C
Function	Maintained
Battery	Ni-Cd 1.2V 1Ah
Dimension	310x227x42mm(Surface)
IP Grade	IP20
Material	PC
Mounting	Wall/Flag Suspension mounting
Certificate	CB/CE/UKCA/RoHS
Warranty	2 years




EDGE

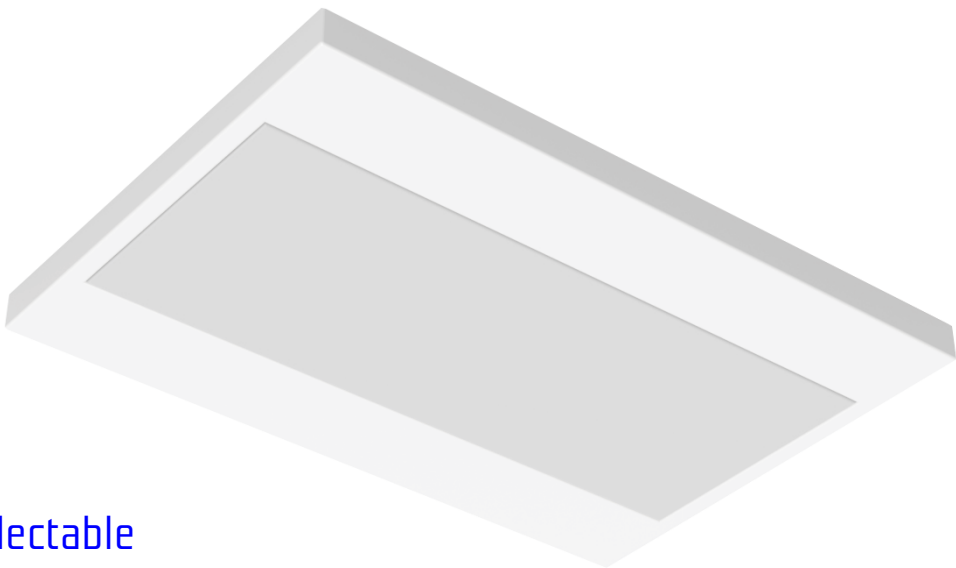

- ✓ 1-3h/2-6h selectable
- ✓ Fit for 503 recess box

Product Features


- Emergency duration selectable: 1-3h/2-6h
- Maintained & Non-Maintained selectable
- 100lm/33lm
- Ni-Cd battery 3.6V 0.6Ah/1.2Ah 2 versions
- IP40, IK06, Class II
- Wall box 503 recessed mounting

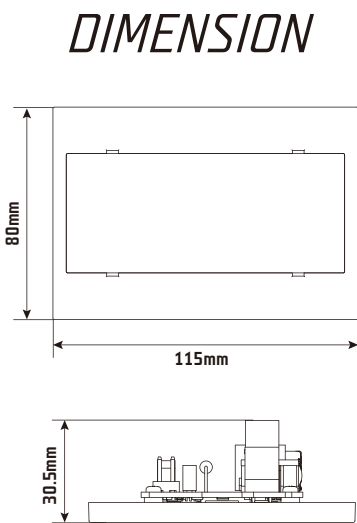

Specification

Model No.	SEDG03	SEDG06
Voltage	AC220-240V	50/60Hz
Input Power	Max. 3W	Max. 1.3W
Emergency Power	1W	0.4W
Lumen	100lm/33lm	
EM Duration	1 hour/2 hours	3 hours/6 hours
Color Temp	6500K	
Ambient Temp	0-40°C	
Function	Maintained/Non-Maintained	
Battery	Ni-Cd 3.6V/0.6Ah	Ni-Cd 3.6V/1.2Ah
Dimension	115X80X30.5mm	
IP Grade	IP40	
Material	PC	
Certificate	CE/UKCA/RoHS	
Warranty	3 years(battery 1 year)	



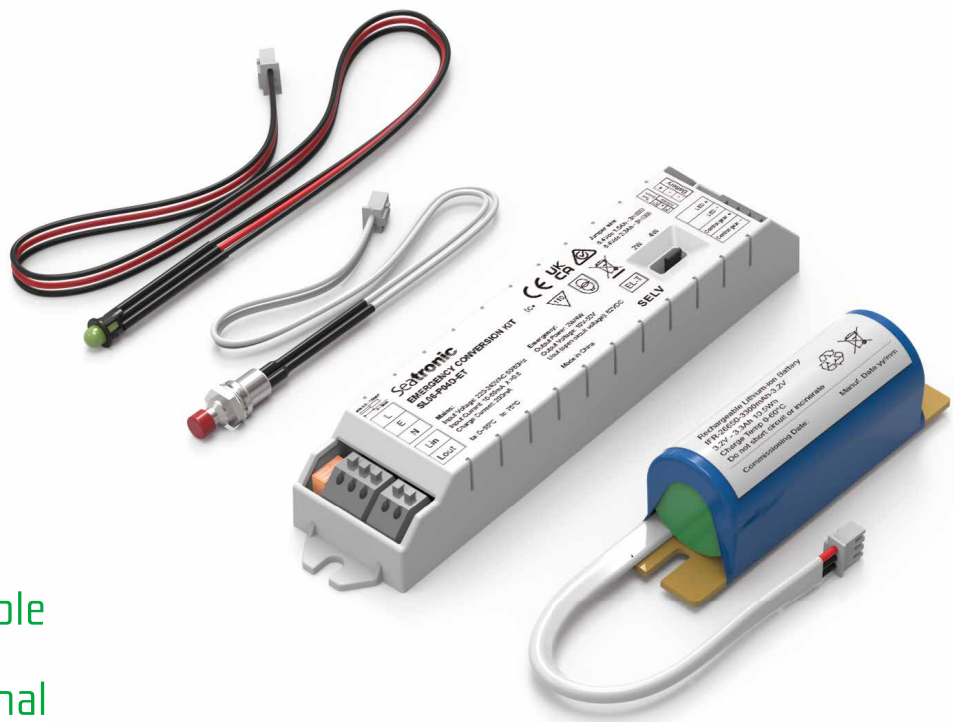


- ✔ Power selectable
- ✔ Self test optional

Product Features

- Power selectable
- With external battery
- With test button and indicator
- Self test function available

DIMENSION

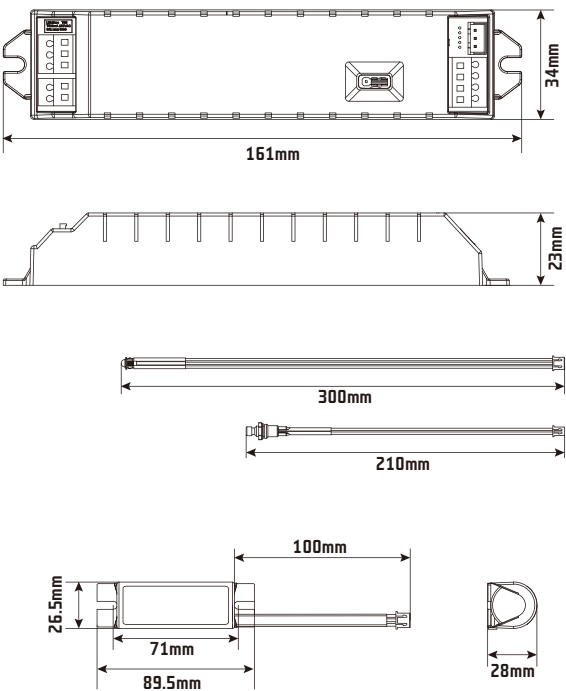


Specification

Model No.	SL06
Voltage	AC220-240V 50/60Hz
Input Power	Max. 3W
Emergency Power	1W/2W/4W
EM Duration	3 hours
Input Current	Max. 30mA
Output Voltage	DC 10-50V/50-200V
Ambient Temp	0-55°C
Function	Standard/Self Test
Battery Type	LiFePO4 3.2V 1.5Ah LiFePO4 3.2V 3.3Ah LiFePO4 6.4V 1.5Ah LiFePO4 6.4V 3.3Ah
Dimension	161x34x23mm
IP Grade	IP20
Material	PC
Certificate	CB/CE/RCM/ROHS
Warranty	Converter 4 years (LiFePO4 battery 2 years)



SINGLE


- ✓ Battery external
- ✓ Self test optional

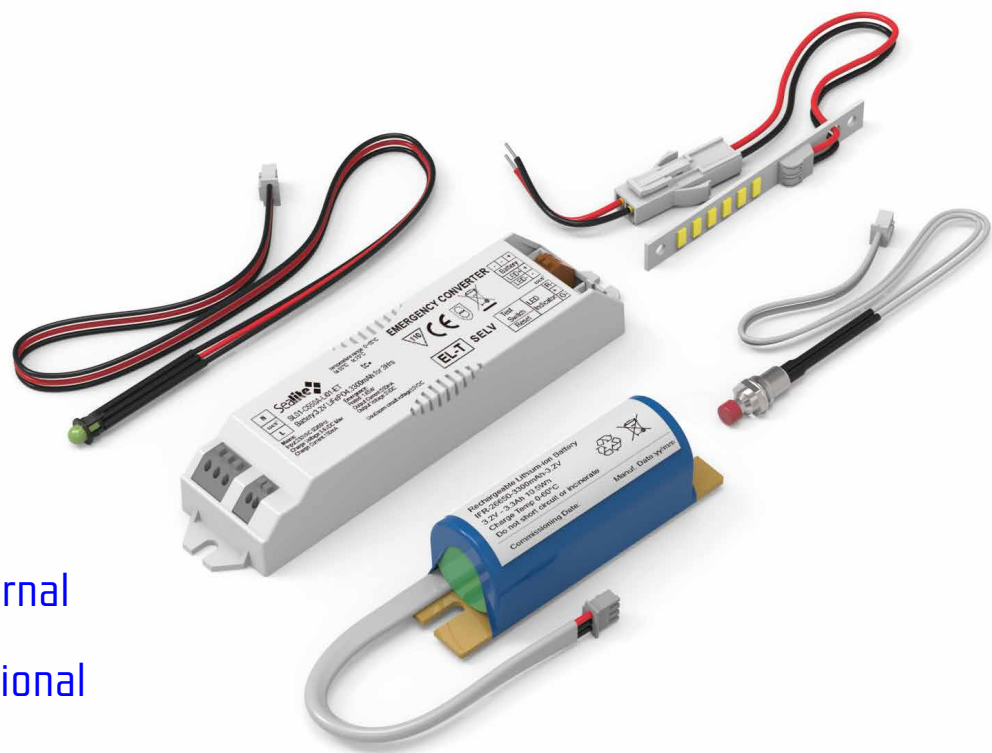

Product Features

- LiFePO4 and Ni-Cd 2 versions
- With external battery
- With LED module
- With test button and indicator
- Self test function available

DIMENSION

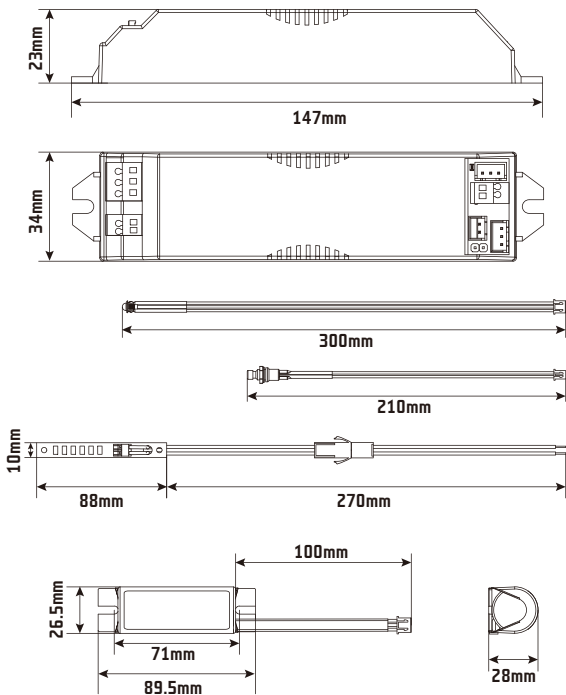

Specification

Model No.	SL01-C550A
Voltage	AC220-240V 50/60Hz
Input Power	Max. 1.6W
Emergency Power	1.65W
Lumen	220lm
EM Duration	3 hours
Output Current	550mA
Output Voltage	DC 3V
Ambient Temp	0-55°C
Function	Standard/Self Test
Battery Type	LiFePO4 3.2V 3.3Ah Ni-Cd 3.6V 2.0Ah
Dimension	147x34x23mm
IP Grade	IP20
Material	PC
Certificate	CB/CE/UKCA/RoHS
Warranty	Converter 4 years (LiFePO4 battery 2 years) (Ni-Cd battery 1 year)



HALF


- ✓ Battery external
- ✓ Self test optional



Product Features

- Economic cost
- With external battery
- With LED module
- With test button and indicator
- Self test function available

DIMENSION

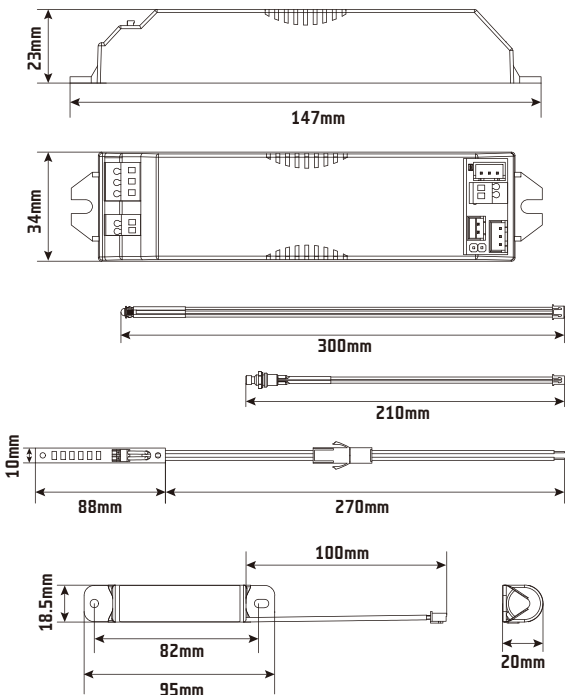

Specification

Model No.	SL04-C350A-Li01
Voltage	AC220-240V 50/60Hz
Input Power	Max. 0.8W
Emergency Power	1W
Lumen	140lm
EM Duration	3 hours
Output Current	350mA
Output Voltage	DC 3V
Ambient Temp	0-55°C
Function	Standard/Self Test
Battery Type	LiFePO4 3.2V 1.5Ah
Dimension	147x34x23mm
IP Grade	IP20
Material	PC
Certificate	CB/CE/UKCA/RoHS
Warranty	Converter 4 years (LiFePO4 battery 2 years) (Ni-Cd battery 1 year)




DOUBLE



- ✓ Battery built-in
- ✓ Self test optional


COMBO

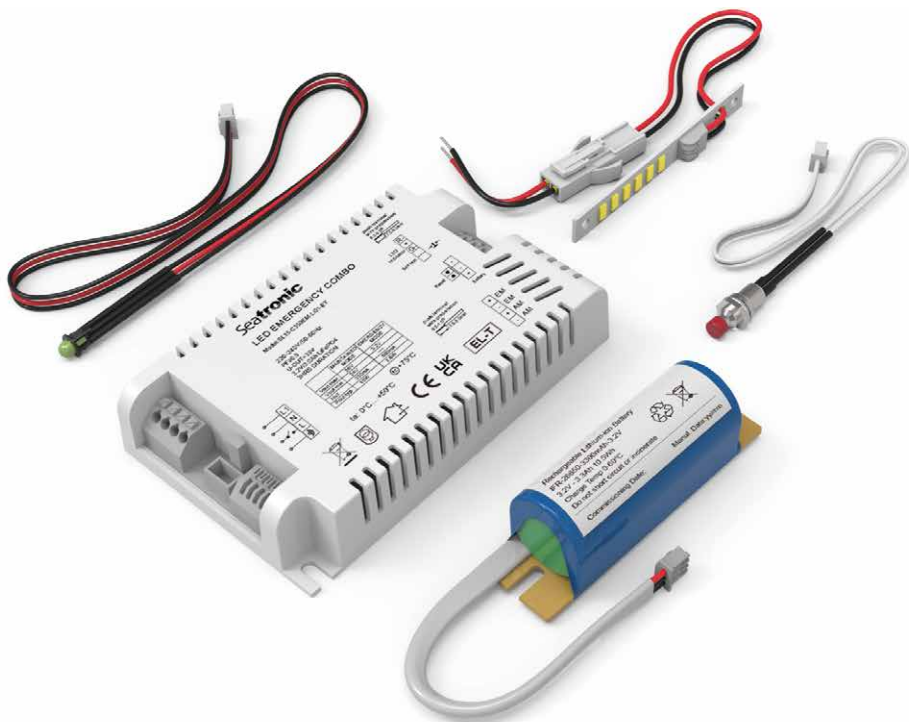

- ✓ Battery external
- ✓ Self test optional

Product Features

- EM converter + battery 2 in 1
- With battery built-in
- With LED module
- With test button and indicator
- Self test function available

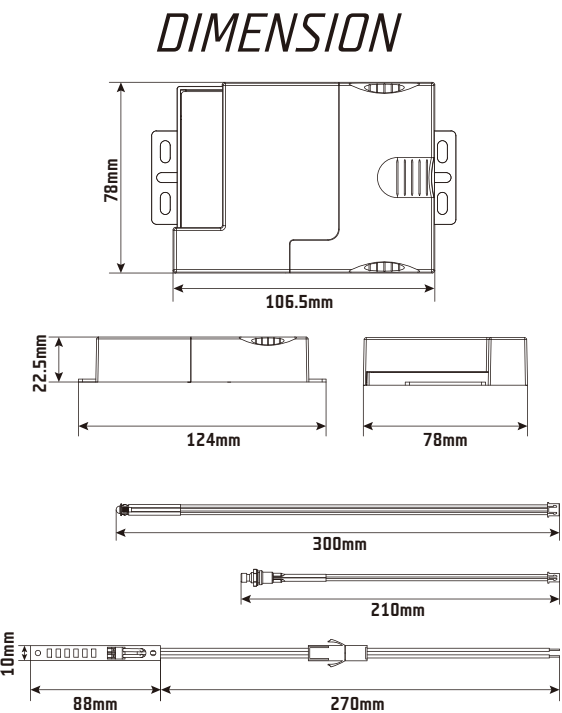


Specification

Model No.	SL02-C350B-Li04	
Voltage	AC220-240V 50/60Hz	
Input Power	Max. 1.2W	
Emergency Power	2.1W	
Lumen	220lm	
EM Duration	3 hours	
Output Current	350mA	
Output Voltage	DC 6V	
Ambient Temp	0-50°C	
Function	Standard/Self test	
Battery Type	LiFePO4 6.4V 1.5Ah	
Dimension	124x78x22.5mm	
IP Grade	IP20	
Material	PC	
Certificate	CB/CE/UKCA/RoHS	
Warranty	4 years{battery 2 years}	



Product Features

- Driver + converter + battery 3 in 1
- With external battery
- With test button and indicator
- LED module optional
- Self test function available

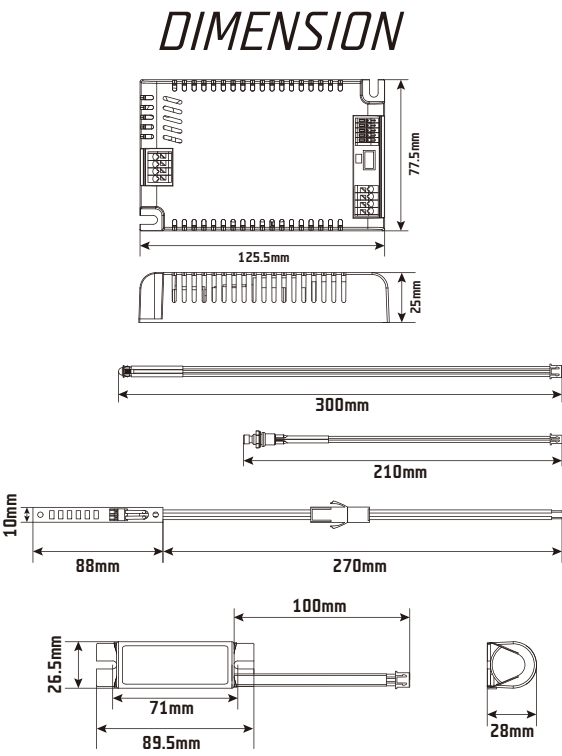

Specification

Model No.	SL15-C350EM-Li01 SL10-C350EM-Li01	
Voltage	AC220-240V 50/60Hz	
Standard Power	15W/350mA	10W/350mA
Output Voltage	24-36VDC	15-24VDC
Power Factor	>0.9	
Ripple Current	<±5%	
Input Power	Max. 10W	Max. 15W
Emergency Power	1.5W	
Output Voltage	2.8-3.4VDC	
Ambient Temp	0-55°C	
EM Lumen & Duration	220lm 3 hours	
Function	Standard/Self test	
Battery Type	LiFePO4 3.2V 3.3Ah	
Dimension	125.5x77.5x25mm	
IP Grade	IP20	
Material	PC	
Certificate	CB/CE/UKCA/RoHS	
Warranty	4 years{battery 2 years}	





- ✔ Multi-Lumen
- ✔ 3000K/4000K/6500K 3CCT

Size	Power	Standard Lumen	Emergency Lumen
Φ250mm	7.5W/9W/11W/12.5W	850lm/1000lm/1200lm/1300lm	180lm
Φ300mm	12W/14.5W/17.5W/19W	1350lm/1700lm/2000lm/2150lm	180lm
Φ330mm	16W/20W/24.5W/27W	2000lm/2400lm/2850lm/3100lm	180lm

Product Features

- Low profile design
- 3CCT + multi-lumen
- Φ250/300/330mm
- Four different trims optional
- Fit for BESA box mounting
- Entry holes on side and back
- Loop in & out, push-in connector




Specification

Model No.	SNOV
Voltage	AC220-240V 50/60Hz
EM Duration	3 hours
Color Temp	3000/4000K/6500K 3CCT
Ambient Temp	0-40°C
Function	MWS/Photocell/EM
Battery	LiFePO4 3.2V 1.5Ah
IP Grade	IP65
IK Grade	IK08
Material	Anti-UV PC (diffuser, base) ABS(trim)




Accessories & Dimension


Without trim

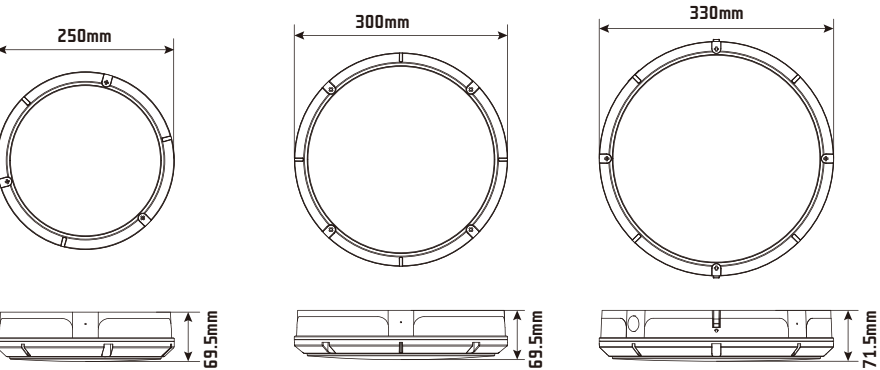

With trim

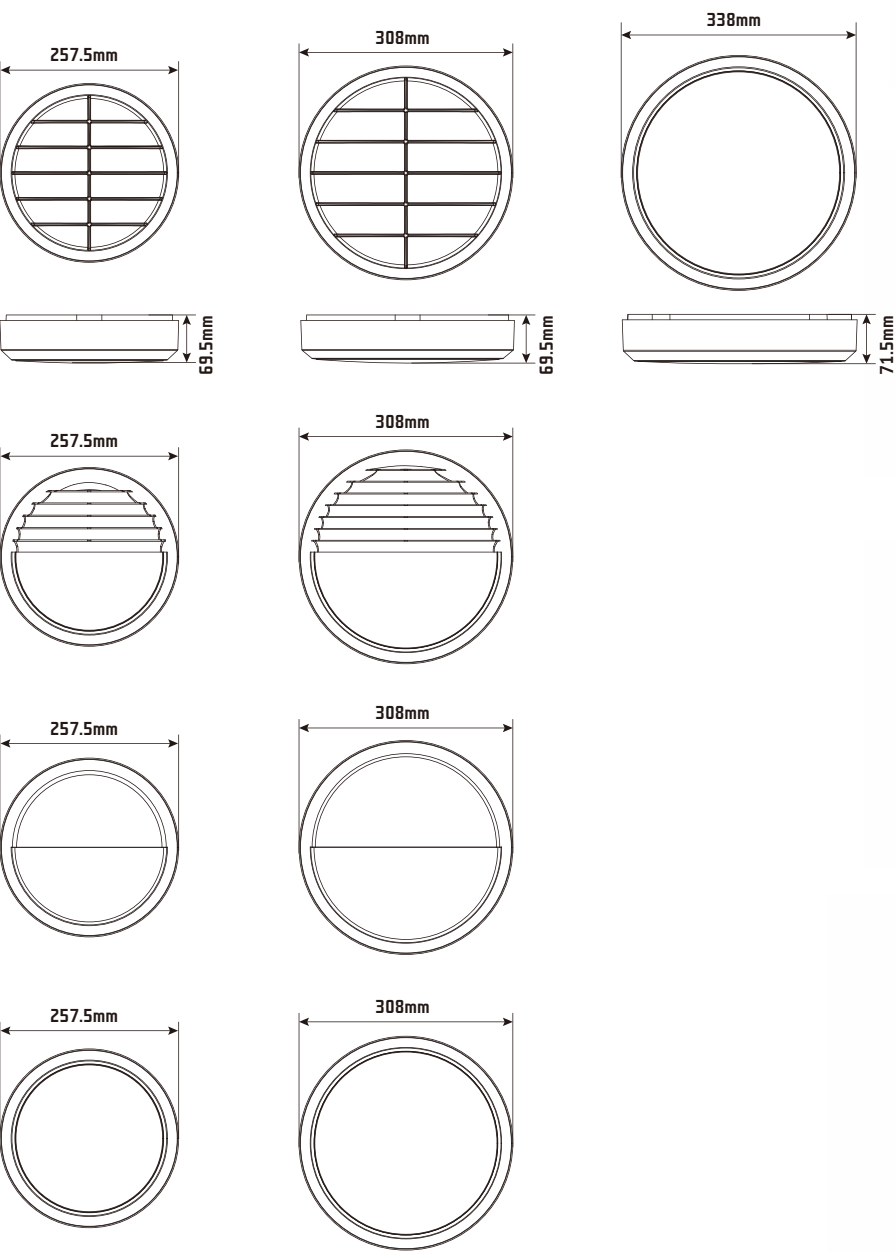


White Plain



Black Plain




Eyelid



Eyelid Grille



Grille



ARROW NX




- ✓ Multi-Lumen
- ✓ 3000K/4000K/6500K 3CCT

Size	Power	Standard Lumen	Emergency Lumen
600mm	12W/20W	1440lm/2400lm	180lm
1200mm	28W/40W	3640lm/5200lm	180lm
1500mm	35W/50W	4550lm/6500lm	180lm

Product Features

- UV-proof PC body and diffuser
- Multi-Power driver
- 3000K/4000K/6500K 3CCT
- High efficiency >130lm/W
- Stainless steel clips
- IP65 IK08

DIMENSION

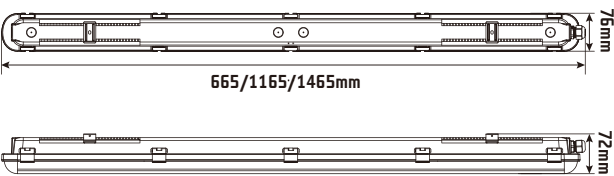

Specification

Model No.	SARN
Voltage	AC220-240V 50/60Hz
EM Duration	3 hours
Color Temp	3000K/4000K/6500K 3CCT
Ambient Temp	0-40°C
Function	EM
Battery	LiFePO4 6.4V 1.5Ah
IP Grade	IP65
IK Grade	IK08
Material	Anti-UV PC



ARROW




- ✓ Multi-Lumen
- ✓ 3000K/4000K/6500K 3CCT

Size	Power	Standard Lumen	Emergency Lumen
600mm	12-20W	1500-2500lm	180lm
1200mm	24-40W	3000-5000lm	180lm
1500mm	65W	7500lm	180lm
1800mm	82W	9200lm	180lm

Product Features

- UV-proof PC body and diffuser
- Multi-Power driver
- 3000K/4000K/6500K 3CCT
- High efficiency >125lm/W
- Corridor sensor version optional
- Stainless steel clips
- IP65 IK08

DIMENSION

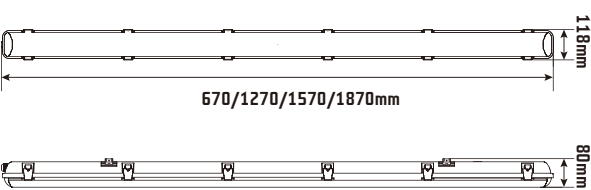

Specification

Model No.	SARR
Voltage	AC220-240V 50/60Hz
EM Duration	3 hours
Color Temp	3000/4000K/6500K 3CCT
Ambient Temp	0-40°C
Function	MWS/EM
Battery	LiFePO4 6.4V 1.5Ah/3.0Ah
IP Grade	IP65
IK Grade	IK08
Material	Anti-UV PC



KAPPA



✓ 3hours emergency duration


✓ 3000K/4000K/6500K 3CCT

Size	Power	Standard Lumen	Emergency Lumen
600mm	17W	2400lm	180lm
1200mm	36W	5000lm	180lm
1500mm	50W	7000lm	180lm

Product Features

- 95 mm width steel body
- Multi-power driver
- 3000K/4000/5700K 3CCT or single CCT
- High efficiency >125lm/W
- Quality white powder coat finish with robust PC diffuser
- Lockable cover for easy installation

DIMENSION

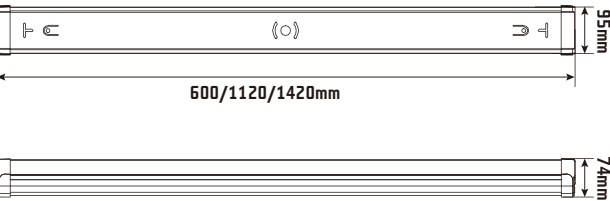

Specification

Model No.	SKAP
Voltage	AC220-240V 50/60Hz
EM Duration	3 hours
Color Temp	3000/4000K/5700K 3CCT
Ambient Temp	0-40°C
Function	MWS/EM
Battery	LiFePO4 3.2V 1.5Ah
IP Grade	IP20
IK Grade	IK08
Material	Diffuser: PC Base: Steel



POLO



✓ 3hours emergency duration


✓ 3000K/4000K/5700K 3CCT

Size	Power	Standard Lumen	Emergency Lumen
Φ350mm	14W	1300lm	170lm
Φ432mm	21W	2100lm	170lm

Product Features

- 3000K/4000K/5700K 3CCT
- Φ350mm/Φ432mm 2 sizes
- Hinger locking design
- IP65, IK08

DIMENSION

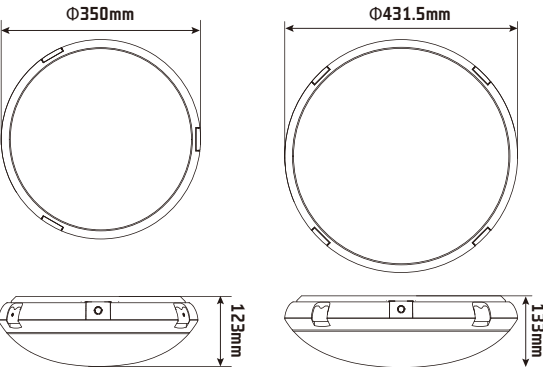

Specification

Model No.	SP00
Voltage	AC220-240V 50/60Hz
EM Duration	3 hours
Color Temp	3000/4000K/5700K 3CCT
Ambient Temp	0-40°C
Function	MWS/EM
Battery	LiFePO4 6.4V 1.5Ah
IP Grade	IP65
IK Grade	IK08
Material	PC



Contact details

IINNO Ltd

Unit 7, 8/F., Tower B,
83 King Lam Street,
Lai Chi Kok, Kowloon,
Hong Kong

Tel: +852 2134 9906

+86 (0)769 23010151/2

M: +86 13922905402

Email: sales@iinno-lighting.com

www.iinno-lighting.com

