

Commercial Lighting

Designing your lighting solutions



338 Series

UGR<19



Track light
TL338



Suspension
PD338B



Suspension
PD338A



Recessed
DL338



Surface mounted
DL338A



Track spot surface
DL338B


DIY MODULAR DESIGN



Four size options



3-CCT changeable

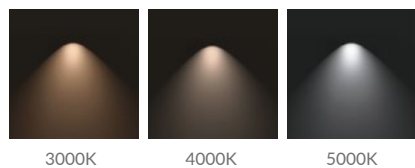


Replaceable reflector (front trim is not exchangeable)



Power adjustable

Ø65mm :10W/12W/15W
 Ø85mm :15W/20W/25W
 Ø100mm :25W/30W/35W

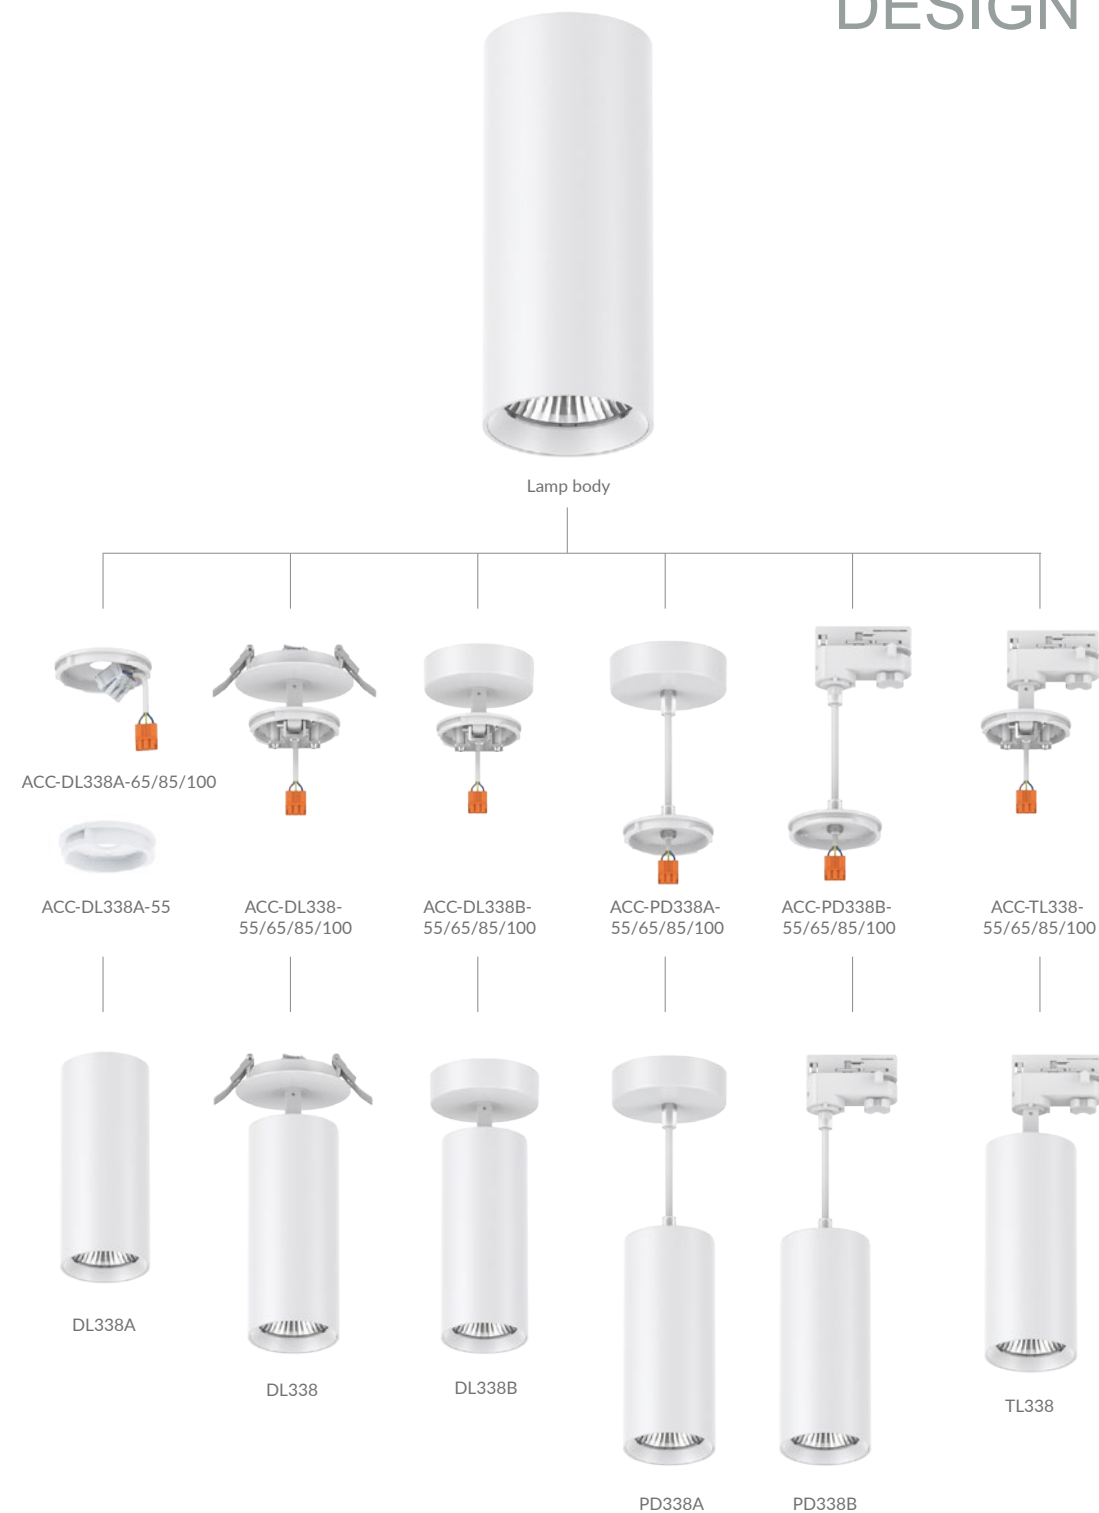




DL338A



DL338B


DL338A/B Downlight



DL338A/B is a DIY modular series with an exquisite appearance and anti-glare UGR19 design, 6 kinds of installation ways, 3 reflectors and 3 front ring colors can be exchangeable. It adopts brand Bridgelux COB led chip with 120lm/W light efficiency. Four size options : Ø55mm, Ø65mm, Ø85mm, Ø100mm. It can do triac dim, DALI dim, CCT interchangeable and wattage adjustable.

Materials of Housing : Aluminium

Materials of Optics : Aluminium+transparent tempered glass

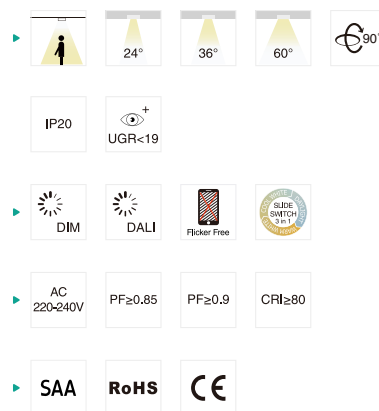


Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL338A/B-55-6W	6W	Ø55x160/Ø55x211	750lm	0.33/0.49	24PCS
DL338A/B-55-10W	10W	Ø55x160/Ø55x211	1200lm	0.33/0.49	24PCS
DL338A/B-65-10W	10W	Ø65x180/Ø65x231	1200lm	0.44/0.60	24PCS
DL338A/B-65-15W	15W	Ø65x180/Ø65x231	1750lm	0.44/0.60	24PCS
DL338A/B-85-20W	20W	Ø85x206/Ø85x270	2550lm	0.73/0.89	12PCS
DL338A/B-85-25W	25W	Ø85x206/Ø85x270	3150lm	0.73/0.89	12PCS
DL338A/B-100-30W	30W	Ø100x220/Ø100x284	3650lm	0.99/1.15	12PCS
DL338A/B-100-35W	35W	Ø100x220/Ø100x284	4100lm	0.99/1.15	12PCS

CCT ——— 2700K 3000K 4000K Finish ——— White Black

Trim ——— Honeycomb White Honeycomb Black Honeycomb Golden


DL338 Downlight



DL338 is a DIY modular series with an exquisite appearance and anti-glare UGR19 design, 6 kinds of installation ways, 3 reflectors and 3 front ring colors can be exchangeable. It adopts brand Bridgelux COB led chip with 120lm/W light efficiency. Four size options : Ø55mm, Ø65mm, Ø85mm, Ø100mm. It can do triac dim, DALI dim, CCT interchangeable and wattage adjustable.

Materials of Housing : Aluminium

Materials of Optics : Aluminium+transparent tempered glass

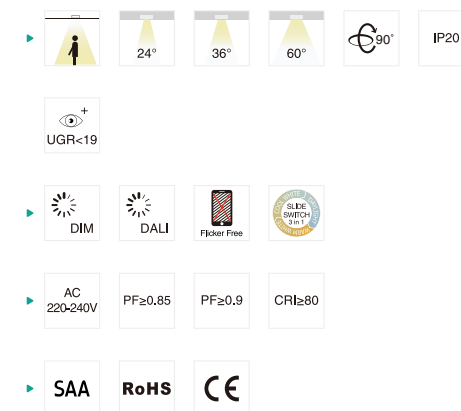

Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL338-55-6W	6W	Ø55x215	90-95	750lm	0.51	12PCS
DL338-55-10W	10W	Ø55x215	90-95	1200lm	0.51	12PCS
DL338-65-10W	10W	Ø65x235	90-95	1200lm	0.62	12PCS
DL338-65-15W	15W	Ø65x235	90-95	1750lm	0.62	12PCS
DL338-85-20W	20W	Ø85x274	90-95	2550lm	1.08	12PCS
DL338-85-25W	25W	Ø85x274	90-95	3150lm	1.08	12PCS
DL338-100-30W	30W	Ø100x288	90-95	3650lm	1.17	12PCS
DL338-100-35W	35W	Ø100x288	90-95	4100lm	1.17	12PCS

CCT ——— 2700K 3000K 4000K Trim ——— White Black


Trim ——— Honeycomb White Honeycomb Black Honeycomb Golden

PD338A



PD338B


PD338A/B Downlight




PD338A/B is a DIY modular series with an exquisite appearance and anti-glare UGR19 design, 6 kinds of installation ways, 3 reflectors and 3 front ring colors can be exchangeable. It adopts brand Bridgelux COB led chip with 120lm/W light efficiency. Four size options : Ø55mm, Ø65mm, Ø85mm, Ø100mm. It can do triac dim, DALI dim, CCT interchangeable and wattage adjustable.

Materials of Housing : Aluminium


Materials of Optics : Aluminium+transparent tempered glass

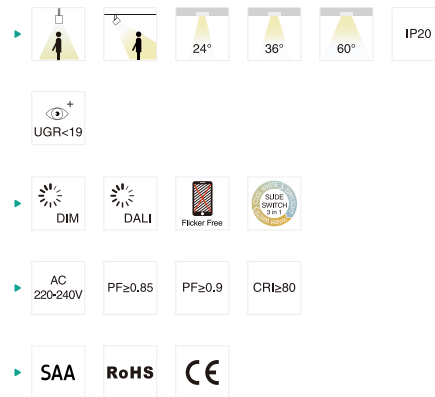

Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PD338A/B-55-6W	6W	Ø55x1189/Ø55x1213	750lm	0.50/0.48	12PCS
PD338A/B-55-10W	10W	Ø55x1189/Ø55x1213	1200lm	0.50/0.48	12PCS
PD338A/B-65-10W	10W	Ø65x1209/Ø65x1233	1200lm	0.61/0.59	12PCS
PD338A/B-65-15W	15W	Ø65x1209/Ø65x1233	1750lm	0.61/0.59	12PCS
PD338A/B-85-20W	20W	Ø85x1235/Ø85x1259	2550lm	0.98/0.87	12PCS
PD338A/B-85-25W	25W	Ø85x1235/Ø85x1259	3150lm	0.98/0.87	12PCS
PD338A/B-100-30W	30W	Ø100x1249/Ø100x1273	3650lm	1.16/1.14	12PCS
PD338A/B-100-35W	35W	Ø100x1249/Ø100x1273	4100lm	1.16/1.14	12PCS




TL338 Track light




TL338 is a DIY modular series with an exquisite appearance and anti-glare UGR19 design, 6 kinds of installation ways, 3 reflectors and 3 front ring colors can be exchangeable. It adopts brand Bridgelux COB led chip with 120lm/W light efficiency. Four size options : Ø55mm, Ø65mm, Ø85mm, Ø100mm. It can do triac dim, DALI dim, CCT interchangeable and wattage adjustable.

Materials of Housing : Aluminium

Materials of Optics : Aluminium+transparent tempered glass

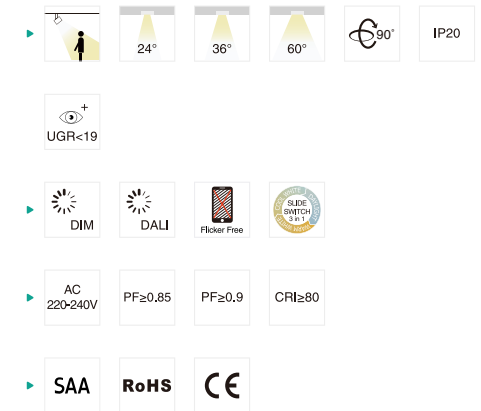

Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL338-55-6W	6W	Ø55x233	750lm	0.48	12PCS
TL338-55-10W	10W	Ø55x233	1200lm	0.48	12PCS
TL338-65-10W	10W	Ø65x253	1200lm	0.58	12PCS
TL338-65-15W	15W	Ø65x253	1750lm	0.58	12PCS
TL338-85-20W	20W	Ø85x292	2550lm	0.87	12PCS
TL338-85-25W	25W	Ø85x292	3150lm	0.87	12PCS
TL338-100-30W	30W	Ø100x306	3650lm	1.13	12PCS
TL338-100-35W	35W	Ø100x306	4100lm	1.13	12PCS



228 Series



Surface mounted
DL228A



Track spot surface
DL228B



TL228
with ceiling box



Suspension
PD228




Track light
TL228



Suspension
PD228B




Suspension
PD228B

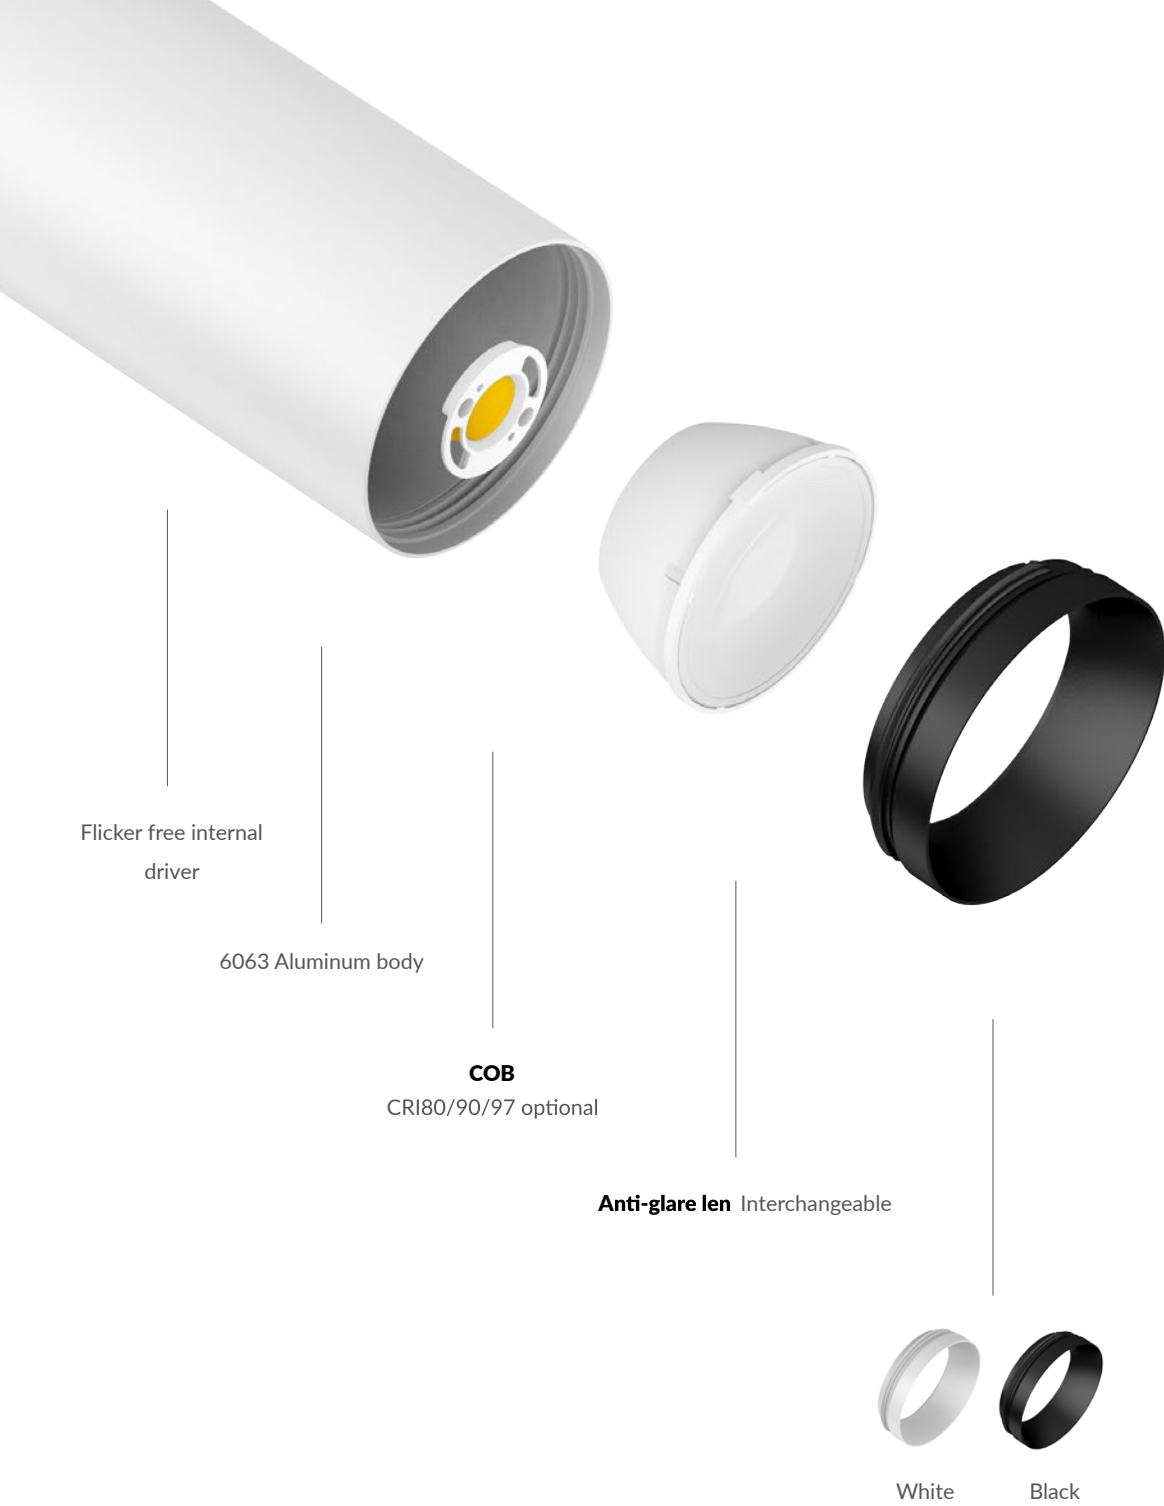




DL228A Downlight



DL228A adopt high lumen COB chip with uniform light effect and enhanced glare control. It offers a wide choice of beam angles 24°/ 36°/60° for optional.

Materials of Housing : Aluminium

Materials of Optics : PMMA

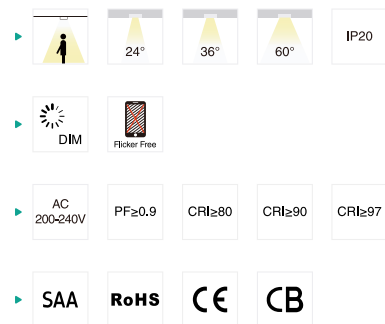

Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL228A-10W	10W	Ø65x157	1100lm	0.45	12PCS
DL228A-15W	15W	Ø65x157 (Non-dim) Ø85x178 (Triac-dim)	1650lm	0.45	12PCS
DL228A-20W	20W	Ø85x178	2250lm	0.67	12PCS
DL228A-25W	25W	Ø85x178	2700lm	0.67	12PCS
DL228A-30W	30W	Ø100x211	3050lm	1.00	12PCS
DL228A-40W	40W	Ø100x211	4200lm	1.00	12PCS


CCT — 2700K — 3000K — 4000K

Finish — White — Black

Interchangeable lens options




DL228B Downlight



DL228B surface mounted downlight with adjustable lighting orientation, 350° rotate and 90° tilt. It offers a wide choice of beam angles 24°/ 36°/60° for optional. Driver built-in easy for installation.

Materials of Housing : Aluminium

Materials of Optics : PMMA

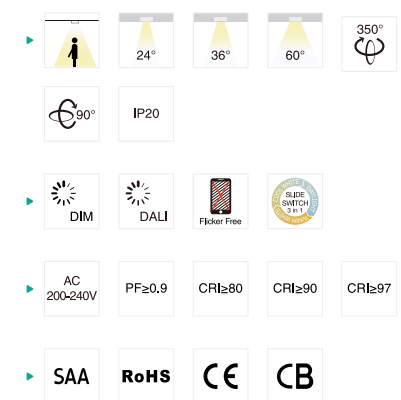


Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL228B-10W	10W	Ø65x218	1100lm	0.55	12PCS
DL228B-15W	15W	Ø65x218 (Non-dim) Ø85x241(Triac-dim)	1650lm	0.55	12PCS
DL228B-20W	20W	Ø85x241	2250lm	0.82	12PCS
DL228B-25W	25W	Ø85x241	2700lm	0.82	12PCS
DL228B-30W	30W	Ø100x274	3050lm	1.15	12PCS
DL228B-40W	40W	Ø100x274	4200lm	1.15	12PCS

CCT — 2700K — 3000K — 4000K


Finish — White — Black

Interchangeable lens options






PD228 Downlight



PD228 pendant spot light is a high-performance LED luminaire that is ideal for commercial or residential applications. It adopts high lumen COB chip and lens design offer uniform light effect and enhanced glare control.

Materials of Housing : Aluminium

Materials of Optics : PMMA

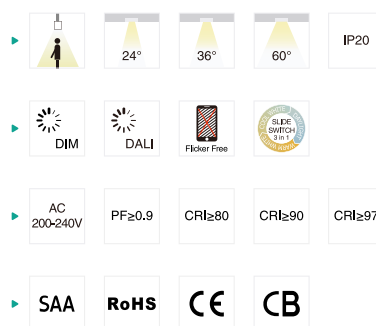


Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PD228-10W	10W	Ø65x157	1100lm	0.55	12PCS
PD228-15W	15W	Ø65x157 (Non-dim) Ø85x178 (Triac-dim)	1650lm	0.55	12PCS
PD228-20W	20W	Ø85x178	2250lm	0.80	12PCS
PD228-25W	25W	Ø85x178	2700lm	0.80	12PCS
PD228-30W	30W	Ø100x211	3050lm	1.15	12PCS
PD228-40W	40W	Ø100x211	4200lm	1.15	12PCS


CCT — 2700K — 3000K — 4000K

Finish — White — Black

Interchangeable lens options




TL228 Track light



TL228 anti-glare track light is with high lumen COB chip and lens design offer an uniform lighting output, flicker free internal driver. Modular lens design for different beam angle and convenient maintenance.

Materials of Housing : Aluminium

Materials of Optics : PMMA

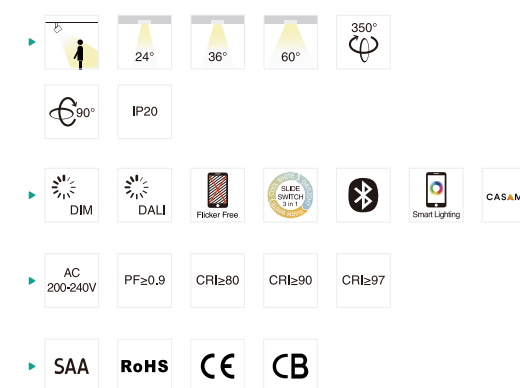

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL228-10W	10W	Ø65x157x249	1100lm	0.50	12PCS
TL228-15W	15W	Ø65x157x249(Non-dim) Ø85x178x269 (Triac-dim)	1650lm	0.50	12PCS
TL228-20W	20W	Ø85x178x269	2250lm	0.76	12PCS
TL228-25W	25W	Ø85x178x269	2700lm	0.76	12PCS
TL228-30W	30W	Ø100x211x302	3050lm	1.10	12PCS
TL228-40W	40W	Ø100x211x302	4200lm	1.10	12PCS

CCT — 2700K — 3000K — 4000K

Finish — White — Black — Silver

Interchangeable lens options



322 series



Surface mounted
DL322A



Recessed
DL322B



Suspension
PD322



Track light
TL322A



DALI track light
TL322B



Suspension with track
PD322A




DALI suspension with track
PD322B



Oblique axis rotatory

Modern spherical design

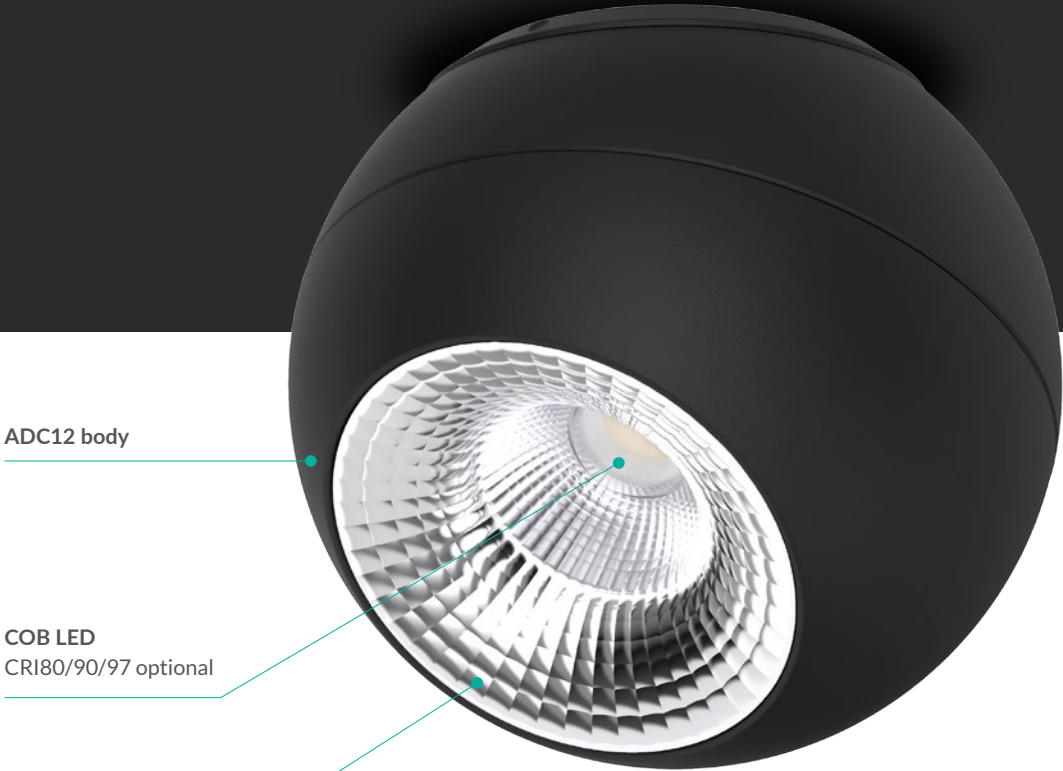

ADC12 body

COB LED
CRI80/90/97 optional

UGR22
36°/60° optional




DIY modular design






DL322A Downlight



DL322A adopts high lumen COB chip. The type A is surface mounted. ADC12 aluminum lamp body provides excellent heat dissipation. 340degree rotatory and lighting direction is 40 degree adjustable .

Materials of Housing : Die-casting Aluminium

Materials of Optics : PC




Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL322A-10W	10W	Ø120x96	1200lm	0.81	12PCS
DL322A-14W	14W	Ø120x96	1600lm	0.81	12PCS

CCT — 2700K — 3000K — 4000K

Finish — White — Black




DL322B Downlight



DL322B adopts high lumen COB chip. The type B is recessed installation. ADC12 aluminum lamp body provides excellent heat dissipation. 340degree rotatory and lighting direction is 40 degree adjustable .

Materials of Housing : Die-casting Aluminium

Materials of Optics : PC




Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL322B-12W	12W	Ø172x100	Ø150-160	1400lm	1.13	12PCS
DL322B-16W	16W	Ø172x100	Ø150-160	1800lm	1.13	12PCS
DL322B-20W	20W	Ø172x100	Ø150-160	2100lm	1.13	12PCS

CCT — 2700K — 3000K — 4000K

Trim — White — Black




PD322 Downlight



PD322 adopts high lumen COB chip. It is suspension version. PD322A is track suspending, PD322B is DALI track suspending for option. ADC12 aluminum lamp body provides excellent heat dissipation. 340degree rotatory and lighting direction is 40 degree adjustable

Materials of Housing : Die-casting Aluminium

Materials of Optics : PC




Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PD322/ PD322A-10W	10W	Ø120x96	1200lm	0.97	12PCS
PD322/ PD322A-14W	14W	Ø120x96	1600lm	0.97	12PCS
PD322B-13W	13W	Ø120x96	1400lm	1.01	12PCS
PD322B-17W	17W	Ø120x96	1800lm	1.01	12PCS
PD322B-21W	21W	Ø120x96	2100lm	1.01	12PCS

CCT — 2700K — 3000K — 4000K

Finish — White — Black




TL322 Track light



TL322 led track light is an ingenious design adopts high efficiency led. ADC12 aluminum lamp body provides excellent heat dissipation. 340degree rotatory and lighting direction is 40 degree adjustable .

Materials of Housing : Die-casting Aluminium

Materials of Optics : PC





Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL322A-10W	10W	Ø120x96	1200lm	0.90	12PCS
TL322A-14W	14W	Ø120x96	1600lm	0.90	12PCS
TL322B-13W	13W	Ø120x96	1400lm	0.92	12PCS
TL322B-17W	17W	Ø120x96	1800lm	0.92	12PCS
TL322B-21W	21W	Ø120x96	2100lm	0.92	12PCS

CCT — 2700K — 3000K — 4000K

Finish — White — Black



DL126 Downlight

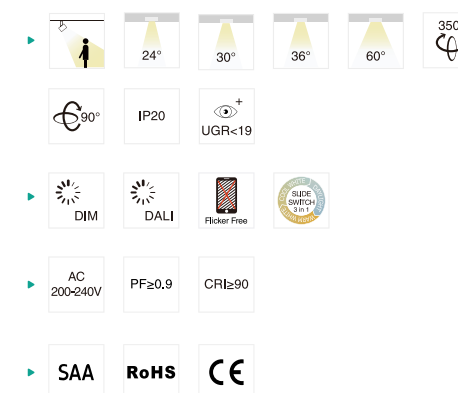

DL126 is a modular series with super slim and rotate head design, UGR<19, CRI90 provide high quality light output experience, 3CCT available, 3 kinds of installation for option: track, surface mounted and pendant.


Materials of Housing : Die-casting Aluminium

Materials of Optics : PC


Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL126-65-10W	10W	Ø65x248	980lm	0.78	12PCS
DL126-65-15W	15W	Ø65x248	1400lm	0.78	12PCS
DL126-85-20W	20W	Ø85x278	2100lm	1.15	6PCS
DL126-85-25W	25W	Ø85x278	2500lm	1.15	6PCS
DL126-85-28W	28W	Ø85x278	2850lm	1.15	6PCS
DL126-85-30W	30W	Ø85x278	2900lm	1.15	6PCS

CCT — 2700K — 3000K — 4000K — Finish — White — Black

Installation accessories — ACC-DL126 — Honeycomb cover

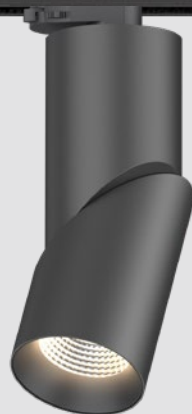


TL126 Track light



TL126 is a modular series with super slim and rotate head design, UGR<19, CRI90 provide high quality light output experience, 3CCT available, 3 kinds of installation for option: track, surface mounted and pendant.

Materials of Housing : Die-casting Aluminium

Materials of Optics : PC

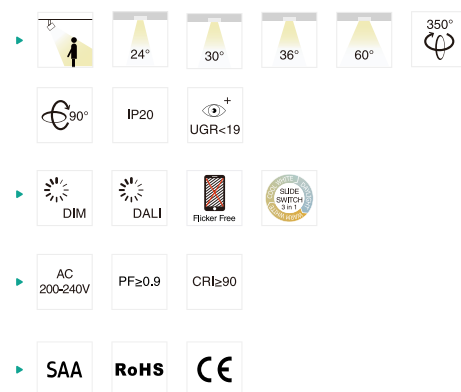

Code	Watt	Size(Ax Bmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL126-65-10W	10W	Ø65x248	980lm	0.75	12PCS
TL126-65-15W	15W	Ø65x248	1400lm	0.75	12PCS
TL126-85-20W	20W	Ø85x278	2100lm	1.25	6PCS
TL126-85-25W	25W	Ø85x278	2500lm	1.25	6PCS
TL126-85-28W	28W	Ø85x278	2850lm	1.25	6PCS
TL126-85-30W	30W	Ø85x278	2900lm	1.25	6PCS


CCT — 2700K — 3000K — 4000K

Finish — White — Black

Installation accessories




PD126 Pendant light



PD126 is a modular series with super slim and rotate head design, UGR<19, CRI90 provide high quality light output experience, 3CCT available, 3 kinds of installation for option: track, surface mounted and pendant.

Materials of Housing : Die-casting Aluminium

Materials of Optics : PC

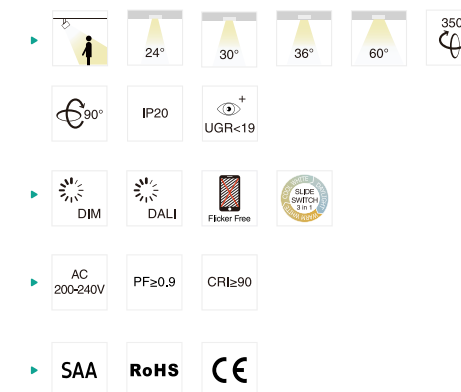


Code	Watt	Size(Ax Bmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PD126-65-10W	10W	Ø65x248	980lm	0.91	12PCS
PD126-65-15W	15W	Ø65x248	1400lm	0.94	12PCS
PD126-85-20W	20W	Ø85x278	2100lm	1.45	6PCS
PD126-85-25W	25W	Ø85x278	2500lm	1.45	6PCS
PD126-85-28W	28W	Ø85x278	2850lm	1.45	6PCS
PD126-85-30W	30W	Ø85x278	2900lm	1.45	6PCS

CCT — 2700K — 3000K — 4000K

Finish — White — Black

Installation accessories







Surface
130LM/W



Wall mounted

2CCT changeable




Pendant



417 Series




DL417 Downlight



417 is an element series products, same fitting with different installation, DL417 for surface mounted, PD417 for pendant mounted and WL417 is for wall mounted. Internal flicker free driver, adopting high lumen SMD LED and interchangeable CCT with slide switch is available.

Materials of Housing : Aluminium


Materials of Optics : PC




Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL417-15W	15W	184x124x143	1800lm	0.75	12PCS

CCT ——— 2700K ——— 3000K ——— 4000K

Finish ——— White ——— Black

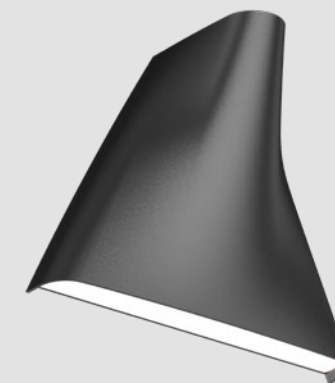


PD417 Pendant light



417 is an element series products, same fitting with different installation, DL417 for surface mounted, PD417 for pendant mounted and WL417 is for wall mounted. Internal flicker free driver, adopting high lumen SMD LED and interchangeable CCT with slide switch is available.


Materials of Housing : Aluminium

Materials of Optics : PC



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PD417-15W	15W	184x124x143	1500lm	0.86	12PCS


WL417 Exterior wall light



417 is an element series products, same fitting with different installation, DL417 for surface mounted, PD417 for pendant mounted and WL417 is for wall mounted. Internal flicker free driver, adopting high lumen SMD LED and interchangeable CCT with slide switch is available.

Materials of Housing : Aluminium

Materials of Optics : PC



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
WL417-8W	8W	180x143x72.5	800lm	0.60	12PCS

CCT — 2700K — 3000K — 4000K

Finish — White — Black

CCT — 2700K — 3000K — 4000K

Finish — White — Black




LED Downlight /Series/

LED downlight series provide turn-key lighting solutions in domestic and commercial applications. Our downlight is a combination of technique and emotion. We offer our customers a platform to experience the good quality and lighting effects with unique design, 100lm/w and more, UGR<19, Ra80 and Ra90, smart function. IINNO LED downlight family provides different solutions for project and distribution with different product types: COB/SMD version, IP54/IP44/IP20, recessed/surface mounted/pendant, different sizes, different watts. The export volume of IINNO downlight is in the top three for three consecutive years according to China export data. IINNO is your one-stop service supplier for any downlight you're looking for!




DL210 Downlight



DL210 LED downlight is with super slim design, external driver, adopting high lumen SMD LED with uniform light. Interchangeable CCT with slide switch is available. IP54 waterproof for front side.

Materials of Housing : Aluminium
Materials of Optics : PC

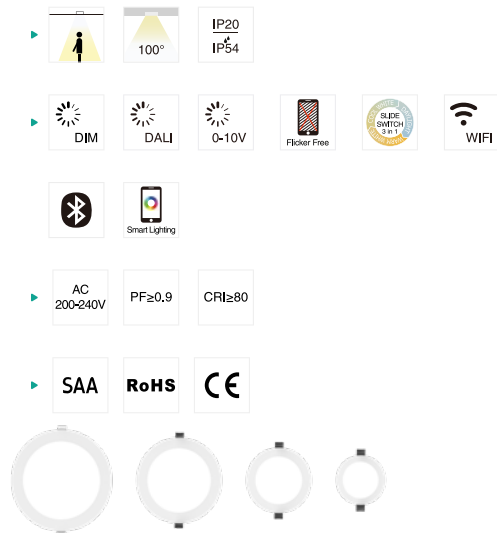


Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL210-3-10W	10W	Ø110x30	Ø90-95	1000lm	0.25	36PCS
DL210-3-13W	13W	Ø110x30	Ø90-95	1320lm	0.25	36PCS
DL210-4-13W	13W	Ø145x30	Ø120-130	1370lm	0.35	30PCS
DL210-4-18 W	18W	Ø145x30	Ø120-130	1980lm	0.35	30PCS
DL210-6-18W	18W	Ø190x30	Ø160-170	1930lm	0.50	24PCS
DL210-6-25W	25W	Ø190x30	Ø160-170	2750lm	0.50	24PCS
DL210-8-25W	25W	Ø225x34	Ø200-210	2750lm	0.65	12PCS
DL210-8-35W	35W	Ø225x34	Ø200-210	3900lm	0.65	12PCS
DL210-8-42W	42W	Ø225x34	Ø200-210	4750lm	0.65	12PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black




DL216 Downlight



DL216 LED downlight is with high lumen SMD LED. Deep trim design provides soft lighting for eyes. external driver is available for triac dim, 0~10V and DALI. 3CCT changeable with slide switch is available. IP44 waterproof for front side.

Materials of Housing : Aluminium
Materials of Optics : PC

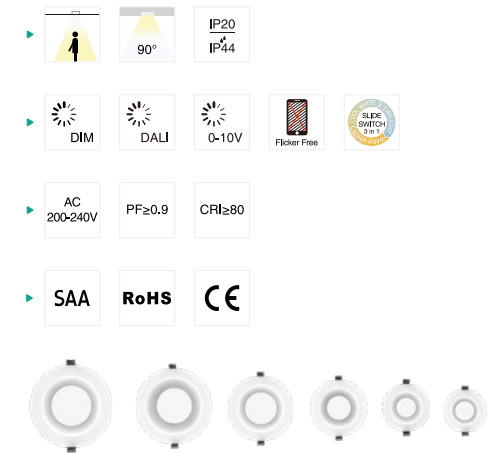


Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL216-3-8W	8W	Ø115x45	Ø90-105	790lm	0.20	36PCS
DL216-3.5-10W	10W	Ø129x45	Ø105-115	1045lm	0.24	36PCS
DL216-4-13W	13W	Ø152x48	Ø125-140	1355lm	0.30	24PCS
DL216-5-20W	20W	Ø175x52	Ø145-160	2090lm	0.40	12PCS
DL216-7-25W	25W	Ø203x56	Ø175-190	2610lm	0.50	12PCS
DL216-7-30W	30W	Ø203x56	Ø175-190	2950lm	0.50	12PCS
DL216-8-33W	33W	Ø228x63	Ø205-215	3445lm	0.65	6PCS
DL216-8-40W	40W	Ø228x63	Ø205-215	4000lm	0.65	6PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black




DL97 Downlight



DL97 LED downlight is with high lumen SMD LED, external driver is available for triac dim, 0~10V and DALI, IP54 IK06 protection level. CCT changeable by slide switch is available. Full size from 2.5 inch to 8 inch are all available.

Materials of Housing : Aluminium

Materials of Optics : PC

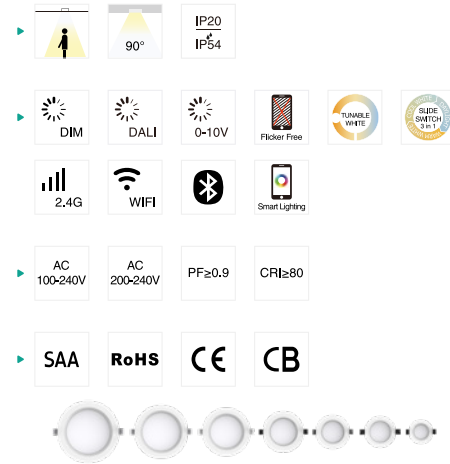


Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL97-2.5-7W	7W	Ø85x39	Ø70-75	590lm	0.20	50PCS
DL97-3-10W	10W	Ø110x38	Ø90-95	980lm	0.25	36PCS
DL97-3-13W	13W	Ø110x38	Ø90-95	1300lm	0.25	36PCS
DL97-3.5-13W	13W	Ø120x45	Ø100-110	1230lm	0.31	30PCS
DL97-4-15W	15W	Ø145x45	Ø120-130	1600lm	0.46	30PCS
DL97-5-18W	18W	Ø170x45	Ø140-150	2070lm	0.52	30PCS
DL97-6-18W	18W	Ø190x45	Ø160-170	1900lm	0.66	20PCS
DL97-6-25W	25W	Ø190x45	Ø160-170	2680lm	0.66	20PCS
DL97-6-35W	35W	Ø190x45	Ø160-170	3900lm	0.66	20PCS
DL97-8-18W	18W	Ø228x45	Ø200-210	2050lm	0.81	10PCS
DL97-8-25W	25W	Ø228x45	Ø200-210	2650lm	0.81	10PCS
DL97-8-35W	35W	Ø228x45	Ø200-210	4025lm	0.81	10PCS
DL97-2.5-7W	7W	Ø86x39	Ø68x39	708lm	0.20	50PCS
DL97-3-10W	10W	Ø110x38	Ø88x38	1120lm	0.32	36PCS
DL97-3.5-13W	13W	Ø120x39	Ø100x45	1420lm	0.41	36PCS
DL97-4-15W	15W	Ø145x45	Ø118x45	1770lm	0.47	30PCS
DL97-5-18W	18W	Ø170x45	Ø136x45	2100lm	0.52	30PCS
DL97-6-18W	18W	Ø190x45	Ø155x45	2170lm	0.64	20PCS
DL97-6-25W	25W	Ø190x45	Ø155x45	3130lm	0.64	20PCS
DL97-8-18W	18W	Ø228x45	Ø200x45	2300lm	0.81	20PCS
DL97-8-25W	25W	Ø228x45	Ø200x45	3200lm	0.81	10PCS
DL97-8-35W	35W	Ø228x45	Ø200x45	4580lm	0.81	10PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black




CL59 Downlight



CL59 LED downlight is with high lumen SMD LED, external driver is available for triac dim, 0~10V and DALI, IP20 or IP44 available. CCT changeable by slide switch is available. Full size from 2 inch to 10 inch are all available.

Materials of Housing : Aluminium

Materials of Optics : PC

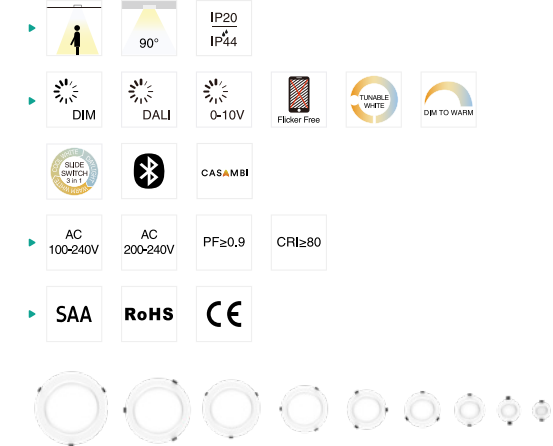

Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
CL59-2-7W	7W	Ø80x39	Ø60-70	480lm	0.28	50PCS
CL59-2.5-10W	10W	Ø85x39.5	Ø70-75	730lm	0.24	50PCS
CL59-3-10W/-F	10W	Ø100x38	Ø90-100	720lm	0.28	24PCS
CL59-3-12W/13W/-F	12W/13W	Ø110x38	Ø90-100	1170lm/950lm	0.28	24PCS
CL59-3.5-13W	13W	Ø120x39	Ø100-110	1150lm	0.45	24PCS
CL59-4-13W/18W	13W/18W	Ø145x45	Ø120-130	950lm/1450lm	0.59	30PCS
CL59-5-18W	18W	Ø170x45	Ø140-150	1550lm	0.70	30PCS
CL59-5-25W	25W	Ø170x45	Ø140-150	2100lm	0.70	30PCS
CL59-6-18W	18W	Ø190x45	Ø160-170	1560lm	0.83	20PCS
CL59-6-25W/35W	25W/35W	Ø190x45	Ø160-170	2130lm/2830lm	0.83	20PCS
CL59-8-18W/35W	18W/35W	Ø228x45	Ø200-210	1540lm/2790lm	0.94	10PCS
CL59-8-25W	25W	Ø228x45	Ø200-210	2130lm	0.94	10PCS
CL59-10-45W	45W	Ø280x52	Ø230-260	4170lm	1.60	10PCS
CL59-2-7W	7W	Ø80x39	Ø60-65	550lm	0.24	50PCS
CL59-2.5-7W	7W	Ø85x39.5	Ø68-75	680lm	0.26	50PCS
CL59-3-10W	10W	Ø100x38	Ø90-95	1110lm	0.28	24PCS
CL59-4-12W	12W	Ø145x45	Ø120-130	1480lm	0.59	30PCS
CL59-5-18W	18W	Ø170x45	Ø140-150	2300lm	0.70	30PCS
CL59-6-18W	18W	Ø190x45	Ø160-170	2250lm	0.83	20PCS
CL59-8-25W	25W	Ø228x45	Ø200-210	3150lm	0.94	10PCS
CL59-10-35W	35W	Ø280x52	Ø230-260	4680lm	1.60	10PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black — Silver — Chrome



DL137A



DL137B


DL422 Downlight



DL422 LED downlight adapts high lumen SMD with external driver design. It is power changeable version and CCT changeable is for your option. On/off, triac dim and DALI dim are available. IP54 waterproof provides great protection level.

Materials of Housing : Aluminium

Materials of Optics : PC

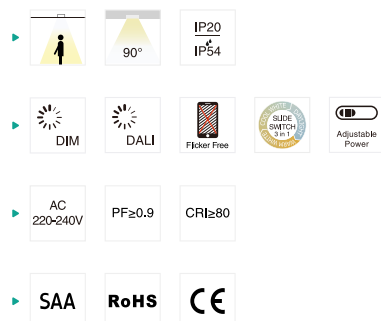

Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL422-3-13W	10W/13W	Ø115x52	90-95	1400lm	0.20	36PCS
DL422-4-15W	12W/15W	Ø145x55	120-130	1700lm	0.25	36PCS
DL422-5-25W	20W/25W	Ø170x60	140-150	2950lm	0.34	24PCS
DL422-6-25W	20W/25W	Ø190x62	160-170	3000lm	0.37	12PCS
DL422-8-35W	28W/35W	Ø235x67	200-210	4300lm	0.47	12PCS
DL422-10-40W	30W/40W	Ø280x78	230-260	5000lm	0.61	6PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black


DL137 Downlight



DL137A flat cover & DL137B step cover, super slim downlight. It adopts high lumen SMD LED with even light output. External driver is available for triac dim. It is IP54 for LED cover part and can do CCT changeable.

Materials of Housing : Aluminium Coated Plastic

Materials of Optics : PC



Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL137A-2.5-7W	7W	Ø85x30	Ø68-75	750lm	0.17	48PCS
DL137A-3-8W	8W	Ø110x30	Ø90-100	940lm	0.20	36PCS
DL137B-2.5-7W	7W	Ø85x36	Ø68-75	710lm	0.18	48PCS
DL137B-3-8W	8W	Ø110x36	Ø90-100	900lm	0.21	36PCS
DL137B-4-12W	12W	Ø145x46	Ø120-130	1480lm	0.36	24PCS
DL137B-4-16W	16W	Ø145x46	Ø120-130	1970lm	0.36	24PCS
DL137B-5-18W	18W	Ø170x46	Ø140-150	2250lm	0.42	12PCS
DL137B-6-18W	18W	Ø190x46	Ø160-170	2370lm	0.54	12PCS
DL137B-6-25W	25W	Ø190x46	Ø160-170	3180lm	0.54	12PCS
DL137B-6-30W	30W	Ø190x46	Ø160-170	4000lm	0.54	12PCS
DL137B-8-18W	18W	Ø235x46	Ø200-210	2430lm	0.72	12PCS
DL137B-8-25W	25W	Ø235x46	Ø200-210	3285lm	0.72	12PCS
DL137B-8-35W	35W	Ø235x46	Ø200-210	4420lm	0.72	12PCS

CCT — 3000K — 4000K — 5700K


Trim — White — Black



DL110 Downlight



DL110 LED downlight is with high lumen SMD LED. IP65 waterproof for indoor and outdoor use.



Materials of Housing : Aluminium
Materials of Optics : PMMA

Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL110-3-13W	13W	Ø115x55.5	Ø95-100	1320lm	0.40	24PCS
DL110-4-18W	18W	Ø155x67	Ø120-130	1830lm	0.61	24PCS
DL110-6-25W	25W	Ø195x46.5	Ø175-185	2550lm	0.75	12PCS
DL110-8-35W	35W	Ø235x54.5	Ø205-215	3570lm	1.08	12PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black




DL54 Downlight



DL54 LED downlight with SMD LED, internal driver for triac dimmable available. IP40/IP54 - available for choice. CCT switchable by slide switch is available.

Materials of Housing : Aluminium Coated Plastic
Materials of Optics : PMMA

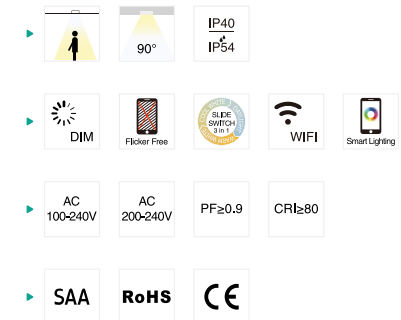

Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL54C-2.5-7W-P3	7W	Ø85x68	Ø68-75	700lm	0.12	50PCS
DL54C-3-8W	8W	Ø115x58	Ø90-95	750lm	0.20	30PCS
DL54C-3-8W-C3(P3)	8W	Ø115x61	Ø90-95	750lm	0.20	30PCS
DL54C-3-10W	10W	Ø115x58	Ø90-95	940lm	0.20	30PCS
DL54C-3-10W-C3(P3)	10W	Ø115x61	Ø90-95	940lm	0.20	30PCS
DL54B-4-13W	13W	Ø145x61	Ø120-130	1100lm	0.28	30PCS
DL54B-4-13W-C3(P3)	13W	Ø145x62.5	Ø120-130	1300lm	0.28	30PCS
DL54B-6-16W	16W	Ø190x74	Ø160-170	1550lm	0.51	30PCS
DL54B-6-16W-C3(P3)	16W	Ø190x75.5	Ø160-170	1760lm	0.41	30PCS
DL54B-8-20W	20W	Ø225x84	Ø200-210	1840lm	0.64	20PCS
DL54B-8-20W-C3(P3)	20W	Ø225x84	Ø200-210	2100lm	0.52	20PCS

CCT — 3000K — 4000K — 5700K

Trim — White

Ring — ACC-DL54 Nickel brushed




DL41 Downlight



DL41 LED downlight with SMD LED, internal driver for triac dimmable available. IP40/IP54 available for choice. CCT switchable by slide switch is available.

Materials of Housing : Aluminium Coated Plastic

Materials of Optics : PMMA

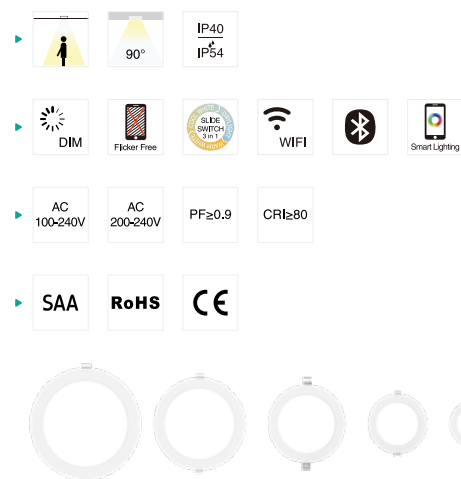

Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL41C-2.5-7W	7W	Ø85x55	Ø70-75	620lm	0.12	50PCS
DL41C-2.5-7W-C3(P3)	7W	Ø85x63	Ø70-75	650lm	0.12	50PCS
DL41C-3-8W	8W	Ø115x58	Ø90-95	750lm	0.20	30PCS
DL41C-3-8W-C3(P3)	8W	Ø115x61	Ø90-95	800lm	0.20	30PCS
DL41C-3-10W	10W	Ø115x58	Ø90-95	880lm	0.20	30PCS
DL41C-3-10W-C3(P3)	10W	Ø115x61	Ø90-95	940lm	0.20	30PCS
DL41B-4-13W	13W	Ø145x61	Ø120-130	1210lm	0.22	30PCS
DL41B-4-13W-C3(P3)	13W	Ø145x62.5	Ø120-130	1320lm	0.22	30PCS
DL41B-6-16W	16W	Ø190x74	Ø160-170	1670lm	0.51	30PCS
DL41B-6-16W-C3(P3)	16W	Ø190x75.5	Ø160-170	1840lm	0.51	30PCS
DL41B-8-20W-C3(P3)	20W	Ø225x84	Ø200-210	2200lm	0.64	20PCS

CCT — 3000K — 4000K — 5700K

Ring — ACC-DL41-2.5/ ACC-DL41-3 Nickel brushed

Trim — White




DL41-S1 Downlight



DL41-S1 LED downlight with PIR sensor function, SMD LED, internal driver. IP54 waterproof for cover. CCT switchable by slide switch is available.

Materials of Housing : Aluminium Coated Plastic

Materials of Optics : PC



Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL41-3-8W-S1	8W	Ø115x70	Ø90-95	690lm	0.20	30PCS
DL41-3-10W-S1	10W	Ø115x70	Ø90-95	830lm	0.20	30PCS

CCT — 3000K — 4000K — 5700K

Trim — White




DL317 Downlight



DL317 LED downlight adopts high lumen SMD LED, deep housing has been deepened to reduce the glare. Dimmable flicker free driver shares great popularity by the excellent dimming effect. Interchangeable CCT with slide switch is available, IP54 waterproof for front side.

Materials of Housing : Aluminium coated plastic
Materials of Optics : PC

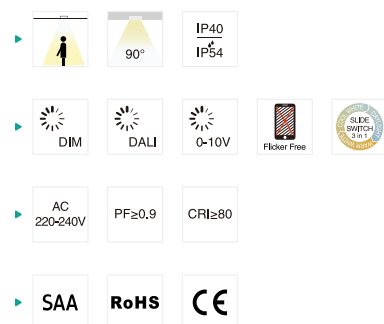

Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL317-3-10W	10W	Ø115x70.5	Ø90-95	910lm	0.20	30PCS
DL317-6-16W	16W	Ø190x102	Ø160-170	1660lm	0.40	12PCS
DL317-8-20W	20W	Ø240x117	Ø200-210	2250lm	0.56	12PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black




DL134 Downlight



DL134 LED downlight with SMD LED, internal driver. Deep trim design provides soft lighting. IP54 waterproof for internal use. CCT switchable by slide switch is available.

Materials of Housing : Aluminium Coated Plastic
Materials of Optics : PC

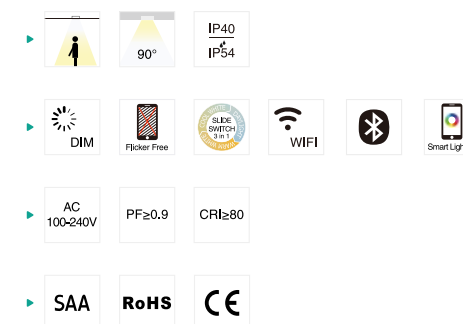


Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL134-3-10W	10W	Ø115x83.4	Ø90-95	880lm	0.17	36PCS
DL134-4-13W	13W	Ø145x97.5	Ø125-130	1230lm	0.25	24PCS
DL134-6-16W	16W	Ø190x115.3	Ø160-170	1720lm	0.40	12PCS
DL134-8-20W	20W	Ø240x132.5	Ø200-210	2150lm	0.55	12PCS

CCT — 3000K — 4000K — 5700K

Trim — White




DL222 Downlight



DL222 LED downlight with SMD LED, AC to DC internal driver, round shape design. Recessed and surface mounted installation are available. Adjustable cutout size from Ø65-205mm and Ø120-260mm for recessed installation, CCT and power is switchable for choice.

Materials of Housing : PC/Aluminium

Materials of Optics : PS

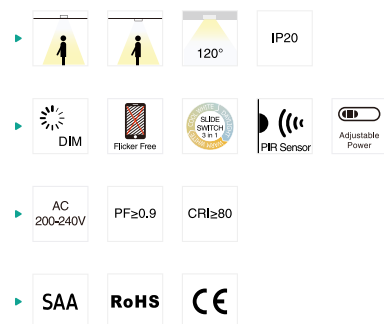


Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL222-8-16W	16W	Ø235x16	Ø65-205	1800lm	0.36	20PCS
DL222-8-16W-A3	10W/13W/16W	Ø235x16	Ø65-205	1800lm	0.36	20PCS
DL222-10-22W	22W	Ø300x20	Ø120-260	2600lm	0.68	10PCS
DL222-10-22W-A3	16W/20W/22W	Ø300x20	Ø120-260	2600lm	0.68	10PCS
DL222-10-22W-S	22W	Ø300x20	Ø120-260	2600lm	0.68	10PCS

CCT — 3000K — 4000K — 5700K

Trim — White




DL222B Downlight



DL222B LED downlight with SMD LED, AC to DC internal driver, square shape design. Recessed and surface mounted installation are available. Adjustable cutout size from Ø65-205mm and Ø120-260mm for recessed installation, CCT and power is switchable for choice.

Materials of Housing : PC/Aluminium

Materials of Optics : PS



Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL222B-8-16W	16W	235x235x16	Ø65-205	1800lm	0.55	20PCS
DL222B-8-16W-A3	10W/13W/16W	235x235x16	Ø65-205	1800lm	0.55	20PCS
DL222B-10-22W	22W	300x300x20	Ø120-260	2500lm	0.83	20PCS
DL222B-10-22W-A3	16W/20W/22W	300x300x20	Ø120-260	2500lm	0.83	20PCS

CCT — 3000K — 4000K — 5700K

Trim — White


Surface mounted to Recessed



DL280A



DL280B



DL280C



DL280D


DL280 Downlight



DL280 is a downlight with adjustable cutout from 65~205mm and 120~260mm for recessed installation. Super slim with internal driver and quick connector makes installation easy. Interchangeable CCT and power with slide switch are available. Triac dimmable and flicker free are used.

Materials of Housing : PC/Aluminium

Materials of Optics : PS



Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL280-8-16W	16W	Ø235x22	Ø65-205	1700lm	0.46	20PCS
DL280-10-22W	22W	Ø300x25	Ø120-260	2600lm	0.78	10PCS
DL280C-8-16W	16W	235x235x22	Ø65-205	1700lm	0.50	20PCS
DL280C-10-22W	22W	300x300x25	Ø120-260	2600lm	0.93	10PCS
DL280D-10-22W-SS	16W/20W/22W	Ø300x25.5	Ø120-260	2400lm	0.73	10PCS

CCT — 3000K — 4000K — 5700K

Trim — White




DL280A




DL280D
(PIR sensor)



DL280B

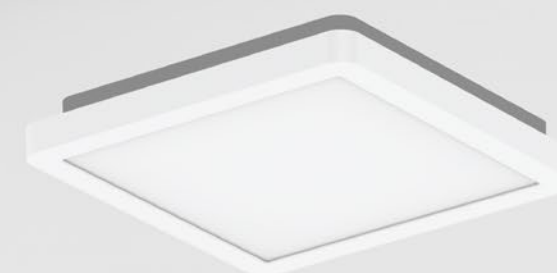

DL280C

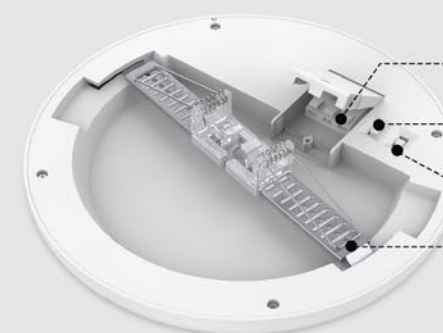


Quick connector design


Power changeable

CCT changeable (WW NW CW)


Adjustable cutout 65~205mm
120~260mm

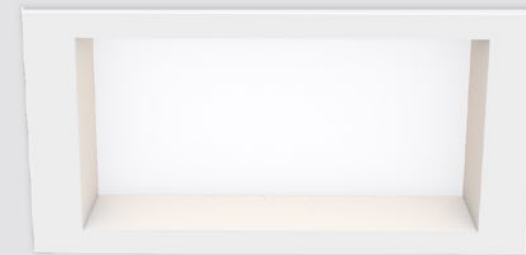

DL308B Downlight



DL308B LED downlight as square design is with high lumen SMD LED, external driver triac dimmable as option, IP54 protection level. CCT changeable by slide switch is available.



Materials of Housing : Aluminium


Materials of Optics : PC

Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL308B-3-10W	10W	110x110x52	90x90	1050lm	0.26	24PCS
DL308B-4-12W	12W	145x145x53	120x120	1560lm	0.40	18PCS
DL308B-4-18W	18W	145x145x53	120x120	2160lm	0.40	18PCS
DL308B-6-18W	18W	190x190x53	160x160	2195lm	0.58	12PCS
DL308B-6-25W	25W	190x190x53	160x160	2830lm	0.58	12PCS
DL308B-8-18W	18W	228x228x55	200x200	2450lm	0.92	6PCS
DL308B-8-25W	25W	228x228x55	200x200	3270lm	0.92	6PCS
DL308B-8-35W	35W	228x228x55	200x200	4380lm	0.92	6PCS


CCT — 3000K — 4000K — 5700K

Trim — White — Black

DL34 Downlight



DL34 LED downlight with high lumen SMD LED, square shape, external driver triac, 0~10V, DALI for option. IP20/IP44 waterproof available.

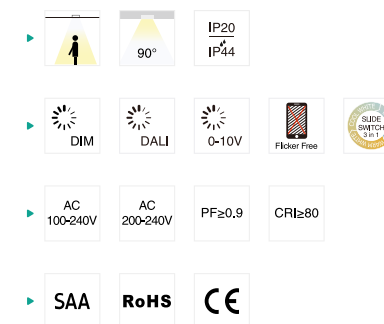

Materials of Housing : Aluminium

Materials of Optics : PMMA


Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL34-3-13W	13W	110x110x44	90-95	940lm	0.40	24PCS
DL34-6-25W	25W	190x190x54	160-170	2300lm	1.11	12PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black




DL96 Downlight



DL96 LED downlight with SMD LED with round shape design, internal driver. IP54 waterproof. Grilling design effectively reduce the UGR index. High lumen output 110lm/W. Push button looping connection terminal saves much installation time.

Materials of Housing : Aluminium


Materials of Optics : PC

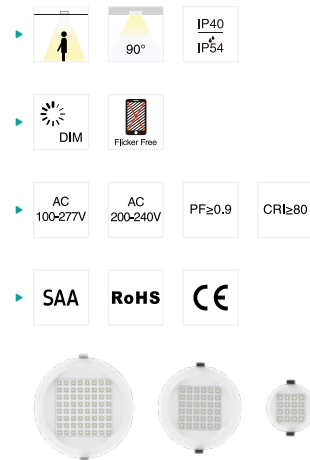

Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL96-3-10W	10W	Ø110x40	Ø90-95	1070lm	0.22	30PCS
DL96-6-18W	18W	Ø190x40	Ø160-170	2070lm	0.44	24PCS
DL96-8-25W	25W	Ø228x40	Ø200-210	3000lm	0.70	20PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Silver

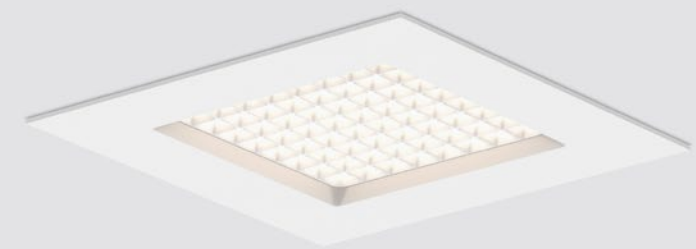


DL105 Downlight



DL105 LED downlight with SMD LED with square shape design, internal driver. IP54 waterproof. Grilling design effectively reduce the UGR index. High lumen output 110lm/W. Push button looping connection terminal saves much installation time.

Materials of Housing : Aluminium



Materials of Optics : PC

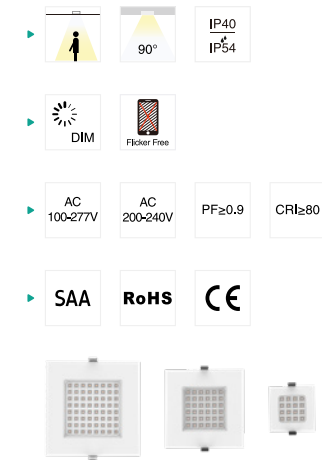

Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL105-3-10W	10W	110x110x39	90-95	1070lm	0.24	30PCS
DL105-6-18W	18W	190x190x43.5	160-170	2070lm	0.54	24PCS
DL105-8-25W	25W	228x228x43.5	200-210	3000lm	0.84	20PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Silver

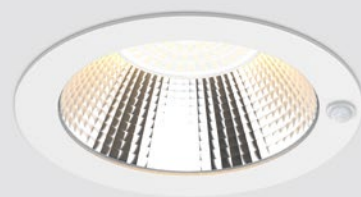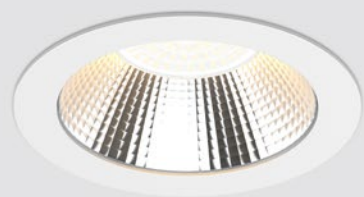


DL367 Downlight



DL367 SMD downlight is with high lumen efficiency 130lm/w as external driver, The concave design in front and reflector+lens optic combination reduced the height of the lamp and make it anti-glare. Besides, can do surface mounted with extra accessory for 4/6/8 inches. More function as CCT adjustable, sensor available, one lamp with multiple function use.

Materials of Housing : Aluminium die-casting

Materials of Optics : PC+Aluminium

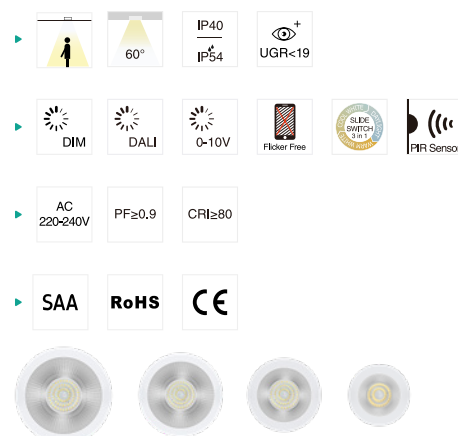

Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL367-4-9W	9W	Ø145x55	Ø120-130	1300lm	0.32	24PCS
DL367-4-12W	12W	Ø145x55	Ø120-130	1750lm	0.32	24PCS
DL367-5-11W	11W	Ø170x58	Ø140-150	1600lm	0.39	24PCS
DL367-5-16W	16W	Ø170x58	Ø140-150	2200lm	0.39	24PCS
DL367-6-12W	12W	Ø190x61	Ø160-170	1780lm	0.44	24PCS
DL367-6-18W	18W	Ø190x61	Ø160-170	2550lm	0.44	24PCS
DL367-6-24W	24W	Ø190x61	Ø160-170	3200lm	0.44	24PCS
DL367-8-12W	12W	Ø228x61	Ø200-210	1850lm	0.59	24PCS
DL367-8-18W	18W	Ø228x61	Ø200-210	2650lm	0.59	24PCS
DL367-8-24W	24W	Ø228x61	Ø200-210	3450lm	0.59	24PCS
DL367-6-9W-S1	9W	Ø180x63	Ø160-170	1300lm	0.6	12PCS
DL367-6-12W-S1	12W	Ø180x63	Ø160-170	1750lm	0.6	12PCS

CCT — 2700K — 3000K — 4000K

Trim — White — Black

Conversion housing



DL264 Downlight



DL264 LED downlight with anti-glare UGR<19 and external driver design. Adopting high lumen SMD light source 100lm/W, the scale PC shade and reflector make a uniform light output. Interchangeable CCT and IP54 in front are available.

Materials of Housing : PC/Aluminium

Materials of Optics : PC




Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL264-3-10W	10W	Ø115x67mm	Ø90-95mm	950lm	0.21	30PCS
DL264-3-13W	13W	Ø115x67mm	Ø90-95mm	1200lm	0.21	30PCS
DL264-4-13W	13W	Ø145x73mm	Ø120-130mm	1200lm	0.26	24PCS
DL264-4-18W	18W	Ø145x73mm	Ø120-130mm	1500lm	0.26	24PCS
DL264-5-13W	13W	Ø170x86mm	Ø140-150mm	1350lm	0.31	24PCS
DL264-5-18W	18W	Ø170x86mm	Ø140-150mm	1850lm	0.31	24PCS
DL264-5-25W	25W	Ø170x86mm	Ø140-150mm	2650lm	0.31	24PCS
DL264-6-18W	18W	Ø190x90mm	Ø160-170mm	1850lm	0.36	12PCS
DL264-6-25W	25W	Ø190x90mm	Ø160-170mm	2650lm	0.36	12PCS
DL264-6-30W	30W	Ø190x90mm	Ø160-170mm	3150lm	0.36	12PCS
DL264-8-18W	18W	Ø235x100mm	Ø200-210mm	1850lm	0.52	12PCS
DL264-8-25W	25W	Ø235x100mm	Ø200-210mm	2650lm	0.52	12PCS
DL264-8-35W	35W	Ø235x100mm	Ø200-210mm	3600lm	0.52	12PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black




DL405 Downlight



DL405 modular downlight, which realizes replaceable light source, optic lens and reflector, the light source module supports Zhaga standard. It keeps high efficiency 140lm/W and retains the deep design, which has UGR<19 anti glare effect.

Materials of Housing : Aluminium

Materials of Optics : PC+PMMA

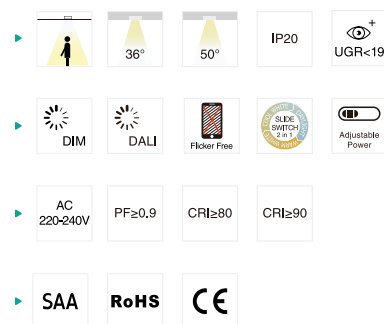


Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL405-6-18W	18W	Ø190x95	Ø155-170	2650lm	1.00	6PCS
DL405-6-20W	20W	Ø190x95	Ø155-170	2900lm	1.00	6PCS
DL405-6-22W	22W	Ø190x95	Ø155-170	3200lm	1.00	6PCS
DL405-6-25W	25W	Ø190x95	Ø155-170	3500lm	1.00	6PCS
DL405-6-30W	30W	Ø190x95	Ø155-170	4100lm	1.00	6PCS
DL405-6-30W-A5	18W/20W/22W/25W/30W	Ø190x95	Ø155-170	4100lm	1.00	6PCS
DL405-8-18W	18W	Ø240x99	Ø190-230	2650lm	1.35	6PCS
DL405-8-20W	20W	Ø240x99	Ø190-230	2900lm	1.35	6PCS
DL405-8-22W	22W	Ø240x99	Ø190-230	2350lm	1.35	6PCS
DL405-8-25W	25W	Ø240x99	Ø190-230	3500lm	1.35	6PCS
DL405-8-30W	30W	Ø240x99	Ø190-230	4200lm	1.35	6PCS
DL405-8-35W	35W	Ø240x99	Ø190-230	4750lm	1.35	6PCS
DL405-8-35W-A5	18W/20W/25W/30W/35W	Ø240x99	Ø190-230	4750lm	1.35	6PCS


CCT ——— 2700K ——— 3000K ——— 4000K

Trim ——— White ——— Black

Conversion ring



DL412 Downlight



DL412 LED downlight is deep reflector design, which could be UGR<19. It adopts high lumen SMD reaching to 120lm/W. IP54 waterproof and CCT changeable are available.

Materials of Housing : PC/Aluminum

Materials of Optics : PC



Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL412-3-8W	8W	Ø115x65	Ø90-95	900lm	0.23	30PCS
DL412-4-10W	10W	Ø145x77	Ø120-130	1300lm	0.29	24PCS
DL412-4-15W	15W	Ø145x77	Ø120-125	1700lm	0.29	24PCS
DL412-5-15W	15W	Ø170x92	Ø140-150	1750lm	0.35	24PCS
DL412-5-20W	20W	Ø170x92	Ø140-150	2450lm	0.35	24PCS
DL412-6-15W	15W	Ø190x97	Ø160-170	1800lm	0.42	12PCS
DL412-6-20W	20W	Ø190x97	Ø160-170	2500lm	0.42	12PCS
DL412-6-25W	25W	Ø190x97	Ø160-170	3000lm	0.42	12PCS
DL412-8-18W	18W	Ø235x111	Ø200-210	2400lm	0.64	12PCS
DL412-8-25W	25W	Ø235x111	Ø200-210	3200lm	0.64	12PCS
DL412-8-30W	30W	Ø235x111	Ø200-210	4100lm	0.64	12PCS

CCT ——— 3000K ——— 4000K ——— 5700K

Trim ——— White ——— Black



DL98A/B Downlight




DL98 integrated SMD LED downlight series, which is a high-performance LED downlight for accenting and general lighting, it has two reflector design optional, DL98A with faceted reflector and DL98B with specular reflector. The luminaire is easy to install with the combination of integrated driver and fast connector. Triac dimmable and 3CCT are available.

Reflector



Materials of Housing : PC
Materials of Optics : PC

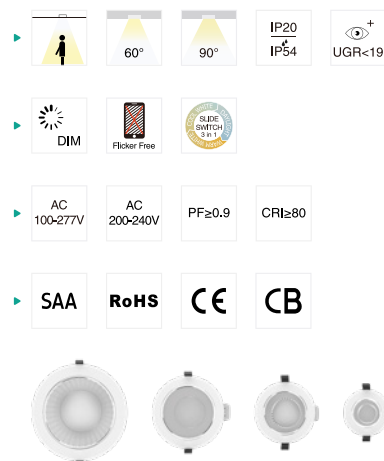

Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL98A-3-6W	6W	Ø110x70	90-95	650lm	0.18	24PCS
DL98A-4-13W	13W	Ø145x82	125-135	1500lm	0.28	24PCS
DL98A-6-18W	18W	Ø172x95	150-165	2050lm	0.35	12PCS
DL98A-8-18W	18W	Ø228x98	200-210	2100lm	0.54	12PCS
DL98A-8-25W	25W	Ø228x98	200-210	3000lm	0.54	12PCS
DL98B-3-6W	6W	Ø110x70	90-95	650lm	0.18	24PCS
DL98B-4-13W	13W	Ø145x82	125-135	1500lm	0.28	24PCS
DL98B-6-18W	18W	Ø172x95	150-165	2050lm	0.35	12PCS
DL98B-8-18W	18W	Ø228x98	200-210	2100lm	0.54	12PCS
DL98B-8-25W	25W	Ø228x98	200-210	3000lm	0.54	12PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black

DL138A/B Downlight




DL138 SMD LED downlight uses slide switch for color selection and is good for home and commercial project requirement. IP54 is available for bathroom and other wet locations. DL98B is 60° beam angle with specular reflector can reach UGR<19.

Reflector



Materials of Housing : PC
Materials of Optics : PC

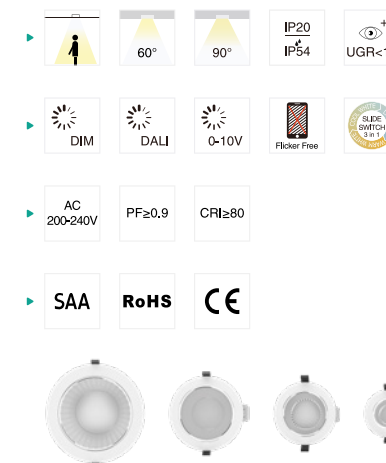


Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL138A-3-6W	6W	Ø110x70	90-95	650lm	0.24	24PCS
DL138A-4-13W	13W	Ø145x82	125-135	1500lm	0.34	24PCS
DL138A-6-18W	18W	Ø172x95	150-165	2050lm	0.45	12PCS
DL138A-8-18W	18W	Ø228x98	200-210	2100lm	0.65	12PCS
DL138A-8-25W	25W	Ø228x98	200-210	3000lm	0.65	12PCS
DL138B-3-6W	6W	Ø110x70	90-95	650lm	0.24	24PCS
DL138B-4-13W	13W	Ø145x82	125-135	1500lm	0.34	24PCS
DL138B-6-18W	18W	Ø172x95	150-165	2050lm	0.45	12PCS
DL138B-8-18W	18W	Ø228x98	200-210	2100lm	0.65	12PCS
DL138B-8-25W	25W	Ø228x98	200-210	3000lm	0.65	12PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black





DL83 Downlight



DL83 SMD downlight, a high-performance LED downlight for accenting and general lighting. The luminaire provides enhanced glare control and leading performance, making it ideal for commercial and residential environments.

Materials of Housing : Aluminium

Materials of Optics : PMMA



Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL83-3-13W	13W	Ø110x80	Ø90-100	1160lm	0.33	30PCS
DL83-6-25W	25W	Ø190x100	Ø160-180	2620lm	0.76	12PCS
DL83-8-35W	35W	Ø230x110	Ø200-220	3700lm	0.98	12PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black




DL268A



DL268B



DL268 Downlight



DL268 LED downlight is a traditional design with deep reflector, adopting high lumen SMD LED, providing a perfect combination of high lighting efficiency and comfortable lighting. Standard frame and invisible frame for option, complete size from 2.5inch to 10inch. UGR<19 for option, CCT changeable function is available. IP54 waterproof for room side.

Materials of Housing : Die-casting Aluminium


Materials of Optics : PC

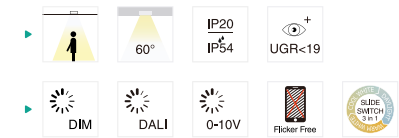


Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL268A/B-2.5-8W	8W	Ø95x55	Ø82-88	750lm	0.27	36PCS
DL268A/B-3-10W	10W	Ø108x55	Ø90-95	800lm	0.29	36PCS
DL268A/B-4-10W	10W	Ø145x77	Ø125-135	1100lm	0.58	18PCS
DL268A/B-4-18W	18W	Ø145x77	Ø125-135	1900lm	0.58	18PCS
DL268A/B-6-18W	18W	Ø172x90	Ø150-165	1900lm	0.69	12PCS
DL268A/B-6-25W	25W	Ø172x90	Ø150-165	2800lm	0.69	12PCS
DL268A/B-8-18W	18W	Ø228x107	Ø200-210	2000lm	1.13	12PCS
DL268A/B-8-25W	25W	Ø228x107	Ø200-210	3000lm	1.13	12PCS
DL268A/B-8-35W	35W	Ø228x107	Ø200-210	4000lm	1.13	12PCS
DL268A/B-8-40W	40W	Ø228x107	Ø200-210	4300lm	1.13	12PCS
DL268A/B-10-35W	35W	Ø280x123	Ø230-260	4100lm	1.55	6PCS
DL268A/B-10-45W	45W	Ø280x123	Ø230-260	5000lm	1.55	6PCS
DL268A/B-10-50W	50W	Ø280x123	Ø230-260	5300lm	1.55	6PCS
DL268A/B-4-10W	10W	Ø145x77	Ø125-135	1150lm	0.58	18PCS
DL268A/B-4-13W	13W	Ø145x77	Ø125-135	1400lm	0.58	18PCS
DL268A/B-6-18W	18W	Ø172x90	Ø150-165	2120lm	0.69	12PCS
DL268A/B-8-18W	18W	Ø228x107	Ø200-210	2160lm	1.13	12PCS
DL268A/B-8-25W	25W	Ø228x107	Ø200-210	3050lm	1.13	12PCS
DL268A/B-8-32W	32W	Ø228x107	Ø200-210	3880lm	1.13	12PCS
DL268A/B-10-32W	32W	Ø280x123	Ø230-260	3950lm	1.55	6PCS
DL268A/B-10-42W	42W	Ø280x123	Ø230-260	5100lm	1.55	6PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black




		IP20 IP54
		
AC 200-240V	PF≥0.9	CRI≥80
		

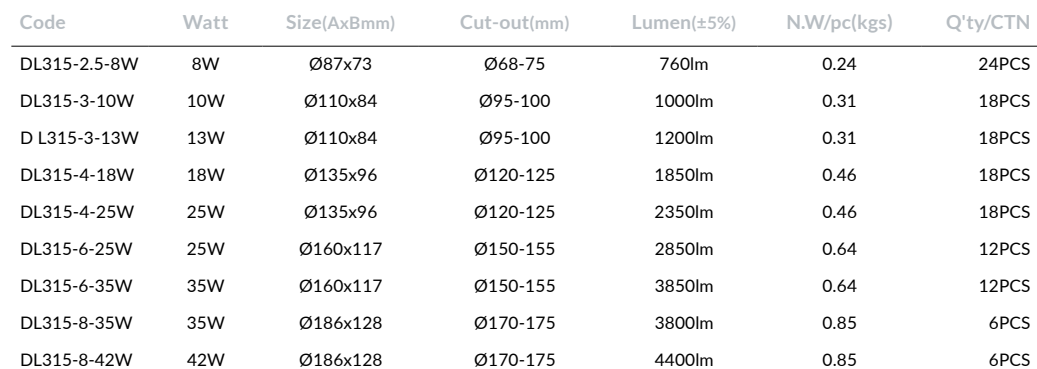

Trim ☐ White ☒ Black

This diagram illustrates the exploded view of a lighting fixture assembly. At the top is the main housing, a cylindrical component with vertical cooling fins and two mounting brackets. Below it are three separate components: a circular mesh grille on the left, a circular reflector cup in the center, and a circular trim ring on the right. Dashed lines with arrows indicate the assembly path, showing how these components fit together to form the complete fixture.


ACC-DL315
Standard Lumen



GLOWING EFFECT



DL179 Downlight



DL179 SMD LED downlight, designed with a traditional deep reflector, which provides perfect and comfortable lighting. External driver solution both in dimmable and non-dimmable version achieves great dimming compatibility with world brand dimmers.

Reflector




Materials of Housing : Die-casting Aluminium

Materials of Optics : PC

Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL179A-3-10W	10W	Ø95x54	Ø82-88	830lm	0.23	36PCS
DL179A-3-10W	10W	Ø95x54	Ø82-88	1030lm	0.23	36PCS
DL179B-3-10W	10W	Ø110x54	Ø90-95	870lm	0.27	36PCS
DL179B-3-10W	10W	Ø110x54	Ø90-95	1040lm	0.27	36PCS
DL179B-3-13W	13W	Ø110x54	Ø90-95	1140lm	0.27	36PCS
DL179-4-10W	10W	Ø145x78	Ø125-135	900lm	0.46	18PCS
DL179-4-12W	12W	Ø145x78	Ø125-135	1390lm	0.46	18PCS
DL179-4-18W	18W	Ø145x78	Ø125-135	1950lm	0.46	18PCS
DL179-4-25W	25W	Ø145x78	Ø125-135	2250lm	0.46	18PCS
DL179-6-18W	18W	Ø172x90	Ø150-165	1900lm	0.67	12PCS
DL179-6-18W	18W	Ø172x90	Ø150-165	2250lm	0.67	12PCS
DL179-6-25W	25W	Ø172x90	Ø150-165	2650lm	0.67	12PCS
DL179-6-35W	35W	Ø172x90	Ø150-165	3180lm	0.67	12PCS
DL179-8-18W	18W	Ø228x99	Ø200-210	2070lm	1.08	12PCS
DL179-8-25W	25W	Ø228x99	Ø200-210	2800lm	1.08	12PCS
DL179-8-25W	25W	Ø228x99	Ø200-210	3000lm	1.08	12PCS
DL179-8-35W/40W/45W	35W/40W/45W	Ø228x99	Ø200-210	4000lm/4400lm/4950lm	1.08	12PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black

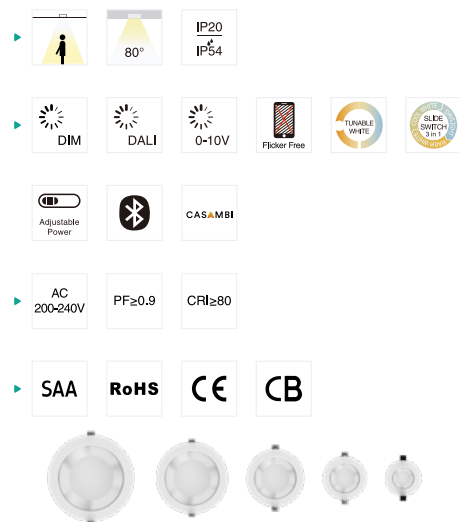

DL179 Narrow Trim



DL179 SMD LED downlight, designed with a traditional deep reflector and die-casting housing, provides perfect and comfortable lighting and excellent thermal dissipation. External driver solution both in dimmable and non-dimmable version achieves great dimming compatibility with world brand dimmers.

Reflector




Materials of Housing : Aluminium


Materials of Optics : PC

Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL179B-3-10W	10W	Ø100x54	Ø90	870lm	0.23	36PCS
DL179B-3-13W	13W	Ø100x54	Ø90	1140lm	0.27	36PCS
DL179-4-10W	10W	Ø130x78	Ø120	900lm	0.46	18PCS
DL179-4-18W	18W	Ø130x78	Ø120	1950lm	0.46	18PCS
DL179-4-25W	25W	Ø130x78	Ø120	2250lm	0.46	18PCS
DL179-6-18W	18W	Ø160x90	Ø150	1900lm	0.67	12PCS
DL179-6-25W	25W	Ø160x90	Ø150	2650lm	0.67	12PCS
DL179-6-35W	35W	Ø160x90	Ø150	3180lm	0.67	12PCS
DL179-8-18W	18W	Ø210x99	Ø200	2070lm	1.08	12PCS
DL179-8-25W	25W	Ø210x99	Ø200	2800lm	1.08	12PCS
DL179-8-35W	35W	Ø210x99	Ø200	4000lm	1.08	12PCS
DL179-8-40W	40W	Ø210x99	Ø200	4400lm	1.08	12PCS
DL179-8-45W	45W	Ø210x99	Ø200	4500lm	1.08	12PCS


CCT — 3000K — 4000K — 5700K

Trim — White — Black

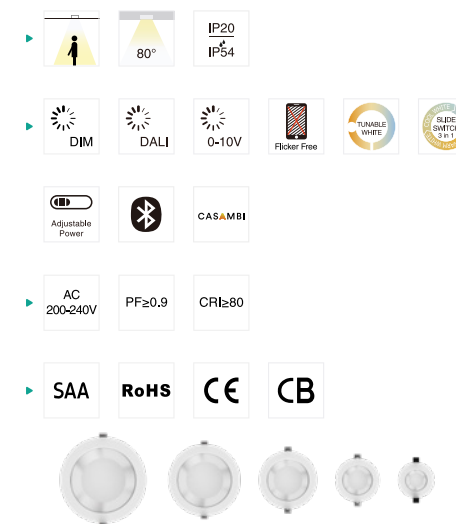

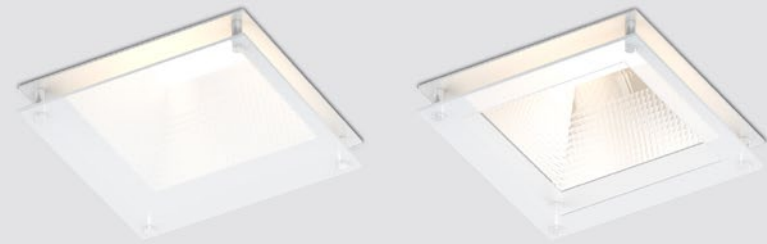

DL179 Downlight Drop-glass

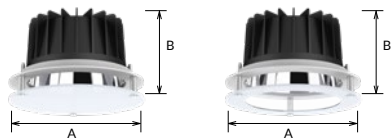


DL179 deep reflector downlight with decorative frosted glass ring and frosted glass cover options. It provides a softer light output and back light effect. The decorative glass ring or frame are very easy to disassemble. The light effect of the glass cover will be 12~18% lower than standard cover.

Reflector



Materials of Housing : Die-casting Aluminium
Materials of Optics : PC+Tempered glass

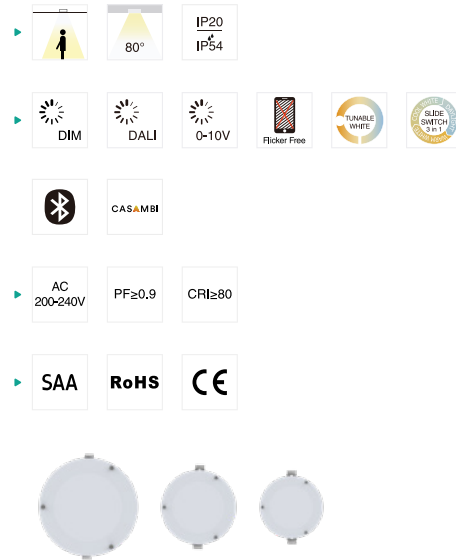


Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL179-4-10W	10W	145x97	Ø125-135	900lm	1.05	18PCS
DL179-4-18W	18W	145x97	Ø125-135	1950lm	1.05	18PCS
DL179-4-25W	25W	145x97	Ø125-135	2250lm	1.05	18PCS
DL179-6-18W	18W	172x109	Ø150-165	1900lm	1.30	12PCS
DL179-6-25W	25W	172x109	Ø150-165	2650lm	1.30	12PCS
DL179-6-35W	35W	172x109	Ø150-165	3180lm	1.30	12PCS
DL179-8-18W	18W	228x118	Ø200-210	2070lm	1.84	6PCS
DL179-8-25W	25W	228x118	Ø200-210	2800lm	1.84	6PCS
DL179-8-35W	35W	228x118	Ø200-210	4000lm	1.84	6PCS
DL179-8-40W	40W	228x118	Ø200-210	4400lm	1.84	6PCS
DL179-8-45W	45W	228x118	Ø200-210	4950lm	1.84	6PCS

CCT — 3000K — 4000K — 5700K


Trim — White — Black

DL197 Downlight Drop-glass

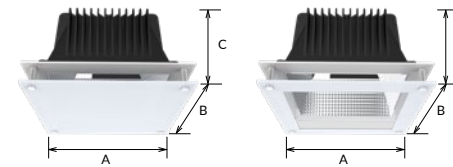

DL197 deep reflector downlight with decorative frosted glass ring and frosted glass cover options. It provides a softer light output and back light effect. The decorative glass ring or frame are very easy to disassemble. The light effect of the glass cover will be 12% lower than standard cover.


Materials of Housing : Die-casting Aluminium
Materials of Optics : PC+Tempered glass

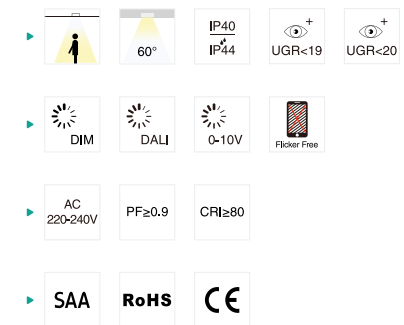


Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL197-6-18W	18W	190x190x127	170x170	1400lm	1.73	6PCS
DL197-6-22W	22W	190x190x127	170x170	1869lm	1.73	6PCS
DL197-6-25W	25W	190x190x127	170x170	2165lm	1.73	6PCS
DL197-6-32W	32W	190x190x127	170x170	2833lm	1.73	6PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black

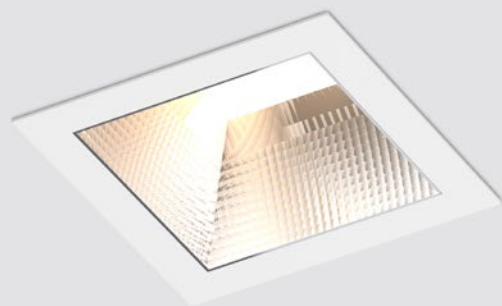


DL197 Downlight



DL197 SMD LED downlight is a square-trim LED downlight for accenting and comfortable lighting. Designed with a traditional deep reflector, the luminaire offers enhanced glare control(UGR<19). IP44 waterproof in front for various application.

Materials of Housing : Die-casting Aluminium

Materials of Optics : PMMA

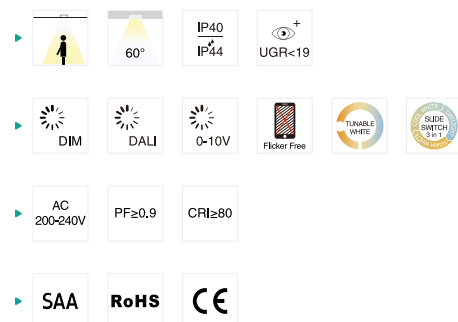


Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL197-6-18W	18W	190x190x102	170x170	1760lm	1.02	8PCS
DL197-6-22W	22W	190x190x102	170x170	2120lm	1.02	8PCS
DL197-6-25W	25W	190x190x102	170x170	2420lm	1.02	8PCS
DL197-6-32W	32W	190x190x102	170x170	3070lm	1.02	8PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black



DL178 Downlight Drop-glass

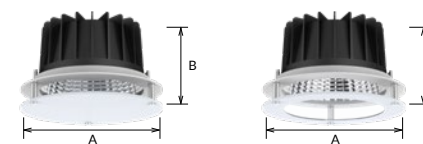


DL178 deep reflector downlight with decorative frosted glass ring and frosted glass cover options. It provides a softer light output and back light effect. The decorative glass ring or frame are very easy to disassemble. The light effect of the glass cover will be 12~18% lower than standard cover.

Reflector



Materials of Housing : Aluminium

Materials of Optics : PC+Tempered glass

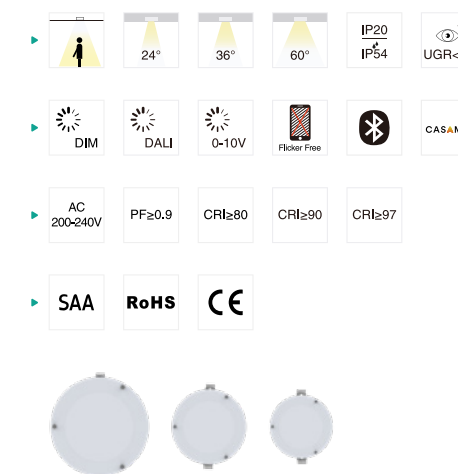

Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL178-4-10W	10W	Ø145x97	Ø125-135	1012lm	1.05	18PCS
DL178-4-18W	18W	Ø145x97	Ø125-135	1980lm	1.05	18PCS
DL178-4-25W	25W	Ø145x97	Ø125-135	2420lm	1.05	18PCS
DL178-6-18W	18W	Ø172x109	Ø150-165	1936lm	1.30	12PCS
DL178-6-25W	25W	Ø172x109	Ø150-165	2508lm	1.30	12PCS
DL178-6-35W	35W	Ø172x109	Ø150-165	3230lm	1.30	12PCS
DL178-8-18W	18W	Ø228x118	Ø200-210	1822lm	1.84	6PCS
DL178-8-25W	25W	Ø228x118	Ø200-210	2508lm	1.84	6PCS
DL178-8-35W	35W	Ø228x118	Ø200-210	3520lm	1.84	6PCS

CCT — 2700K — 3000K — 4000K

Trim — White — Black



DL178 Downlight




DL178 downlight with deep-set reflector provides better glaring control(UGR<19).The luminaire with modular design offers a wide choice of beam angles, 24°/36°/60°for optional. Adopted COB CITIZEN brand to reach high efficiency 110lm/W and energy saving. The luminaire blends harmoniously into ceilings, making it ideal for commercial and residential applications.

Reflector



Materials of Housing : Aluminium

Materials of Optics : PC

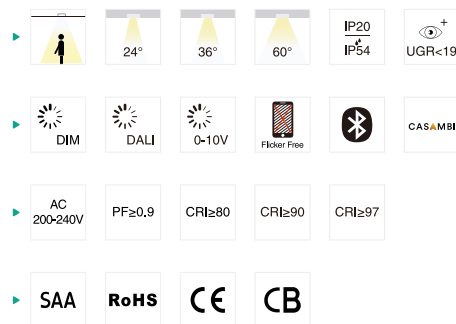


Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL178A-3-10W	10W	Ø95x54	Ø82-88	1120lm	0.23	36PCS
DL178B-3-10W	10W	Ø110x54	Ø90-95	1120lm	0.27	36PCS
DL178B-3-13W	13W	Ø110x54	Ø90-95	1300lm	0.27	36PCS
DL178-4-10W	10W	Ø145x78	Ø125-135	1150lm	0.48	18PCS
DL178-4-18W	18W	Ø145x78	Ø125-135	2250lm	0.48	18PCS
DL178-4-25W	25W	Ø145x78	Ø125-135	2750lm	0.48	18PCS
DL178-6-18W	18W	Ø172x90	Ø150-165	2200lm	0.71	12PCS
DL178-6-25W	25W	Ø172x90	Ø150-165	2850lm	0.71	12PCS
DL178-6-35W	35W	Ø172x90	Ø150-165	3670lm	0.71	12PCS
DL178-8-18W	18W	Ø228x99	Ø200-210	2070lm	1.14	12PCS
DL178-8-25W	25W	Ø228x99	Ø200-210	2850lm	1.14	12PCS
DL178-8-35W	35W	Ø228x99	Ø200-210	4000lm	1.14	12PCS

CCT — 2700K — 3000K — 4000K

Trim — White — Black



DL178 Narrow Trim




DL178 downlight with deep-set reflector provides better glaring control(UGR<19). The luminaire with modular design offers a wide choice of beam angles, 24°/36°/60°for optional. Adopted COB CITIZEN brand to reach high efficiency 110lm/W and energy saving. The luminaire blends harmoniously into ceilings, making it ideal for commercial and residential applications.

Reflector



Materials of Housing : Aluminium


Materials of Optics : PC

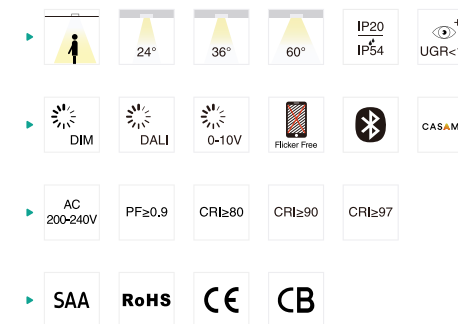


Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL178B-3-10W	10W	Ø100x54	Ø90	1120lm	0.27	36PCS
DL178-3-13W	13W	Ø100x54	Ø90	1300lm	0.27	36PCS
DL178-4-10W	10W	Ø130x78	Ø120	1150lm	0.48	18PCS
DL178-4-18W	18W	Ø130x78	Ø120	2250lm	0.48	18PCS
DL178-4-25W	25W	Ø130x78	Ø120	2750lm	0.48	18PCS
DL178-6-18W	18W	Ø160x90	Ø150	2200lm	0.70	12PCS
DL178-6-25W	25W	Ø160x90	Ø150	2850lm	0.70	12PCS
DL178-6-35W	35W	Ø160x90	Ø150	3670lm	0.70	12PCS
DL178-8-18W	18W	Ø210x99	Ø200	2070lm	1.11	12PCS
DL178-8-25W	25W	Ø210x99	Ø200	2850lm	1.11	12PCS
DL178-8-35W	35W	Ø210x99	Ø200	3900lm	1.11	12PCS

CCT — 2700K — 3000K — 4000K

Trim — White — Black

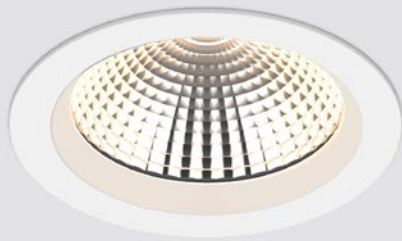


DL229 Downlight



DL229 commercial downlight adopts high power COB LED chip, reflector and tempered glass. External driver is exchangeable through quick connector among non-dimmable driver, Triac dimmable, 0-10V and DALI dimmable drivers.

Materials of Housing : Die-casting Aluminium/PC
Materials of Optics : PC+Tempered glass

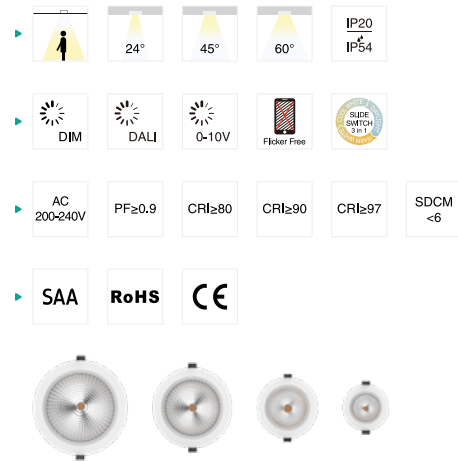


Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL229-3-10W	10W	Ø110x53	Ø90-95	988lm	0.25	30PCS
DL229-3-10W	10W	Ø110x53	Ø90-95	1250lm	0.33	30PCS
DL229-3-12W	12W	Ø110x53	Ø90-95	1312lm	0.25	30PCS
DL229-4-12W	12W	Ø145x65	Ø120-130	1485lm	0.41	20PCS
DL229-4-18W	18W	Ø145x65	Ø120-130	1997lm	0.41	20PCS
DL229-4-18W	18W	Ø145x65	Ø120-130	2300lm	0.50	20PCS
DL229-4-25W	25W	Ø145x65	Ø120-130	2733lm	0.41	20PCS
DL229-6-18W	18W	Ø190x75	Ø160-170	2079lm	0.69	12PCS
DL229-6-25W	25W	Ø190x75	Ø160-170	2798lm	0.69	12PCS
DL229-6-25W	25W	Ø190x75	Ø160-170	3200lm	0.77	12PCS
DL229-6-33W	33W	Ø190x75	Ø160-170	3674lm	0.69	12PCS
DL229-8-18W	18W	Ø225x87	Ø200-210	2066lm	0.96	12PCS
DL229-8-25W	25W	Ø225x87	Ø200-210	2801lm	0.96	12PCS
DL229-8-30W	30W	Ø225x87	Ø200-210	4000lm	1.08	12PCS
DL229-8-33W	33W	Ø225x87	Ø200-210	3659lm	0.96	12PCS
DL229-8-42W	42W	Ø225x87	Ø200-210	4823lm	0.96	12PCS

CCT — 2700K — 3000K — 4000K

Trim — White — Black



DL22 Downlight



DL22 the most classic commercial downlight adopts brand CITIZEN and Bridgelux COB, reflector and tempered glass. External driver is exchangeable through quick connector among non-dimmable driver, Triac dimmable, 0-10V and DALI dimmable drivers. Tunable White option adopts dual color temperature COB and dual DALI driver, supports the concept of Human Centric Lighting (HCL), widely applicable in health care center, nursing home, school etc.

Materials of Housing : Die-casting Aluminium
Materials of Optics : PC+Tempered glass



Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL22-3-10W	10W	Ø110x53	Ø90-100	800lm	0.35	30PCS
DL22-3-10W	10W	Ø110x53	Ø90-95	1250lm	0.35	30PCS
DL22-3-13W	13W	Ø110x53	Ø90-100	1100lm	0.35	30PCS
DL22-4-18W	18W	Ø145x65	Ø120-130	2105lm	0.85	20PCS
DL22-4-18W	18W	Ø145x65	Ø120-130	2300lm	0.81	20PCS
DL22-4-25W	25W	Ø145x65	Ø120-130	2750lm	0.85	20PCS
DL22-6-18W	18W	Ø190x75	Ø160-170	2160lm	1.04	12PCS
DL22-6-25W	25W	Ø190x75	Ø160-170	2875lm	1.04	12PCS
DL22-6-25W	25W	Ø190x75	Ø160-170	3200lm	1.04	12PCS
DL22-6-35W	35W	Ø190x75	Ø160-170	3955lm	1.08	12PCS
DL22-6-45W	45W	Ø190x75	Ø160-170	4770lm	1.08	12PCS
DL22-8-30W	30W	Ø225x87	Ø200-210	4000lm	1.48	12PCS
DL22-8-18W	18W	Ø225x87	Ø200-210	2160lm	1.48	12PCS
DL22-8-25W	25W	Ø225x87	Ø200-210	2875lm	1.48	12PCS
DL22-8-35W	35W	Ø225x87	Ø200-210	3955lm	1.48	12PCS
DL22-8-45W	45W	Ø225x87	Ø200-210	4770lm	1.48	12PCS

CCT — 2700K — 3000K — 4000K

Trim — White — Black — Silver




DL288 Downlight



DL288 LED downlight is unique designed with reflector and COB high power LED chip. LED module design could save SKU and offer an easy module replacement. Dimmable flicker free driver shares great popularity by the excellent dimming effect. IP54 waterproof for front part.

Materials of Housing : Die-casting Aluminium

Materials of Optics : Aluminium + Tempered Glass




Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL288-2.5-10W	10W	Ø90x60	75-83	1180lm	0.25	36PCS
DL288-6-18W	18W	Ø172x96	150-160	2290lm	0.78	12PCS
DL288-6-25W	25W	Ø172x96	150-160	3070lm	0.78	12PCS
DL288-8-25W	25W	Ø228x125	195-210	3070lm	1.26	12PCS
DL288-8-30W	30W	Ø228x125	195-210	3600lm	1.26	12PCS


CCT — 2700K — 3000K — 4000K

Conversion ring —

Trim — White Black

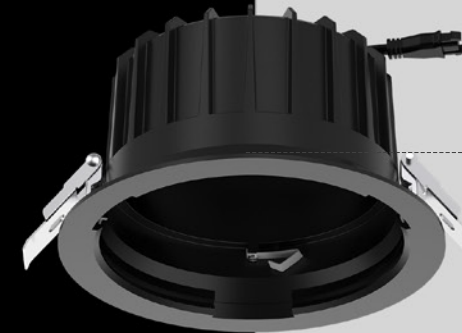


ADC12 Aluminum housing



ACC-DL288

- 2700K/3000K/4000K optional
- CRI80/90/97 optional
- Different lighting efficiency level optional

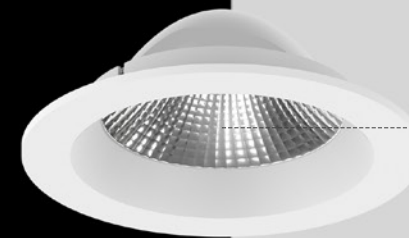

IP54

LIGHT SOURCE INTERCHANGEABLE



DL399 Downlight



DL399 is LED modular downlight with DIY replaceable optial trim, drivers, COB and housing. 2CCT and tunable white are available. IP54 waterproof for wet locations.

Materials of Housing : Die-casting Aluminium

Materials of Optics : PC



Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL399-4-10W	10W	Ø139x87	Ø120	1200lm	0.89	12PCS
DL399-4-13W	13W	Ø139x87	Ø120	1560lm	0.89	12PCS
DL399-4-18W	18W	Ø139x87	Ø120	2160lm	0.89	12PCS
DL399-6-18W	18W	Ø180x103	Ø160	2160lm	1.20	12PCS
DL399-6-25W	25W	Ø180x103	Ø160	3000lm	1.20	12PCS
DL399-6-30W	30W	Ø180x103	Ø160	3600lm	1.20	12PCS

CCT ——— 2700K 3000K 4000K Trim ——— White Black



Decorative kits




MODULAR
Design DL399

UGR<19




DL326 Downlight

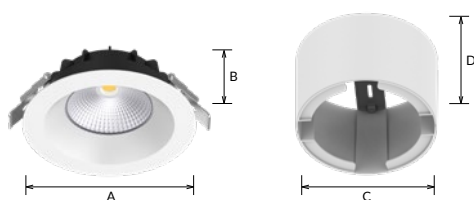

DL326 is a super slim COB downlight, which can be recessed and surface mounted with extra accessory, 4", 6", 8" .

Materials of Housing : Die-casting Aluminium
Materials of Optics : Reflector+Tempered glass



Code	Watt	Size(AxB/CxDmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL326-2.5-6W	6W	Ø85x36	Ø68-75	620lm	0.19	36PCS
DL326-3-10W	10W	Ø110x45	Ø90-95	1000lm	0.26	36PCS
DL326-3-13W	13W	Ø110x45	Ø90-95	1330lm	0.26	36PCS
DL326-4-13W	13W	Ø145x52	Ø120-130	1380lm	0.39	30PCS
DL326-4-18W	18W	Ø145x52	Ø120-130	1990lm	0.39	30PCS
DL326-6-18W	18W	Ø190x52	Ø160-170	2290lm	0.58	20PCS
DL326-6-25W	25W	Ø190x52	Ø160-170	3080lm	0.58	20PCS
DL326-8-18W	18W	Ø228x59	Ø200-210	2160lm	0.78	12PCS
DL326-8-25W	25W	Ø228x59	Ø200-210	2990lm	0.78	12PCS
DL326-8-35W	35W	Ø228x59	Ø200-210	3860lm	0.78	12PCS
ACC-DL326-4-WT	-	Ø148x93	-	-	0.34	24PCS
ACC-DL326-6-WT	-	Ø193x93	-	-	0.43	12PCS
ACC-DL326-8-WT	-	Ø232x93	-	-	0.53	12PCS

CCT — 2700K — 3000K — 4000K

Conversion ring — ACC-DL326-4-WT ACC-DL326-6-WT ACC-DL326-8-WT


Trim — White — Black

CL94 Downlight



CL94 LED downlight designed with a deep reflector, provides optimal glare control(UGR<19). It adopts brand CITIZEN COB for uniform and accenting lighting. Ideal for commercial and residential applications looking for a clean, minimalist look.

Materials of Housing : Die-casting Aluminium
Materials of Optics : Aluminium

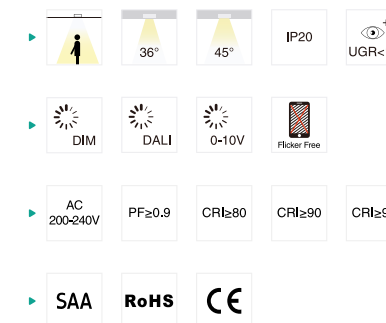


Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
CL94-3-13W	13W	Ø110x100	Ø95-100	920lm	0.38	24PCS
CL94-6-25W	25W	Ø190x127	Ø165-180	2550lm	0.85	12PCS
CL94-8-35W	35W	Ø230x140	Ø205-220	3350lm	1.20	12PCS

CCT — 2700K — 3000K — 4000K

Trim — White — Black — Silver




DL361 Downlight



DL361 Led downlight is a deep reflector design, it has a wider shielding angle which can lower the glare and reach UGR<19. Adopt bridgelux brand COB light source, CRI>90 for a more real lighting effect. Transparent tempered glass provides great light transmittance.

Materials of Housing : Die-casting Aluminium

Materials of Optics : Aluminium + PC

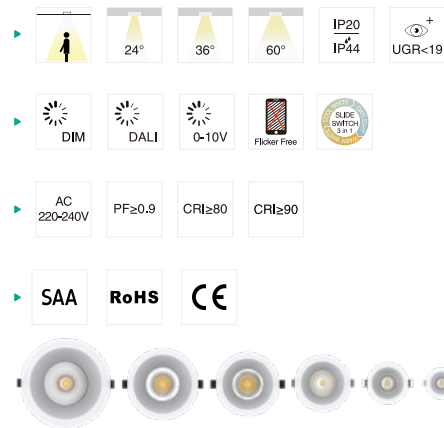

Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL361-2.5-7W	7W	Ø85xH56	Ø68-75	630lm	0.20	48PCS
DL361-3-10W	10W	Ø110xH75	Ø90-100	1100lm	0.30	48PCS
DL361-4-13W	13W	Ø150xH97	Ø120-130	1400lm	0.44	24PCS
DL361-4-18W	18W	Ø150xH97	Ø120-130	1770lm	0.44	24PCS
DL361-5-18W	18W	Ø170xH112	Ø140-150	2020lm	0.61	24PCS
DL361-5-25W	25W	Ø170xH112	Ø140-150	2700lm	0.61	24PCS
DL361-6-18W	18W	Ø190xH120	Ø160-170	2020lm	0.70	12PCS
DL361-6-25W	25W	Ø190xH120	Ø160-170	2700lm	0.70	12PCS
DL361-6-30W	30W	Ø190xH120	Ø160-170	3000lm	0.70	12PCS
DL361-8-18W	18W	Ø240xH142	Ø195-230	2020lm	0.93	6PCS
DL361-8-25W	25W	Ø240xH142	Ø195-230	2700lm	0.93	6PCS
DL361-8-35W	35W	Ø240xH142	Ø195-230	3400lm	0.93	6PCS
DL361-8-40W	40W	Ø240xH142	Ø195-230	4080lm	0.93	6PCS

CCT ——— 2700K ——— 3000K ——— 4000K

Trim ——— White ——— Black

2.5" 3" 4" 5" 6" 8"



Cut-off 24°

Clean lighting angle



— DL361 Series —
UGR<19

VISIBLE BRIGHTNESS, INVISIBLE LIGHT SOURCE

DL284 series





DL284A




DL284B



IP **65**
20 JOULES=IK **10**

DL284A/B




Downlight COB



DL284A COB series downlight with traditional deep faceted reflector which provides a perfect combination of high lighting efficiency, comfortable lighting and low glare design, without compromising on lighting performance (color rendering and color uniformity). IP65 waterproof with high protection level, which offers a wider application area. It is with tempered glass as IK06/IK08. Based on DL284A,DL284B added the extend frame which looks like a slim surface mounted downlight.

Materials of Housing : Die-casting Aluminium

Materials of Optics : PC+Aluminium+Tempered glass



DL284C

Downlight COB



DL284C COB series downlight with traditional deep faceted reflector which provides a perfect combination of high lighting efficiency, comfortable lighting and low glare design, without compromising on lighting performance (color rendering and color uniformity). IP65 waterproof and IK10 with high protection level are available.

Materials of Housing : Die-casting Aluminium

Materials of Optics : PC+Aluminium+Tempered glass



Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL284A-3-10W	10W	Ø110x51	Ø90-Ø95	1050lm	0.34	30PCS
DL284A-3-13W	13W	Ø110x51	Ø90-Ø95	1350lm	0.34	30PCS
DL284A/B-4-18W	18W	Ø150x64/ Ø145x82	Ø125-140/ Ø125-135	1950lm	0.62/0.72	12PCS
DL284A/B-4-25W	25W	Ø150x64/ Ø145x82	Ø125-140/ Ø125-135	2750lm	0.62/0.72	12PCS
DL284A/B-6-18W	18W	Ø172x69/ Ø172x92	Ø150-165/ Ø150-160	1950lm	0.79/0.90	12PCS
DL284A/B-6-25W	25W	Ø172x69/ Ø172x92	Ø150-165/ Ø150-160	2750lm	0.79/0.90	12PCS
DL284A/B-6-30W	30W	Ø172x69/ Ø172x92	Ø150-165/ Ø150-160	3500lm	0.79/0.90	12PCS
DL284A/B-8-18W	18W	Ø235x81/ Ø220x104	Ø200-220/ Ø200-210	1950lm	1.27/1.45	6PCS
DL284A/B-8-25W	25W	Ø235x81/ Ø220x104	Ø200-220/ Ø200-210	2750lm	1.27/1.45	6PCS
DL284A/B-8-35W	35W	Ø235x81/ Ø220x104	Ø200-220/ Ø200-210	3850lm	1.27/1.45	6PCS

CCT — 2700K — 3000K — 4000K

Trim — White — Black

Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL284C-3-10W	10W	Ø110x51	Ø90-Ø95	1050lm	0.34	30PCS
DL284C-3-13W	13W	Ø110x51	Ø90-Ø95	1350lm	0.34	30PCS
DL284C-4-18W	18W	Ø150x64	Ø125-140	1950lm	0.62	12PCS
DL284C-4-25W	25W	Ø150x64	Ø125-140	2750lm	0.62	12PCS
DL284C-6-18W	18W	Ø172x69	Ø150-165	1950lm	0.79	12PCS
DL284C-6-25W	25W	Ø172x69	Ø150-165	2750lm	0.79	12PCS
DL284C-6-30W	30W	Ø172x69	Ø150-165	3500lm	0.79	12PCS
DL284C-8-18W	18W	Ø235x81	Ø200-220	1950lm	1.27	6PCS
DL284C-8-25W	25W	Ø235x81	Ø200-220	2750lm	1.27	6PCS
DL284C-8-35W	35W	Ø235x81	Ø200-220	3850lm	1.27	6PCS

CCT — 2700K — 3000K — 4000K

Trim — White — Black



DL284A




DL284B



IP **65**
20 JOULES=IK **10**

DL284A/B


Downlight SMD



DL284A SMD series downlight with traditional deep faceted reflector which provides a perfect combination of high lighting efficiency, comfortable lighting and low glare design, without compromising on lighting performance (color rendering and color uniformity). IP65 waterproof with high protection level, which offers a wider application area. It is with tempered glass as IK06/IK08. Based on DL284A, DL284B added the extend frame which looks like a slim surface mounted downlight.

Materials of Housing : Die-casting Aluminium

Materials of Optics : PC+Aluminium+Tempered glass

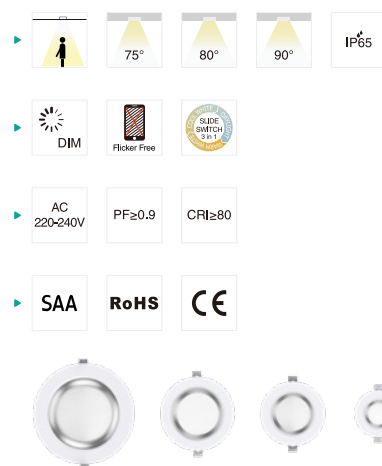


Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL284A-3-10W	10W	Ø110x51	Ø90-Ø95	950lm	0.34	30PCS
DL284A-3-13W	13W	Ø110x51	Ø90-Ø95	1300lm	0.34	30PCS
DL284A/B-4-18W	18W	Ø150x64/ Ø145x82	Ø125-140/ Ø125-135	1950lm	0.62/0.72	12PCS
DL284A/B-4-25W	25W	Ø150x64/ Ø145x82	Ø125-140/ Ø125-135	2750lm	0.62/0.72	12PCS
DL284A/B-6-18W	18W	Ø172x69/ Ø172x92	Ø150-165/ Ø150-160	1950lm	0.79/0.90	12PCS
DL284A/B-6-25W	25W	Ø172x69/ Ø172x92	Ø150-165/ Ø150-160	2750lm	0.79/0.90	12PCS
DL284A/B-6-30W	30W	Ø172x69/ Ø172x92	Ø150-165/ Ø150-160	3500lm	0.79/0.90	12PCS
DL284A/B-8-18W	18W	Ø235x81/ Ø220x104	Ø200-220/ Ø200-210	1950lm	1.27/1.45	6PCS
DL284A/B-8-25W	25W	Ø235x81/ Ø220x104	Ø200-220/ Ø200-210	2750lm	1.27/1.45	6PCS
DL284A/B-8-35W	35W	Ø235x81/ Ø220x104	Ø200-220/ Ø200-210	3850lm	1.27/1.45	6PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black

DL284C


Downlight SMD



DL284C SMD series downlight with traditional deep faceted reflector which provides a perfect combination of high lighting efficiency, comfortable lighting and low glare design, without compromising on lighting performance (color rendering and color uniformity). IP65 waterproof and IK10 with high protection level are available.

Materials of Housing : Die-casting Aluminium

Materials of Optics : PC+Aluminium+Tempered glass

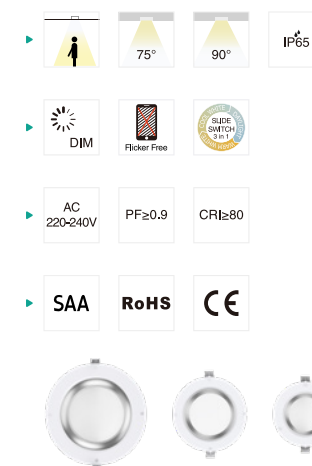

Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL284C-3-10W	10W	Ø110x51	Ø90-Ø95	1050lm	0.34	30PCS
DL284C-3-13W	13W	Ø110x51	Ø90-Ø95	1350lm	0.34	30PCS
DL284C-4-18W	18W	Ø150x64	Ø125-140	1950lm	0.62	12PCS
DL284C-4-25W	25W	Ø150x64	Ø125-140	2750lm	0.62	12PCS
DL284C-6-18W	18W	Ø172x69	Ø150-165	1950lm	0.79	12PCS
DL284C-6-25W	25W	Ø172x69	Ø150-165	2750lm	0.79	12PCS
DL284C-6-30W	30W	Ø172x69	Ø150-165	3500lm	0.79	12PCS
DL284C-8-18W	18W	Ø235x81	Ø200-220	1950lm	1.27	6PCS
DL284C-8-25W	25W	Ø235x81	Ø200-220	2750lm	1.27	6PCS
DL284C-8-35W	35W	Ø235x81	Ø200-220	3850lm	1.27	6PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black



TH0001A

TH0001B

TH0001C

TH0001D


TH0001 Downlight



TH0001 is a trim cover exchangeable modular downlight with six beam angles 15° / 20° / 24° / 36° / 45° / 50° as options. It adopts magnet splice and quick clips design, make assemble and installation more convenience. UGR<19, IP20/IP44 available, SDCM<4, it's a great luminaire which very suitable for high-end lighting applications.

Materials of Housing : Die-casting Aluminium

Materials of Optics : PMMA/PC

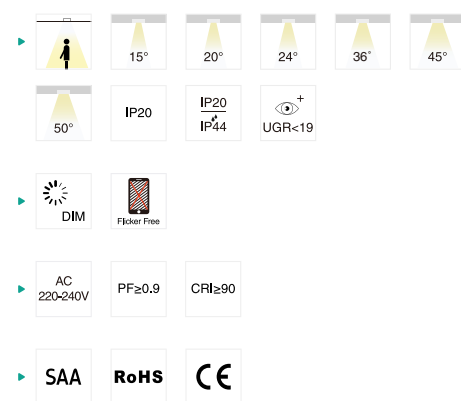

Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TH0001A-55-4.5W	4.5W	Ø62x67	Ø55-57	350lm	0.19	24PCS
TH0001A-55-4.5W	4.5W	62x62x73	Ø55-57	350lm	0.19	24PCS
TH0001A-55-4.5W	4.5W	Ø64x68	Ø75-77	350lm	0.19	24PCS
TH0001A-55-8W	8W	Ø62x67	Ø75-77	550lm	0.19	24PCS
TH0001A-55-8W	8W	62x62x73	Ø75-77	550lm	0.19	24PCS
TH0001A-55-8W	8W	Ø64x68	Ø75-77	550lm	0.19	24PCS
TH0001B-55-4.5W	4.5W	Ø62x67	Ø105-107	350lm	0.19	24PCS
TH0001B-55-4.5W	4.5W	62x62x73	Ø105-107	350lm	0.19	24PCS
TH0001B-55-4.5W	4.5W	Ø62x67	Ø105-107	350lm	0.19	24PCS
TH0001B-55-8W	8W	Ø62x67	Ø105-107	550lm	0.19	24PCS
TH0001B-55-8W	8W	62x62x73	Ø150-152	550lm	0.19	24PCS
TH0001B-55-8W	8W	Ø62x67	Ø150-152	550lm	0.19	24PCS

CCT — 2700K — 3000K — 4000K

Trim — White — Black — Silver


TH0001A/B-75-7.5W	7.5W	Ø82x85	Ø75-77	650lm	0.29	24PCS
TH0001A/B-75-7.5W	7.5W	Ø110x85	Ø75-77	650lm	0.29	24PCS
TH0001A/B-75-7.5W	7.5W	83x83x85	Ø75-77	650lm	0.29	24PCS
TH0001A/B-75-7.5W	7.5W	110x110x85	Ø75-77	650lm	0.29	24PCS
TH0001A/B-75-7.5W	7.5W	Ø82x85	Ø75-77	650lm	0.29	24PCS
TH0001A/B-75-7.5W	7.5W	Ø110x85	Ø75-77	650lm	0.29	24PCS
TH0001A/B-75-10W	10W	Ø82x85	Ø75-77	800lm	0.29	24PCS
TH0001A/B-75-10W	10W	Ø110x85	Ø75-77	800lm	0.29	24PCS
TH0001A/B-75-10W	10W	83x83x85	Ø75-77	800lm	0.29	24PCS
TH0001A/B-75-10W	10W	110x110x85	Ø75-77	800lm	0.29	24PCS
TH0001A/B-75-10W	10W	Ø82x85	Ø75-77	800lm	0.29	24PCS
TH0001A/B-75-10W	10W	Ø110x85	Ø75-77	800lm	0.29	24PCS
TH0001A/B-75-12W	12W	Ø82x85	Ø75-77	950lm	0.29	24PCS
TH0001A/B-75-12W	12W	Ø110x85	Ø75-77	950lm	0.29	24PCS
TH0001A/B-75-12W	12W	83x83x85	Ø75-77	950lm	0.29	24PCS
TH0001A/B-75-12W	12W	110x110x85	Ø75-77	950lm	0.29	24PCS
TH0001A/B-75-12W	12W	Ø82x85	Ø75-77	950lm	0.29	24PCS
TH0001A/B-75-12W	12W	Ø110x85	Ø75-77	950lm	0.29	24PCS
TH0001A/B-75-15W	15W	Ø82x85	Ø75-77	1100lm	0.29	24PCS
TH0001A/B-75-15W	15W	Ø110x85	Ø75-77	1100lm	0.29	24PCS
TH0001A/B-75-15W	15W	83x83x85	Ø75-77	1100lm	0.29	24PCS
TH0001A/B-75-15W	15W	110x110x85	Ø75-77	1100lm	0.29	24PCS
TH0001A/B-75-15W	15W	Ø82x85	Ø75-77	1100lm	0.29	24PCS
TH0001A/B-75-15W	15W	Ø110x85	Ø75-77	1100lm	0.29	24PCS
TH0001A/B-105-14W	14W	Ø114x120	105-107	1250lm	0.70	12PCS
TH0001A/B-105-20W	20W	Ø114x120	105-107	1750lm	0.70	12PCS
TH0001A/B-105-25W	25W	Ø114x120	105-107	2100lm	0.70	12PCS
TH0001A/B-105-30W	30W	Ø114x120	105-107	2400lm	0.70	12PCS
TH0001A/B-150-30W	30W	Ø154x174	150-152	3100lm	1.75	6PCS
TH0001A/B-150-35W	35W	Ø154x174	150-152	3500lm	1.75	6PCS
TH0001A/B-150-40W	40W	Ø154x174	150-152	3900lm	1.75	6PCS
TH0001A/B-150-45W	45W	Ø154x174	150-152	4300lm	1.75	6PCS
TH0001C-75-10W	10W	Ø82x94	Ø75-77	850lm	0.37	24PCS
TH0001C-75-10W	10W	Ø110x94	Ø75-77	850lm	0.37	24PCS
TH0001C-75-14W	14W	Ø82x94	Ø75-77	1200lm	0.37	24PCS
TH0001C-75-14W	14W	Ø110x94	Ø75-77	1200lm	0.37	24PCS
TH0001D-75-10W	10W	Ø82x94	Ø75-77	1000lm	0.37	24PCS
TH0001D-75-10W	10W	Ø110x94	Ø75-77	1000lm	0.37	24PCS
TH0001D-75-14W	14W	Ø82x94	Ø75-77	1450lm	0.37	24PCS
TH0001D-75-14W	14W	Ø110x94	Ø75-77	1450lm	0.37	24PCS

CCT — 2700K — 3000K — 4000K


Trim — White — Black — Silver




TH0001A/B

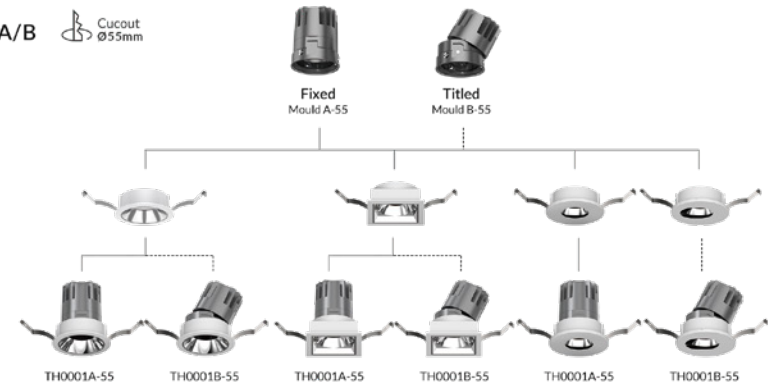



TH0001A/B

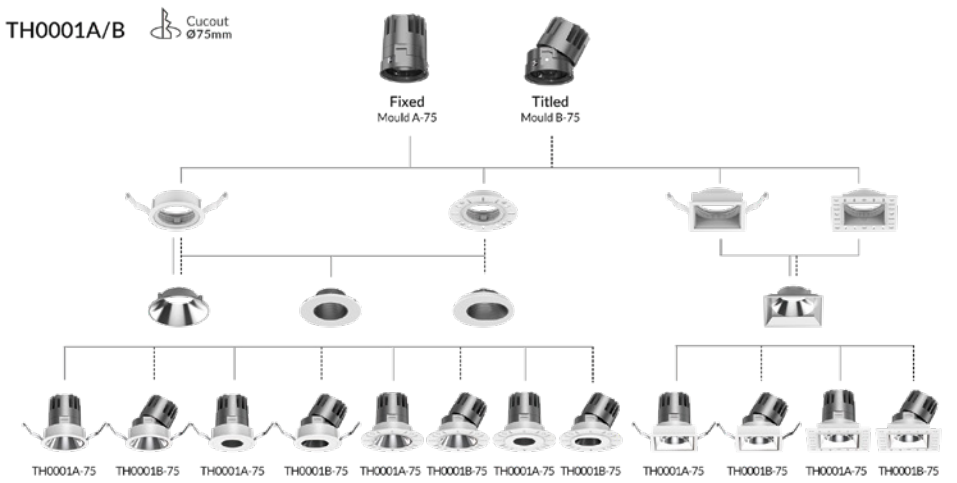

TH0001C/D

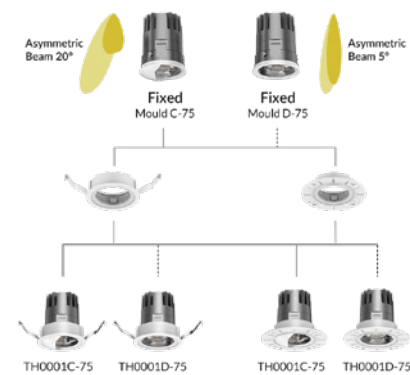

TH0001A/B

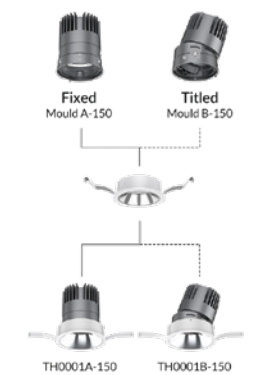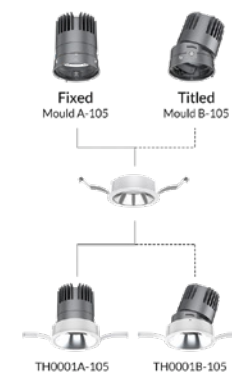




DL113 Downlight



DL113 unique downlight adopts brand CITIZEN COB, reflector and tempered glass. Deep reflector reduces glare rate effectively. External driver is exchangeable through quick connector among non-dimmable driver, Triac dimmable, 0-10V and DALI dimmable drivers.

Materials of Housing : Die-casting Aluminium

Materials of Optics : PC+Al1070+Tempered glass

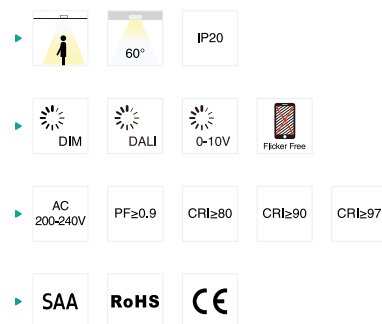

Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL113-4-13W	13W	Ø150x123	Ø135-140	1520lm	0.85	12PCS
DL113-4-20W	20W	Ø150x123	Ø135-140	2280lm	0.85	12PCS
DL113-4-25W	25W	Ø150x123	Ø135-140	2810lm	0.85	12PCS

CCT — 2700K — 3000K — 4000K — Trim — White — Black — Silver




DL122 Downlight



DL122 Gimbal downlight adopts brand CITIZEN COB, exchangeable reflector and tempered glass. Horizontally 355° and vertically 30° rotatable. External driver is exchangeable through quick connector among non-dimmable driver, Triac dimmable, 0-10V and DALI dimmable drivers.

Materials of Housing : Aluminium

Materials of Optics : PC

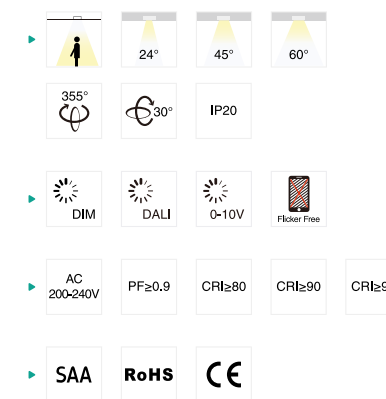


Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL122-4-18W	18W	Ø150x116	Ø130-140	1820lm	0.71	12PCS
DL122-4-25W	25W	Ø150x116	Ø130-140	2430lm	0.71	12PCS
DL122-6-25W	25W	Ø185x130	Ø160-170	2420lm	1.10	12PCS
DL122-6-35W	35W	Ø185x130	Ø160-170	3260lm	1.10	12PCS
DL122-6-42W	42W	Ø185x130	Ø160-170	3780lm	1.10	12PCS

CCT — 2700K — 3000K — 4000K — Trim — White — Black




CL156 Downlight



CL156 is IP20 LED downlight with COB LED. Various optical design 10°/15°/24°/36°/45°/60° and full dimensions 2.5inch, 3inch, 4inch, 6inch meet different demand.

Materials of Housing : Die-casting Aluminium
Materials of Optics : PC

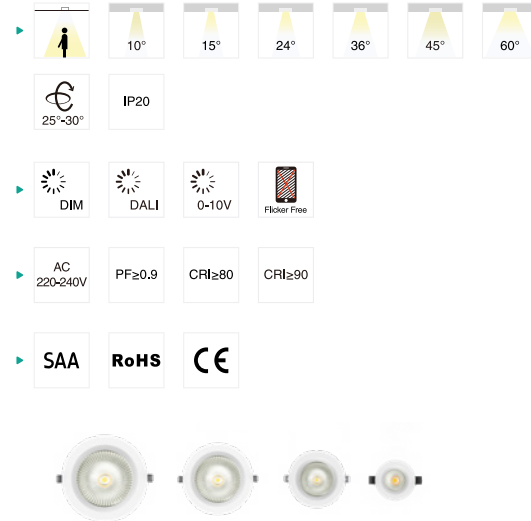

Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
CL156-2.5-8W	8W	Ø80x32	Ø68-75	850lm	0.24	30PCS
CL156-3-10W	10W	Ø110x47	Ø90-95	1100lm	0.38	30PCS
CL156-3-13W	13W	Ø110x47	Ø90-95	1400lm	0.38	30PCS
CL156-4-18W	18W	Ø140x65	Ø120-130	2200lm	0.56	12PCS
CL156-4-25W	25W	Ø140x65	Ø120-130	2800lm	0.56	12PCS
CL156-6-18W	18W	Ø180x81	Ø160-170	2250lm	0.88	12PCS
CL156-6-25W	25W	Ø180x81	Ø160-170	2800lm	0.88	12PCS
CL156-6-35W	35W	Ø180x81	Ø160-170	3700lm	0.88	12PCS

CCT ——— 3000K ——— 4000K ——— 5700K


Trim ——— White ——— Black



Tilted
25-30° flexible rotary




DL297A Downlight



DL297A LED downlight adopts high lumen COB light source, the special optic lens and reflector design offer a uniform light output and low glare effect. It is an extension design, 360 degree horizontal rotation and 68 degree vertically rotation. And it has round shape, square shape with single/ double/triple heads which is suitable for various application area.

Materials of Housing : Aluminium


Materials of Optics : PC



Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL297A-2.5-10W	10W	Ø100x114	Ø83-90	900lm	0.50	24PCS
DL297A-1010-10W	10W	100x100x114	83-90x83-90	900lm	0.50	24PCS
DL297A-2.5-15W	15W	Ø100x114	Ø83-90	1350lm	0.50	24PCS
DL297A-1010-15W	15W	100x100x114	83-90x83-90	1350lm	0.50	24PCS
DL297A-1018-20W	20W	180x100x114	85-90x165-170	1800lm	0.90	12PCS
DL297A-1018-30W	30W	180x100x114	85-90x165-170	2700lm	0.90	12PCS
DL297A-1026-30W	30W	260x100x114	85-90x245-250	2700lm	1.50	6PCS
DL297A-1026-45W	45W	260x100x114	85-90x245-250	4050lm	1.50	6PCS
DL297A-1026-42W-D	42W	260x100x114	85-90x245-250	3600lm	1.50	6PCS

CCT ——— 2700K ——— 3000K ——— 4000K

Trim ——— White ——— Black

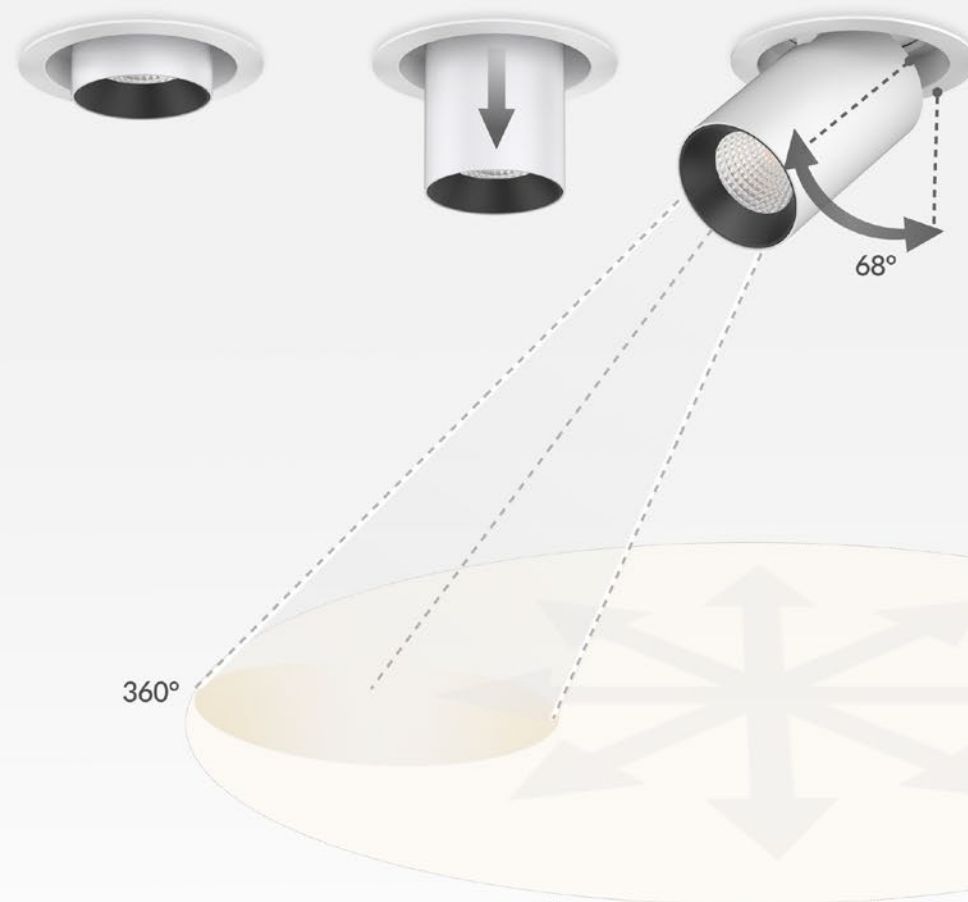


DL297 SERIES

DL297A Series Extension Design
Adjustable Downlight




DL77 Downlight



DL77 Gimbal downlight adopts brand CITIZEN COB, reflector and tempered glass. External driver is exchangeable through quick connector among non-dimmable driver, Triac dimmable, 0-10V and DALI dimmable drivers.

Materials of Housing : Die-casting Aluminium

Materials of Optics : PC

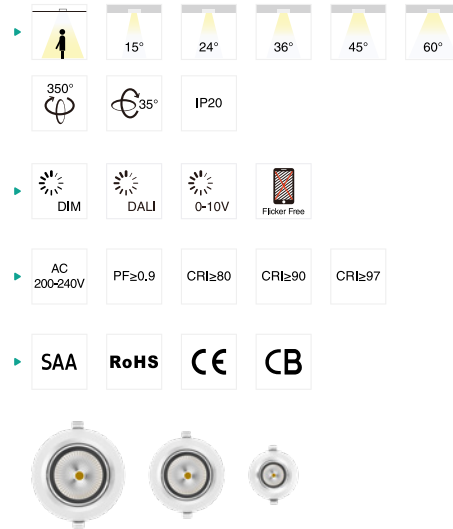

Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL77-2.5-10W	10W	Ø96x68	Ø85-90	800lm	0.25	36PCS
DL77-4-15W	15W	Ø145x102	Ø120-130	1800lm	0.57	18PCS
DL77-4-20W	20W	Ø145x102	Ø120-130	2100lm	0.57	18PCS
DL77-6-35W	35W	Ø180x128.5	Ø165-170	3800lm	1.07	12PCS
DL77-6-45W	45W	Ø180x128.5	Ø165-170	5080lm	1.07	12PCS

CCT — 2700K — 3000K — 4000K

Trim — White — Black — Silver




DL335 Downlight



DL335 is scoop design COB downlight and can be rotated in horizontal direction with 350° and vertical direction 90°. External driver, non-dimmable, Triac dimmable, 0-10V and DALI dimmable are available.

Materials of Housing : Die-casting Aluminium


Materials of Optics : PC/Aluminium

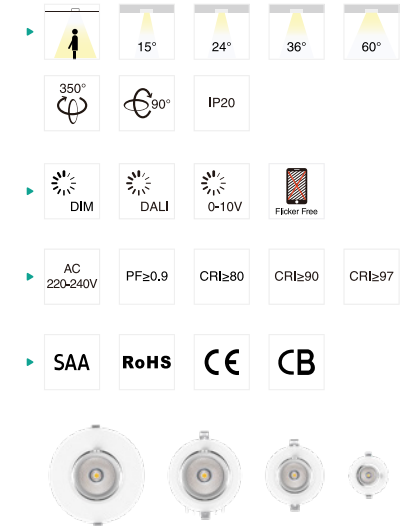


Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL335-2.5-10W	10W	Ø96x74	Ø85-90	1000lm	0.20	36PCS
DL335-4-18W	18W	Ø145x111	Ø125-130	1900lm	0.60	18PCS
DL335-4-25W	25W	Ø145x111	Ø125-130	2600lm	0.60	18PCS
DL335-6-25W	25W	Ø180x147	Ø165-170	2700lm	1.05	12PCS
DL335-6-35W	35W	Ø180x147	Ø165-170	3600lm	1.05	12PCS
DL335-6-45W	45W	Ø180x147	Ø165-170	4500lm	1.05	12PCS
DL335-8-25W	25W	Ø235x144	Ø200-210	2700lm	1.15	12PCS
DL335-8-35W	35W	Ø235x144	Ø200-210	3600lm	1.15	12PCS
DL335-8-45W	45W	Ø235x144	Ø200-210	4500lm	1.15	12PCS

CCT — 2700K — 3000K — 4000K

Trim — White — Black

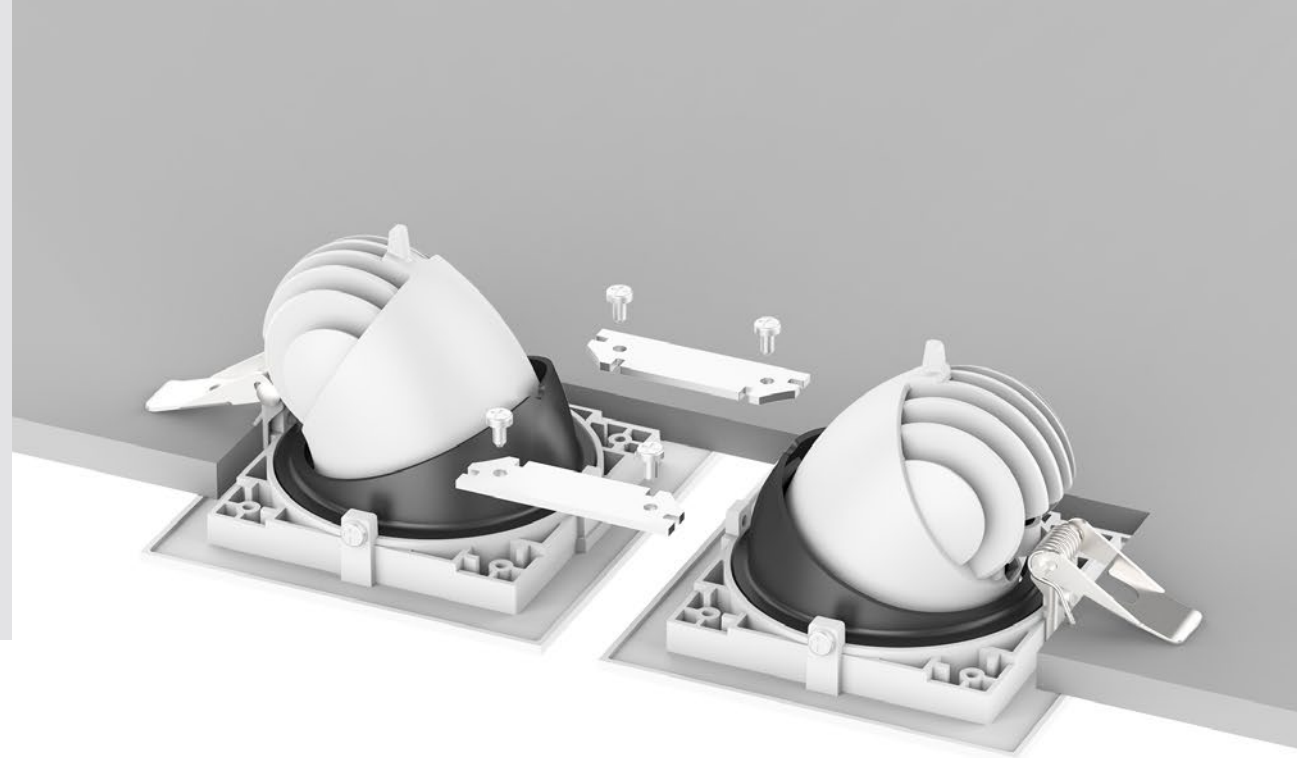


CL108 Downlight



CL108 Gimbal downlight adopts brand CITIZEN COB, Square modular design allows various DIY combinations through splicing plates. External driver is exchangeable through quick connector among non-dimmable driver, Triac dimmable, 0-10V and DALI dimmable drivers.

Materials of Housing : Die-casting Aluminium
Materials of Optics : PC

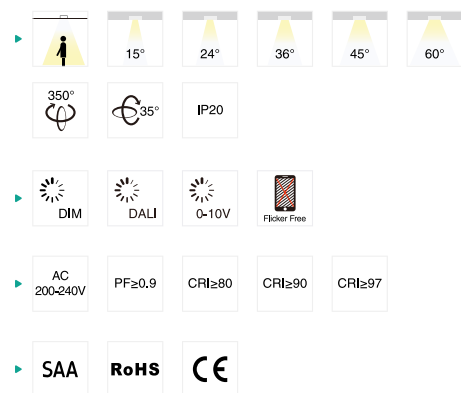


Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
CL108-2.5-10W	10W	100x100x70	85-85	780lm	0.29	36PCS
CL108-4-15W	15W	145x145x107	125-125	1290lm	0.60	18PCS
CL108-4-20W	20W	145x145x107	125-125	2100lm	0.60	18PCS
CL108-6-35W	35W	180x180x129	165-165	3800lm	1.07	12PCS
CL108-6-45W	45W	180x180x129	165-165	4350lm	1.07	12PCS

CCT ——— 2700K ——— 3000K ——— 4000K


Trim ——— White ——— Black

DIY Splicing Scoop downlight

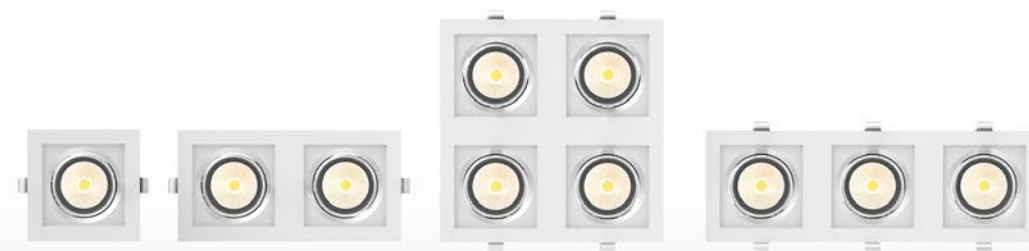




CL113A Downlight



CL113A Gimbal downlight adopts brand CITIZEN COB. Square modular design allows various DIY combinations through splicing plates. External driver is exchangeable through quick connector among non-dimmable driver, Triac dimmable, 0-10V and DALI dimmable drivers.

Materials of Housing : Aluminium

Materials of Optics : PC



Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
CL113A-6-25W	25W	175x175x110	150-160	2750lm	0.83	18PCS
CL113A-6-35W	35W	175x175x110	150-160	3850lm	0.83	18PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black




CL113B Downlight



CL113B Gimbal downlight adopts brand CITIZEN COB. External driver is exchangeable through quick connector among non-dimmable driver, Triac dimmable, 0-10V and DALI dimmable drivers.

Materials of Housing : Aluminium

Materials of Optics : PC




Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
CL113B-6-25W	25W	Ø180x110	Ø150-160	2750lm	0.79	18PCS
CL113B-6-35W	35W	Ø180x110	Ø150-160	3850lm	0.79	18PCS

CCT — 2700K — 3000K — 4000K

Trim — White — Black




RD01 Downlight



RD01 rectangular downlight is unique designed with COB high power LED chip. IP65 waterproof can be used in wider applications, especial for damp location. Isolated external driver solution achieves stable working performance.

Materials of Housing : Die-casting Aluminium

Materials of Optics : Tempered glass




Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
RD01-35W	35W	235x145x117.4	220x130	3950lm	2.40	6PCS
RD01-45W	45W	235x145x117.4	220x130	4700lm	2.40	6PCS

CCT — 3000K — 4000K — 5700K

Finish — White — Black




RD01-C Downlight



RD01-C SMD Rectangular downlight achieves high lumen output, 90° wide beam angle. External driver solution achieves stable working performance and easy maintenance. Tilt head provides various lighting direction for different applications. It is widely used for different commercial lighting situation.

Materials of Housing : Die-casting Aluminium

Materials of Optics : Tempered glass

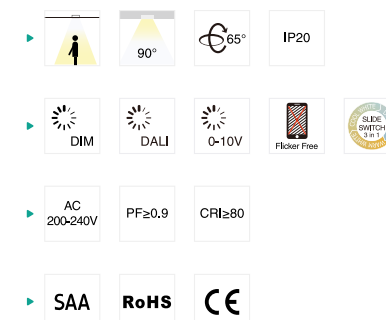


Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
RD01-C-40W	40W	246x156x115	225x130	3950lm	2.30	4PCS
RD01-C-40W-C3	40W	246x156x115	225x130	4400lm	2.30	4PCS
RD01-C-60W	60W	246x156x115	225x130	5450lm	2.30	4PCS
RD01-C-60W-C3	60W	246x156x115	225x130	6900lm	2.30	4PCS

CCT — 3000K — 4000K — 5700K

Finish — White — Black




RD07A&B Downlight



RD07 LED is new commercial light series with external driver design. Type A is unique louver reflector design and type B woven glass design, both 2 types adopting high lumen SMD LED chip with uniform light output. IP65 waterproof and 70°vertically rotatable are available

Materials of Housing : PC/Aluminium
Materials of Optics : PC/Aluminium

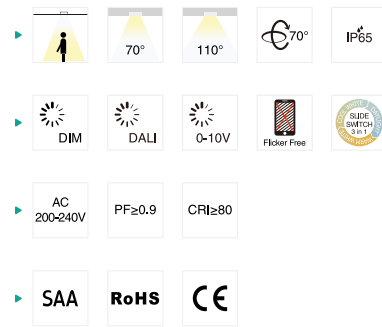


Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
RD07A-32W	32W	235x145x117.4	220x130	3150lm	1.77	6PCS
RD07A-42W	42W	235x145x117.4	220x130	3900lm	1.77	6PCS
RD07B-32W	32W	235x145x117.4	220x130	4200lm	1.77	6PCS
RD07B-42W	42W	235x145x117.4	220x130	5100lm	1.77	6PCS

CCT — 3000K — 4000K — 5700K

Finish — White — Black




CL146 Downlight



CL146 is gyro design commercial LED downlight with single/double/triple head options. It is tiltable 45° in all directions 355°. SMD with 1CCT/ 3CCT, COB LED light source is available.

Materials of Housing : Die-casting Aluminium
Materials of Optics : PC

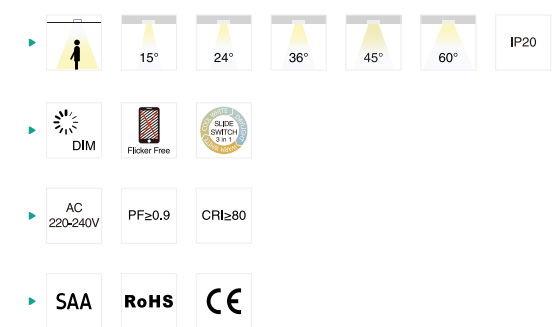


Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
CL146A-15W(COB)	15W	125x125x88	115x115	1590lm	0.63	12PCS
CL146A-30W(COB)	30W	228x125x88	218x115	3240lm	0.95	12PCS
CL146A-45W(COB)	45W	331x125x88	321x115	4830lm	1.32	6PCS
CL146B-8W(SMD)	8W	125x125x88	115x115	770lm	0.63	12PCS
CL146B-16W(SMD)	16W	228x125x88	218x115	1480lm	0.95	12PCS
CL146B-24W(SMD)	24W	331x125x88	321x115	2400lm	1.32	6PCS

CCT — 2700K — 3000K — 4000K

Trim — White — Black




CL99 Downlight



CL99 downlight is a unique replaceable module design which makes an easier installation and maintenance. The drivers are sperate and external for easy replacement. It is an ideal design for commercial lighting.

Materials of Housing : Die-casting Aluminium

Materials of Optics : PC

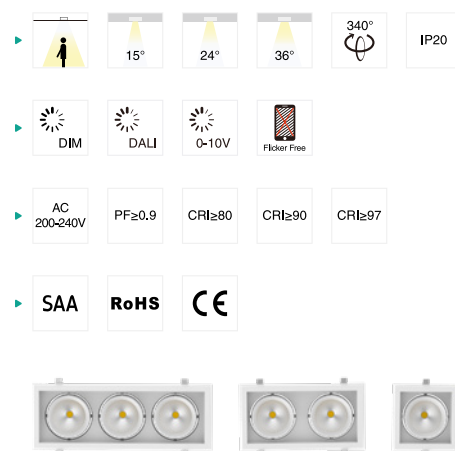


Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
CL99-30W	30W	175x175x110	160-160	3500lm	1.25	12PCS
CL99-60W	60W	330x175x110	310-160	6700lm	2.25	6PCS
CL99-90W	90W	475x175x110	455-160	9870lm	3.20	6PCS

CCT — 2700K — 3000K — 4000K

Finish — White — Black

Focusing lighting

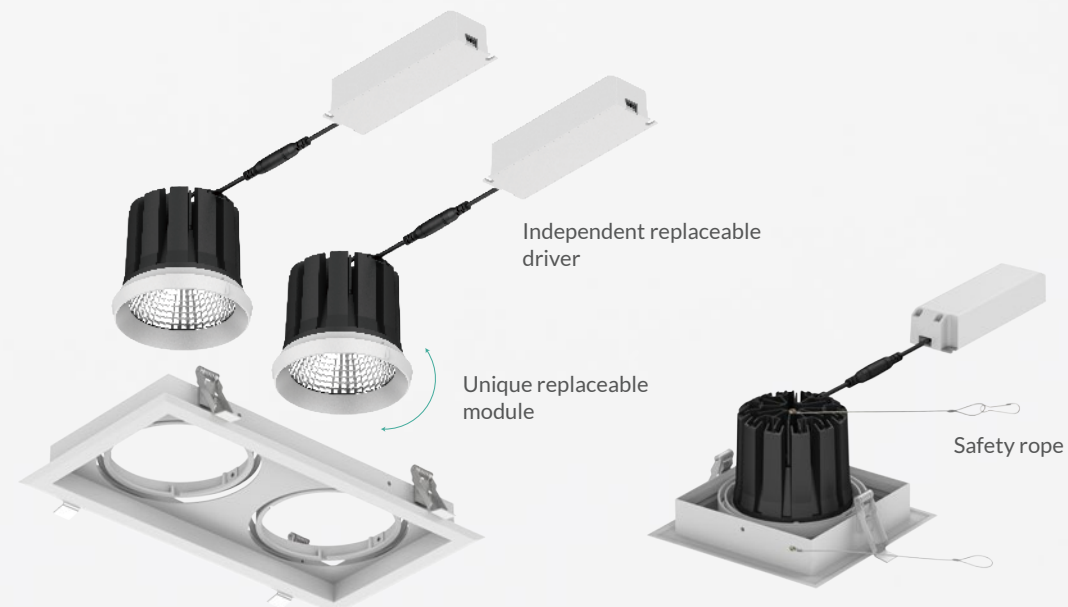




RD02&RD03 Downlight



This frameless commercial downlight adopted brand CREE COB chip which offers a high lumen output. RD02 RD03 single head, double heads, triple heads provide a wider choice. Adjustable lighting direction offers various lighting orientation.

Materials of Housing : Die-casting Aluminium
Materials of Optics : PC




Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
RD02-8W	8W	155.5x83.5x134	86-86	550lm	1.30	12PCS
RD02-16W	16W	235.5x83.5x134	167-86	1250lm	1.90	6PCS
RD02-24W	24W	315.5x83.5x134	247-86	1700lm	2.50	6PCS
RD03-12W	12W	185x113x154	116-116	980lm	1.70	12PCS
RD03-24W	24W	294x113x154	228-116	2040lm	2.50	6PCS
RD03-36W	36W	404x113x154	338-116	2700lm	3.10	6PCS

CCT — 2700K — 3000K — 4000K

Finish — White — Black



RD04&RD05 Downlight



RD04 RD05 with brand CREE COB high power LED chip. Single head, double heads and triple heads provide a wider choice. Adjustable lighting direction offers various lighting orientation.

Materials of Housing : Die-casting Aluminium
Materials of Optics : PC



Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
RD04-8W	8W	100x100x135	85-85	550lm	1.10	12PCS
RD04-16W	16W	180x100x135	165-85	1250lm	1.80	6PCS
RD04-24W	24W	260x100x135	245-85	1700lm	2.40	6PCS
RD05-12W	12W	130x130x155	115-115	980lm	1.60	12PCS
RD05-24W	24W	239x130x155	224-115	2040lm	2.40	6PCS
RD05-36W	36W	349x130x155	334-115	2700lm	3.00	6PCS

CCT — 2700K — 3000K — 4000K

Finish — White — Black




DL266B



DL266C


DL266B/C Downlight

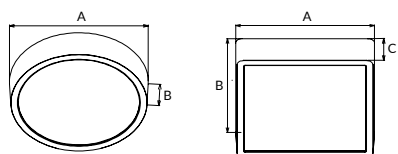

DL266B surface mounted downlight adopts 2835 SMD. The external driver design and 3 CCT interchangeable are available.

Materials of Housing : PC

Materials of Optics : PC



Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL266B-120-6W	6W	Ø120x45	700lm	0.187	24PCS
DL266B-160-8W	8W	Ø160x45	900lm	0.247	24PCS
DL266B-220-18W	18W	Ø220x47	2250lm	0.411	12PCS
DL266B-300-24W	24W	Ø300x47	3300lm	0.637	6PCS
DL266C-120-6W	6W	120x120x45	700lm	0.212	24PCS
DL266C-160-8W	8W	160x160x45	900lm	0.285	24PCS
DL266C-220-18W	18W	220x220x47	2250lm	0.477	12PCS
DL266C-300-24W	24W	300x300x47	3200lm	0.748	6PCS

CCT — 3000K — 4000K — 5700K


Finish — White — Black



DL266B/C
UP TO 140LM/W




DL38B Downlight



DL38B surface mounted downlight is a high-performance LED luminaire that can simultaneously or individually offer uniform and excellent light. It offers a wide choice of beam angles 24°/36°/45°/60° for optional. DALI and 3-CCT changeable are available.

Materials of Housing : Die-casting Aluminium

Materials of Optics : PC

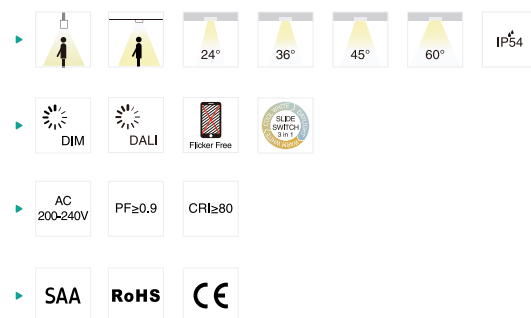

Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL38B-10W	10W	Ø90x100	1150lm	0.45	24PCS
DL38B-15W	15W	Ø90x100	1600lm	0.50	24PCS
DL38B-10W	10W	Ø120x110	1200lm	0.52	18PCS
DL38B-15W	15W	Ø120x110	1700lm	0.52	18PCS
DL38B-20W	20W	Ø120x110	2450lm	0.52	18PCS
DL38B-25W	25W	Ø120x110	2700lm	0.52	18PCS
DL38B-25W	25W	Ø160x120	2950lm	1.23	18PCS
DL38B-32W	32W	Ø160x120	3580lm	1.23	18PCS

CCT ——— 2700K ——— 3000K ——— 4000K

Finish ——— White ——— Black

Installation accessories ———

Suspension kit ACC-DL38B-90/120/160



DL38 Series




Interchangeable CCT






DL328 Downlight



DL328 Surface mounted downlight shape comes from a cone. It adopts COB light source and reflector polarized design to reach a uniform wall washing effect and lower the glare. No need to adjust angle to reach wall washing effect, integrated polarized design keeps both professional level and high cost performance.

Materials of Housing : Die-casting Aluminium+PC
Materials of Optics : PC + Tempered glass




Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL328-3-10W	10W	Ø90x113	1000lm	0.26	24PCS
DL328-4-18W	18W	Ø120x142	1950lm	0.39	12PCS
DL328-4-25W	25W	Ø120x142	2700lm	0.39	12PCS

CCT — 2700K — 3000K — 4000K

Finish — White — Black




DL176 Downlight



DL176 downlight with deep-set reflector provides better glaring control(UGR<19). It offers a wide choice of outputs, beam angles and color rendering options. Surface mounted down light with no-screw outside fixation provide a much cleaner out-looking design. Built-in driver, easy for installation.

Materials of Housing : Die-casting Aluminium
Materials of Optics : PC

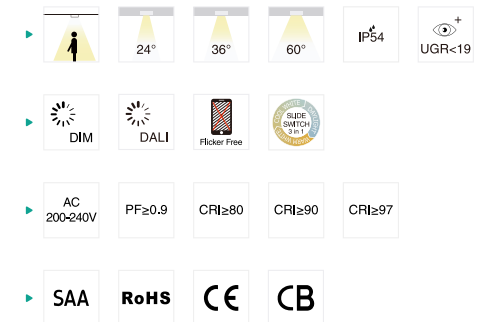


Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL176-15W	15W	Ø100x134	1750lm	0.65	18PCS
DL176-25W	25W	Ø120x144	2800lm	0.84	12PCS
DL176-35W	35W	Ø170x159	3900lm	1.45	6PCS

CCT — 2700K — 3000K — 4000K

Finish — White — Black — Wood grain




DL269 Downlight



DL269 series downlight as IP65 waterproof design is widely used for indoor and semi-outdoor environment. DL269A as COB and DL269B as SMD with flicker free driver, 3 CCT switchable. DL269A UGR<19, DL269B UGR<25. Tempered Glass in front as IK06.

Materials of Housing : Die-casting Aluminium

Materials of Optics : PC+Tempered Glass

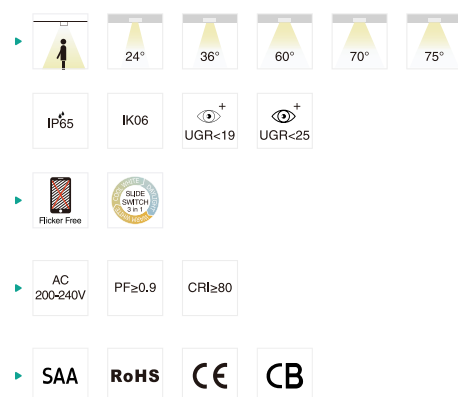

Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL269A/B-3-10W	10W	Ø90x107	1100lm	0.60	18PCS
DL269A/B-3-15W	15W	Ø90x107	1600lm	0.60	18PCS
DL269A/B-5-18W	18W	Ø130x115	1900lm	0.92	12PCS
DL269A/B-5-25W	25W	Ø130x115	2500lm	0.92	12PCS
DL269A/B-6-25W	25W	Ø160x110	2500lm	1.18	6PCS
DL269A/B-6-30W	30W	Ø160x110	3000lm	1.18	6PCS
DL269A/B-8-25W	25W	Ø214x119	2500lm	2.20	6PCS
DL269A/B-8-35W	35W	Ø214x119	3500lm	2.20	6PCS
DL269A/B-10-35W	35W	Ø250x125	3500lm	2.80	4PCS
DL269A/B-10-40W	40W	Ø250x125	4200lm	2.80	4PCS
DL269A/B-10-45W	45W	Ø250x125	4600lm	2.80	4PCS

CCT — 2700K — 3000K — 4000K


Finish — White — Black

IP65 IK06 Downlight





DL115A/B Downlight





DL115A/B SMD compact and neat surface mounted downlight series with 3 CCT in 1 lamp optional, slide switch for color selection are good for commercial project requirement. An IP54-rated version for indoor use. 60° beam angle with specular reflector can reach UGR<19.

Reflector



Materials of Housing : PC
Materials of Optics : PC+Aluminium




Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL115-4-13W	13W	Ø143x112	1460lm	0.39	12PCS
DL115-6-18W	18W	Ø170x124	1890lm	0.49	12PCS
DL115-8-25W	25W	Ø213x129	2930lm	0.80	12PCS

CCT — 3000K — 4000K — 5700K

Finish — White — Black




PD05A/B Pendant light




PD05A/B SMD pendant downlight series with 3 CCT in 1 lamp optional, slide switch for color selection is good for commercial project requirement. 60° beam angle with specular reflector can reach UGR<19.

Reflector



Materials of Housing : PC
Materials of Optics : PC+Aluminium




Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PD05-4-13W	13W	Ø143x110	1460lm	0.65	12PCS
PD05-6-18W	18W	Ø170x123	1890lm	0.83	12PCS
PD05-8-25W	25W	Ø213x127	2930lm	1.06	12PCS

CCT — 3000K — 4000K — 5700K

Finish — White — Black




DL207 Downlight



DL207 surface mounted LED downlight, with the special design of adjusting lighting arientation, 330° rotate and 90° tilt. The luminaire adopts CITIZEN brand COB, makes uniform light and excellent lumen output.

Materials of Housing : PC/Die-casting Aluminium

Materials of Optics : PMMA

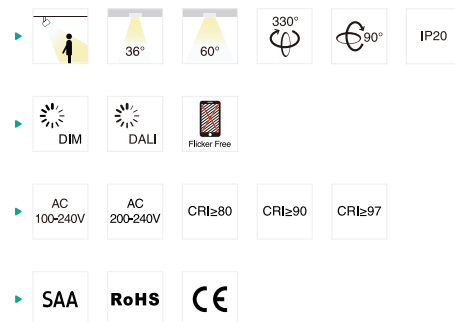

Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL207-15W	15W	Ø85x186	1750lm	0.67	12PCS
DL207-25W	25W	Ø85x211	2900lm	0.73	12PCS

CCT ——— 2700K 3000K 4000K

Finish ——— White Black






LED Ceiling Light & LED Bulkhead /Series/

LED ceiling light in all its forms—most of the time plays a secondary role of attention but attach great importance to the general lighting of a room. It puts your room in best lighting effect by innovative lighting solutions and design. IINNO ceiling light series has a low profile design providing a discreet, robust and stylish emergency, sensor and main luminaires.

It's with Elegantly slim and offered as both emergency and mains luminaires. It allows same seamless profile to be used throughout an installation. All options in the range are ideal for all projects when a high quality luminaire is required. Offering wide flexibility in facility lighting which is best suited to residential and commercial areas.




AL37 Ceiling light



AL37 Anti-glare LED ceiling light adopts multi-louver reflectors, effectively reduces glare index(UGR) to protecting human eyes. High luminous efficiency and fast connection terminal design make it to be widely used in various lighting applications. Microwave Sensor and Triac dimmable function are available.

Materials of Housing : PC


Materials of Optics : PC




Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
AL37-10-12W	12W	Ø250x33	1520lm	0.54	20PCS
AL37-12-15W	15W	Ø300x33	2000lm	0.80	10PCS
AL37-16-25W	25W	Ø400x33	3120lm	1.33	10PCS

CCT — 3000K — 4000K — 5700K

Finish — White

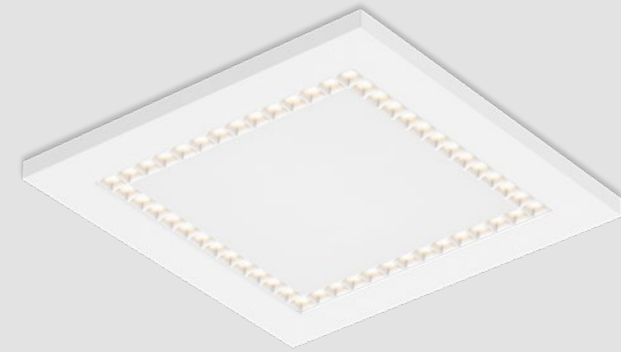


AL38 Ceiling light



AL38 Anti-glare square ceiling light adopts multi louver reflectors, effectively reduces glare index(UGR) to protecting human eyes. High luminous efficiency and fast connection terminal design make it to be widely used in various lighting applications. Microwave Sensor and Triac dimmable function are available.

Materials of Housing : PC


Materials of Optics : PC




Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
AL38-10-12W	12W	250x250x33	1560lm	0.66	20PCS
AL38-12-15W	15W	300x300x33	1890lm	0.90	10PCS
AL38-16-25W	25W	400x400x33	3050lm	1.58	10PCS

CCT — 3000K — 4000K — 5700K


Finish — White

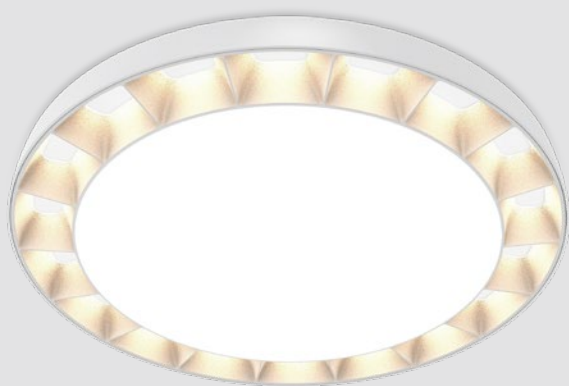

IP54 GRILL
REFLECTOR
REPLACEABLE

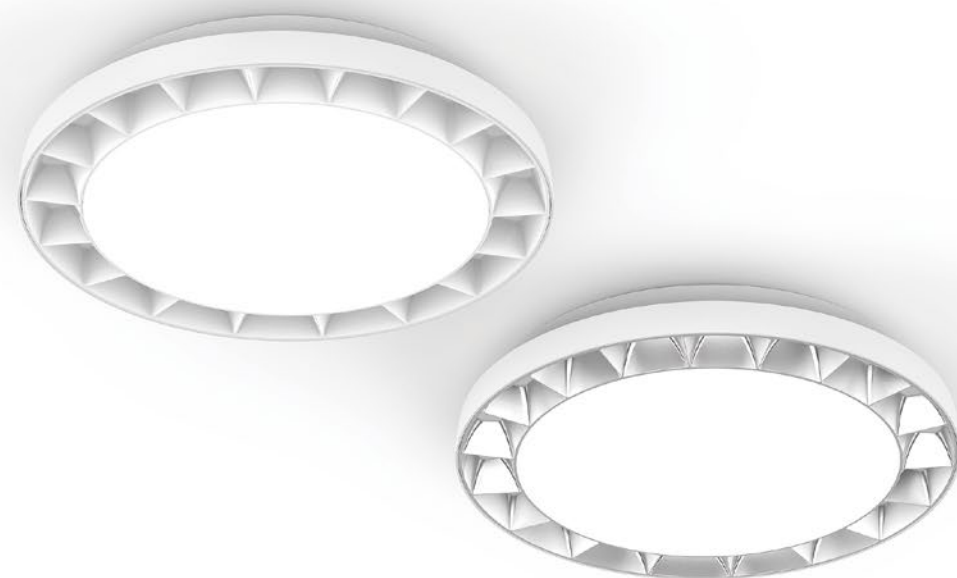


AL131 Ceiling light




AL131 is a grille-reflector ceiling light with low glare, offering comfortable visual experience. It's the perfect combination of technology and art, suitable for modern lighting.

Materials of Housing : PC

Materials of Optics : PC




Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
AL131-11-11W	11W	Ø275x48	1350lm	0.81	12PCS
AL131-11-17W	17W	Ø275x48	1900lm	0.81	12PCS
AL131-14-17W	17W	Ø350x48	1900lm	1.23	10PCS
AL131-14-24W	24W	Ø350x48	2600lm	1.23	10PCS

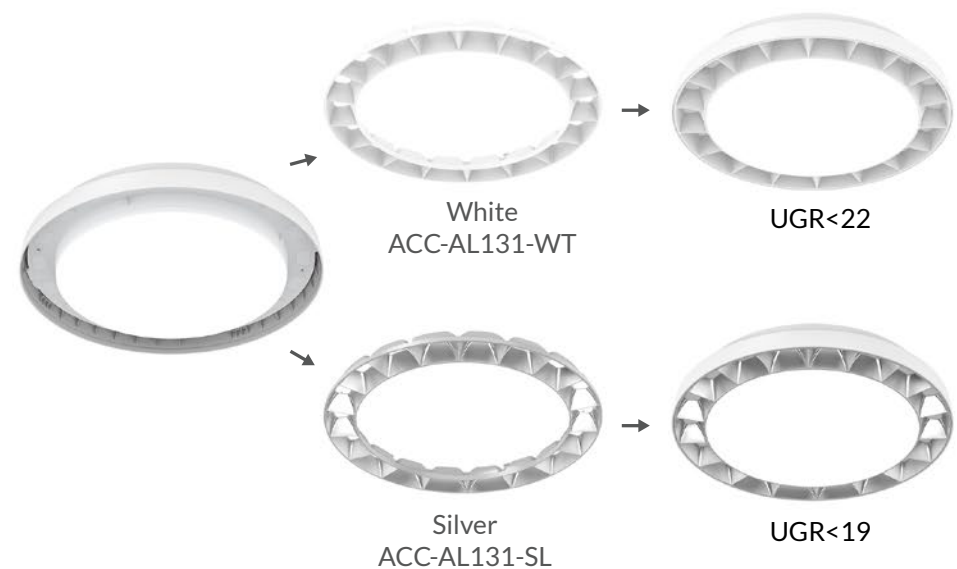


CCT ——— 3000K ——— 4000K

Finish ——— White ——— Silver

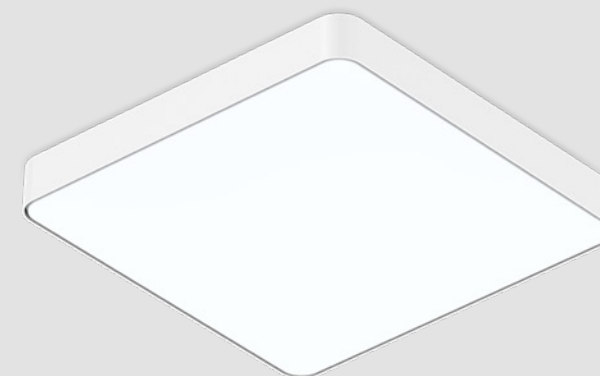

AL188 Ceiling light



AL188 LED ceiling light is tool free modular design, the modules can be replaceable tool free. It includes 10inch,12inch and 16inch, adopting high lumen SMD led, PIR sensor,microwave sensor, emergency, CCT interchangeable and wattage adjustable are available, IP54 and IK06 (not include PIR sensor version) protection level. Dimming way: triac dim and dali dim.

Materials of Housing : PC

Materials of Optics : PC




Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
AL188-10-10W	10W	Ø250x53	1000lm	1.20	12PCS
AL188-10-15W	15W	Ø250x53	1500lm	1.20	12PCS
AL188-12-12W	12W	Ø300x53	1230lm	1.80	6PCS
AL188-12-18W	18W	Ø300x53	1980lm	1.80	6PCS
AL188-12-25W	25W	Ø300x53	2750lm	1.80	6PCS
AL188-16-18W	18W	Ø400x53	1980lm	2.20	6PCS
AL188-16-25W	25W	Ø400x53	2750lm	2.20	6PCS
AL188-16-30W	30W	Ø400x53	3300lm	2.20	6PCS

CCT — 3000K — 4000K — 5700K

Finish — White


AL189 Ceiling light



AL189 is a square led ceiling light with modular design, adopting high lumen SMD LED, IP54 and IK08 protection level, multi-functional with adjustable microwave sensor, PIR sensor, emergency, CCT interchangeable and wattage selection. Dimming way: triac dim and DALI dim.

Materials of Housing : PC

Materials of Optics : PC

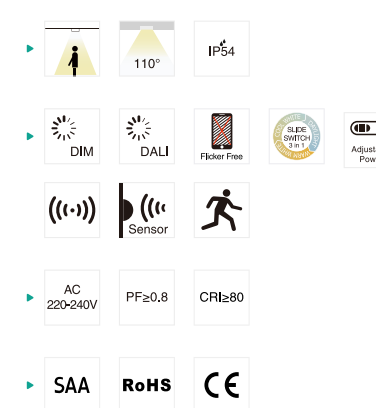


Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
AL189-10-10W	10W	250x250x54	1200lm	0.98	12PCS
AL189-10-15W	15W	250x250x54	1800lm	0.98	12PCS
AL189-12-15W	15W	300x300x54	1800lm	1.33	12PCS
AL189-12-18W	18W	300x300x54	2160lm	1.33	12PCS
AL189-12-25W	25W	300x300x54	3000lm	1.33	12PCS
AL189-16-18W	18W	400x400x54	2160lm	2.03	6PCS
AL189-16-25W	25W	400x400x54	3000lm	2.03	6PCS
AL189-16-30W	30W	400x400x54	3600lm	2.03	6PCS

CCT — 3000K — 4000K — 5700K

Finish — White



AL165 Ceiling light



AL165 LED ceiling light adopts high lumen SMD LED with 120lm/W light efficiency. It is IP44 and IK06 protection level. Multiple functions for options: triac dim, CCT interchangeable, sensor and emergency.

Materials of Housing : PC

Materials of Optics : PC




Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
AL165-10-12W	12W	Ø250x50	1500lm	0.65	12PCS
AL165-12-12W	12W	Ø300x50	1500lm	1.00	6PCS
AL165-12-18W	18W	Ø300x50	2200lm	1.00	6PCS
AL165-16-25W	25W	Ø420x50	3100lm	1.65	6PCS
AL165-16-30W	30W	Ø420x50	3600lm	1.65	6PCS


CCT — 3000K — 4000K — 5700K

Finish — — — — — White



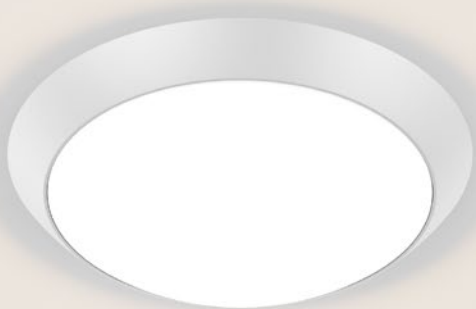


AL137 Ceiling light



AL137 LED ceiling light with oyster design, 120° beam angle and IP44 waterproof are available. Multiple functions: dim, 3CCT changeable, sensor and emergency. Available for both rear and side cable entry.

Materials of Housing : PC

Materials of Optics : PC




Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
AL137-10-12W	12W	Ø250x86	1400lm	0.50	12PCS
AL137-12-15W	15W	Ø300x90	1800lm	0.85	10PCS
AL137-16-18W	18W	Ø420x110	2200lm	1.50	6PCS
AL137-16-25W	25W	Ø420x110	3000lm	1.50	6PCS

CCT — 3000K — 4000K — 5700K

Finish — White




AL137B Ceiling light



AL137B LED wall lamp is with arc surface design with 30° downward polarized light, adopting high lumen SMD LED. Multiple functions with triac dim, CCT interchangeable, sensor and emergency. Available for both rear and side cable entry.

Materials of Housing : PC


Materials of Optics : PC

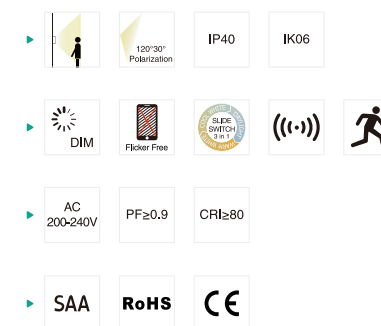


Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
AL137B-12-18W	18W	Ø300x90	2000lm	0.85	6PCS

CCT — 3000K — 4000K — 5700K

Finish — White

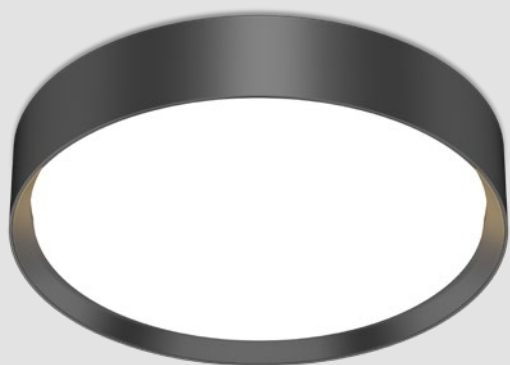


AL166 Ceiling light



AL166 LED ceiling light is stylish and modern design, with golden/ white/ black decorative rings. It can do multiple installation with surface/recessed/ suspension with accessories easily.

Materials of Housing : Die-casting Aluminium+PC
Materials of Optics : PC

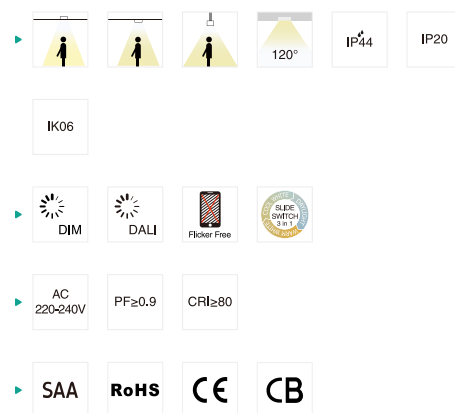

Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
AL166-12-18W	18W	Ø301x58	Ø320x85	1800lm	1.30	6PCS
AL166-12-24W	24W	Ø301x58	Ø320x85	2500lm	1.30	6PCS
AL166-16-24W	24W	Ø422x58	Ø440x85	2750lm	2.20	6PCS
AL166-16-30W	30W	Ø422x58	Ø440x85	3400lm	2.20	6PCS

CCT ——— 3000K 4000K 5700K Finish ——— White Black


Installation accessories ——— ACC-AL166-WT-BK-0200 ACC-AL166-12/16-WT-0300




AL166

Elegant design
with uniform lighting

Multiple installations

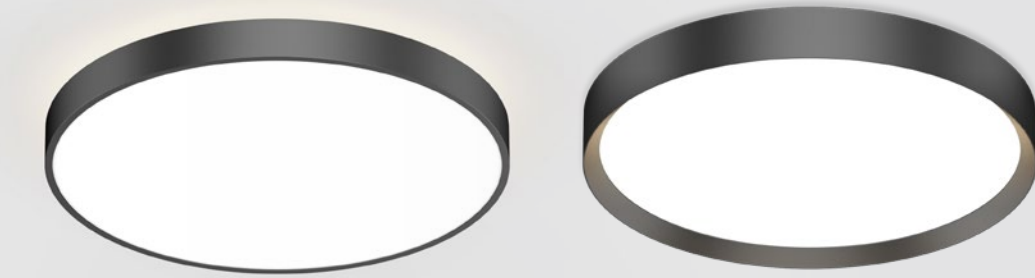


AL99C/D Ceiling light



AL99C/D LED ceiling light is with high efficiency uniform LED lens, Opal or Microprismatic diffuser, AL99C as flat surface, AL99D as curved surface. It can be Up&down lighting and down lighting only. Multiple installation ways available as surface mounted, recessed, suspended. Microwave sensor and emergency are available.



Materials of Housing : Aluminium

Materials of Optics : PS

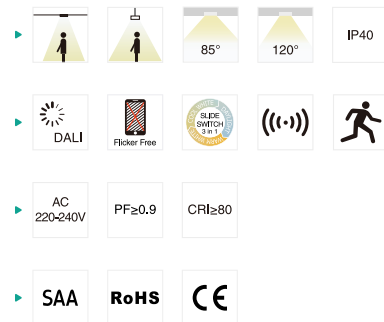

Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
AL99C-16-40W	40W	Ø400x86	Ø220-250	4450lm	2.61	6PCS
AL99C-24-60W	60W	Ø600x86	Ø385-415	6920lm	5.96	2PCS
AL99C-32-75W	75W	Ø800x86	Ø385-415	9100lm	7.17	1PCS
AL99C-40-100W	100W	Ø1000x86	Ø385-415	11920lm	10.83	1PCS
AL99D-16-40W	40W	Ø400x86	Ø220-250	4450lm	2.61	6PCS
AL99D-24-60W	60W	Ø600x86	Ø385-415	6920lm	5.96	2PCS
AL99D-32-75W	75W	Ø800x86	Ø385-415	9100lm	7.17	1PCS
AL99D-40-100W	100W	Ø1000x86	Ø385-415	11920lm	10.83	1PCS

CCT — 3000K — 4000K — 5700K — Finish — White — Black — Wood grain

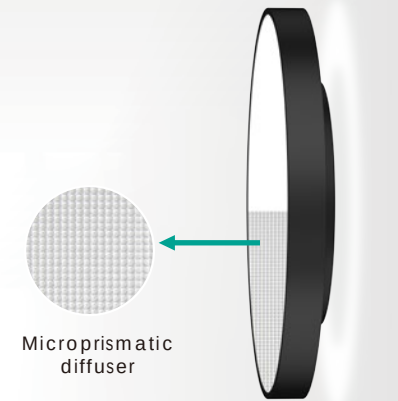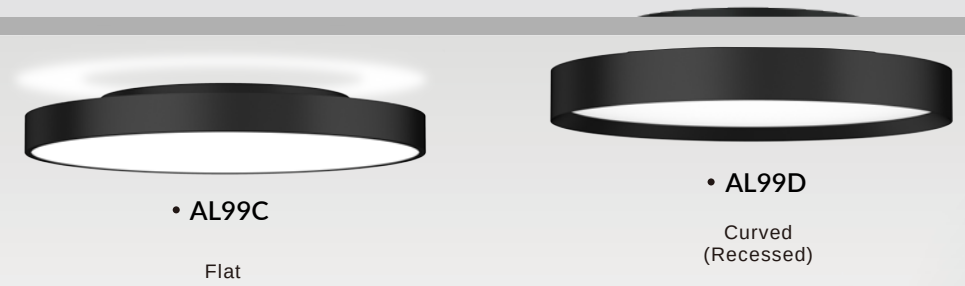


Wall mounted
(Indirect lighting)






AL194 Ceiling light



AL194 is a rectangular led ceiling light, adopting high lumen SMD LED, white and black finish can be provided, DALI dim and interchangeable CCT function are available. Installation way: surface mounted and pendant.

Materials of Housing : Aluminium

Materials of Optics : PS

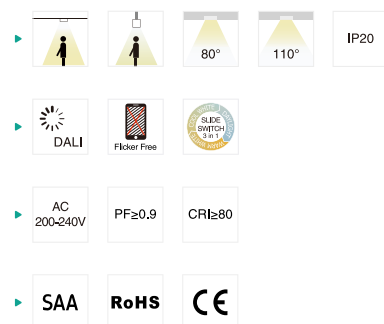

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
AL194-36W	36W	1200x300x72	3600lm	4.50	2PCS
AL194-42W	42W	1200x300x72	4200lm	4.50	2PCS
AL194-50W	50W	1200x300x72	5000lm	4.50	2PCS


CCT — 3000K — 4000K — 5700K

Finish —  White —  Black






AL174/B Ceiling light



AL174 is IP65 water-proof ceiling light, available with adjustable CCT, microwave sensor, PIR sensor triac dim, DALI 2.0 push dim function. Screless surface, ceiling & wall mounting, and quick installation makes it an excellent model. Available for both rear and side cable entry.

Materials of Housing : PC

Materials of Optics : PC

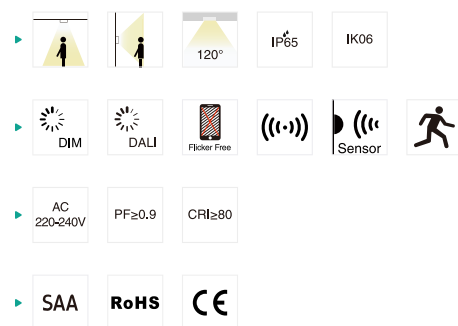



Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
AL174-10-12W	12W	Ø250x70	1350lm	0.52	12PCS
AL174-12-18W	18W	Ø300x70	2030lm	0.85	6PCS
AL174-12-25W	25W	Ø300x70	2670lm	0.85	6PCS
AL174-16-25W	25W	Ø400x79	2750lm	1.38	6PCS
AL174-16-30W	30W	Ø400x79	3350lm	1.38	5PCS
AL174B-12-18W	18W	Ø300x75	2670lm	0.89	6PCS
AL174B-16-25W	25W	Ø400x81	2750lm	1.40	5PCS
AL174B-16-30W	30W	Ø400x81	3350lm	1.40	5PCS

CCT — 3000K — 4000K — 5700K


Finish — — — — — White



AL174 SERIES IP65 LED CEILING LIGHT

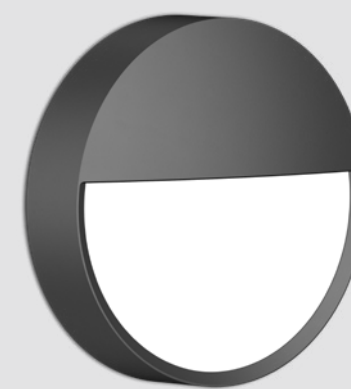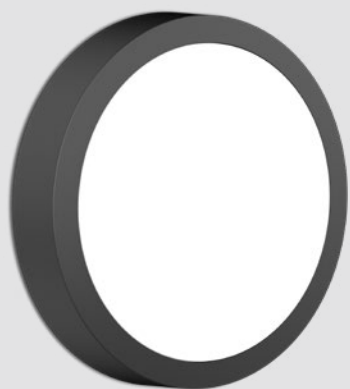


AL96 Bulkhead



AL96 is IP65 and IK10 LED ceiling light, which adopts high lumen SMD LED. Wall mounted and surface mounted for options. Multiple functions such as 3 CCT and power interchangeable, emergency, adjustable sensor, triac/0-10V/ DALI dimmable are available. Available for both rear and side cable entry

Materials of Housing : PC

Materials of Optics : PC

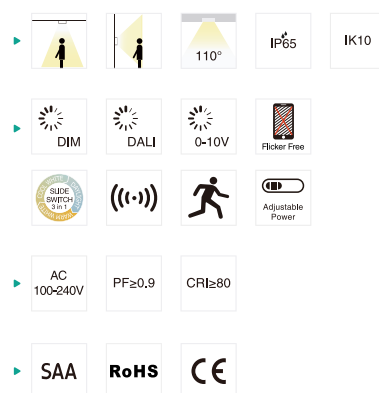


Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
AL96-8-12W	12W	Ø200x60	1250lm	0.48	12PCS
AL96-11-12W	12W	Ø275x60	1300lm	0.85	12PCS
AL96-11-18W	18W	Ø275x60	1850lm	0.85	12PCS
AL96-11-25W	25W	Ø275x60	2530lm	0.85	12PCS
AL96-14-25W	25W	Ø350x60	2530lm	1.38	6PCS
AL96-14-30W	30W	Ø350x60	2920lm	1.38	6PCS

CCT — 3000K — 4000K — 5700K

Finish — White — Black




AL66 Bulkhead



AL66 is IP65 IK08 LED bulkhead, this fixture provides an alternative to the color changeable and emergency function, it is a perfect answer to complete your outdoor look.

Materials of Housing : Aluminium

Materials of Optics : PC




Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
AL66-10-12W	12W	Ø250x74	1100lm	1.10	10PCS

CCT — 3000K — 4000K — 5700K

Finish — Black




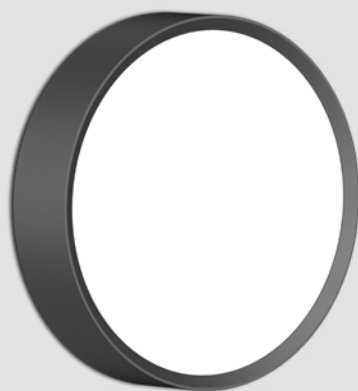

IP **65**
20 JOULES=IK **10**




AL65 Bulkhead



AL65 is IP65 IK08 LED bulkhead, this fixture provides an alternative to the color changeable and emergency function, it is a perfect answer to complete your outdoor look.

Materials of Housing : Aluminium

Materials of Optics : PC

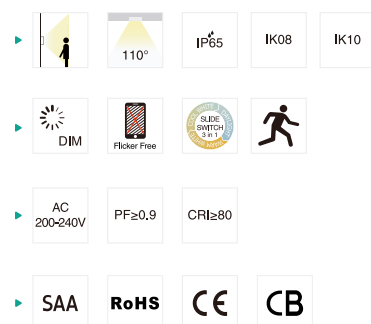


Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
AL65-10-12W	12W	Ø250x58	1250lm	1.05	10PCS
AL65-10-18W	18W	Ø250x58	1850lm	1.15	10PCS

CCT — 3000K — 4000K — 5700K

Finish — — — — — Black


AL65B Bulkhead



AL65 is IP65 IK08 LED bulkhead, this fixture is with four frames options and provides an alternative to color changeable, adjustable sensor and emergency function. It is a perfect answer to complete your outdoor look.

Materials of Housing : Die-casting Aluminium

Materials of Optics : PC


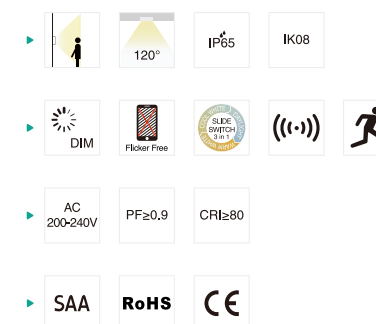


Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
AL65B-10-12W	12W	Ø251x64	1420lm	1.18	10PCS
AL65B-10-18W	18W	Ø251x64	2120lm	1.18	10PCS
AL65B-10-12W	12W	Ø300x64	1400lm	1.49	6PCS
AL65B-10-18W	18W	Ø300x64	2070lm	1.49	6PCS

CCT — 3000K — 4000K — 5700K


Finish — — — — — White — — — — — Black

Ring — — — — —
ACC-AL65B-10-BK-50

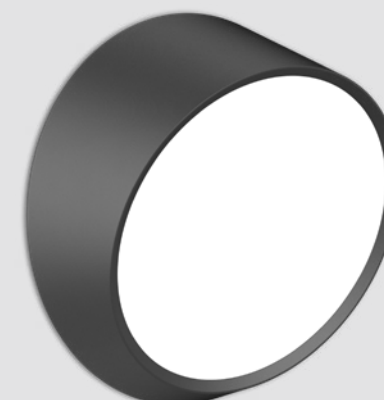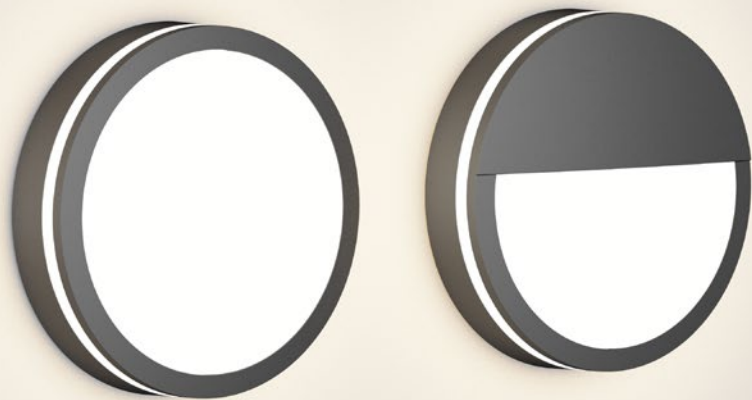

IP **65**
20 JOULES=IK **10**


AL65C Bulkhead



AL65 is IP65 IK08 LED bulkhead, this fixture is with four frames options and provides an alternative to color changeable, adjustable sensor and emergency function, it is a perfect answer to complete your outdoor look.

Materials of Housing : Die-casting Aluminium

Materials of Optics : PC




Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
AL65C-10-12W	12W	Ø251x75	1030lm	1.34	10PCS
AL65C-10-18W	18W	Ø251x75	1530lm	1.34	10PCS
AL65C-10-12W	12W	Ø251x76	720lm	1.44	10PCS
AL65C-10-18W	18W	Ø251x76	970lm	1.44	10PCS

CCT — 3000K — 4000K — 5700K

Finish — White — Black

Ring — ACC-AL65C-10-BK-50 — ACC-AL65C-10-BK-51


AL65D Bulkhead



AL65D LED bulkhead adopts high lumen 2835 SMD light source. It has a high transmittance and uniform light output. High protection level IK06&IP65, high lumen efficiency 100lm/W with 110° beam angel are available. More functions: CCT interchangeable, triac dim wth flicker free and S7 sensor.

Materials of Housing : Die-casting Aluminium

Materials of Optics : PC

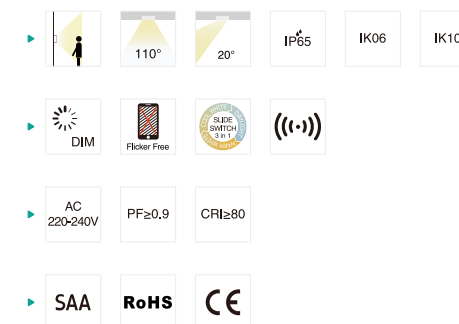


Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
AL65D-10-15W	15W	Ø251x116	1500lm	1.09	12PCS

CCT — 3000K — 4000K — 5700K

Finish — White — Black




AL162/B Bulkhead



AL162 is an IP65 IK08 LED bulkhead with full bezel shape, adopting high lumen SMD LED. It can do CCT interchangeable, adjustable sensor and emergency available. Available for both rear and side cable entry.

Materials of Housing : ABS

Materials of Optics : PC




Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
AL162-12-12W	12W	Ø300x95	1270lm	0.83	6PCS
AL162-12-14W	14W	Ø300x95	1490lm	0.83	6PCS
AL162-12-18W	18W	Ø300x95	1680lm	0.83	6PCS
AL162B-12-12W	12W	Ø300x95	1320lm	0.83	6PCS
AL162B-12-14W	14W	Ø300x95	1540lm	0.83	6PCS
AL162B-12-18W	18W	Ø300x95	1840lm	0.83	6PCS

CCT — 3000K — 4000K — 5700K

Finish — White — Black




AL163/B Bulkhead



AL163 is an IP65 IK08 LED bulkhead with eyelid bezel shape, adopting high lumen SMD LED. It can do CCT interchangeable, adjustable sensor and emergency available. Available for both rear and side cable entry.

Materials of Housing : ABS

Materials of Optics : PC




Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
AL163-12-12W	12W	Ø300x97	1020lm	0.85	6PCS
AL163-12-14W	14W	Ø300x97	1190lm	0.85	6PCS
AL163-12-18W	18W	Ø300x97	1340lm	0.85	6PCS
AL163B-12-12W	12W	Ø300x97	1050lm	0.85	6PCS
AL163B-12-14W	14W	Ø300x97	1190lm	0.85	6PCS
AL163B-12-18W	18W	Ø300x97	1530lm	0.85	6PCS

CCT — 3000K — 4000K — 5700K

Finish — White — Black




AL91 Bulkhead



AL91 is with multiple shapes design, including circle, semicircle, square and oval, adopting high lumen SMD LED. Wall mounted and surface mounted available. The base and shade are detachable which make easier maintenance and installation. Remote sensor control for 15W & 25W. Available for both rear and side cable entry.

Materials of Housing : PC

Materials of Optics : PC

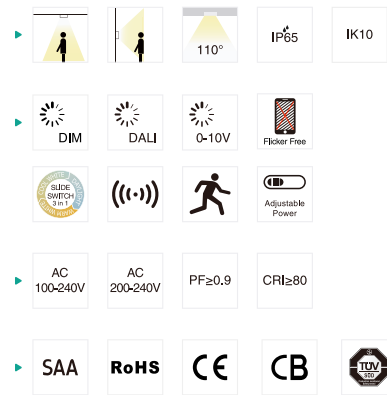


Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
AL91-11-12W-Circle	12W	Ø275x59	1250lm	0.76	12PCS
AL91-11-18W-Circle	18W	Ø275x59	1780lm	0.76	12PCS
AL91-11-25W-Circle	25W	Ø275x59	2450lm	0.76	12PCS
AL91-14-25W-Circle	25W	Ø350x59	2450lm	1.19	6PCS
AL91-14-30W-Circle	30W	Ø350x59	2850lm	1.19	6PCS
AL91-11-12W-Semicircle	12W	Ø275x59	1150lm	0.77	12PCS
AL91-11-18W-Semicircle	18W	Ø275x59	1650lm	0.77	12PCS
AL91-10-12W-Square	12W	242x242x59	1250lm	0.72	12PCS
AL91-10-18W-Square	18W	242x242x59	1780lm	0.72	12PCS
AL91-10-25W-Square	25W	242x242x59	2450lm	0.72	12PCS
AL91-12-12W-Oval	12W	320x230x60	1250lm	0.78	12PCS
AL91-12-18W-Oval	18W	320x230x60	1780lm	0.78	12PCS
AL91-12-25W-Oval	25W	320x230x60	2450lm	0.78	12PCS

CCT — 3000K — 4000K — 5700K

Finish — White — Black


AL91E Bulkhead



AL91E LED ceiling light with modular design which adopts high lumen SMD LED. It has a wide lighting area with down lighting and side lighting. IP65 and IK10 are suitable for outdoor application. Multiple functions: interchangeable CCT and power, adjustable sensor, emergency. And DALI/0-10V/Triac dimmable are available. Available for both rear and side cable entry.

Materials of Housing : PC

Materials of Optics : PC

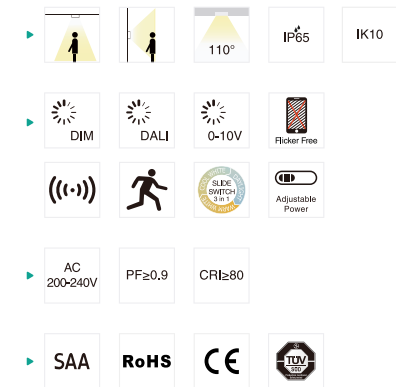

Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
AL91E-11-12W-Circle	15W	Ø275x67	1150lm	0.92	12PCS
AL91E-11-18W-Circle	18W	Ø275x67	1650lm	0.92	12PCS
AL91E-11-25W-Circle	25W	Ø275x67	2250lm	0.92	12PCS
AL91E-11-12W-Semicircle	12W	Ø275x68	750lm	0.95	12PCS
AL91E-11-18W-Semicircle	18W	Ø275x68	1100lm	0.95	12PCS
AL91E-11-25W-Semicircle	25W	Ø275x68	1550lm	0.95	12PCS


CCT — 3000K — 4000K — 5700K

Finish — White — Black

Ring — ACC-AL91E




AL91F Bulkhead

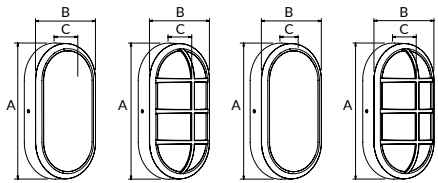

AL91F is IP65 IK08 bulkhead with oval shape and surface frame DIY design, adopting high lumen SMD LED. CCT interchangeable with slide switch and PIR sensor function available. Available for both rear and side cable entry.

Materials of Housing : PC

Materials of Optics : PC






Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
AL91F-8-5W	5W	220x120x66	600lm	0.40	30PCS
AL91F-8-10W	10W	220x120x66	1100lm	0.40	30PCS
AL91F-8-5W	5W	220x120x69	500lm	0.40	30PCS
AL91F-8-10W	10W	220x120x69	900lm	0.40	30PCS
ACC-AL91F-8-BK-50	-	220x120x36.5	-	0.06	30PCS
ACC-AL91F-8-WH-50	-	220x120x36.5	-	0.06	30PCS
ACC-AL91F-8-BK-51	-	220x120x69	-	0.07	30PCS
ACC-AL91F-8-WH-51	-	220x120x69	-	0.07	30PCS

CCT — 3000K — 4000K — 5700K

Finish — White — Black


DIY Design AL91F

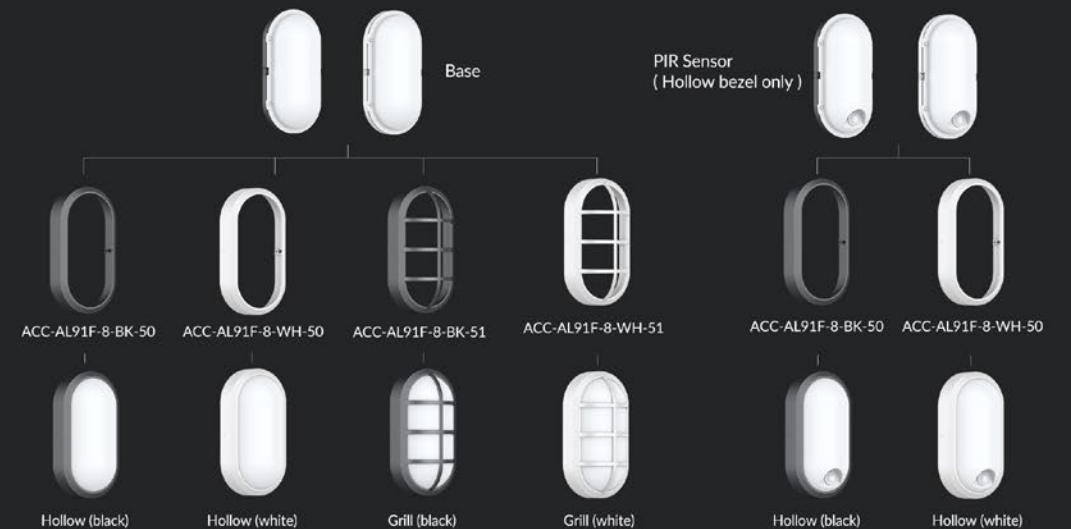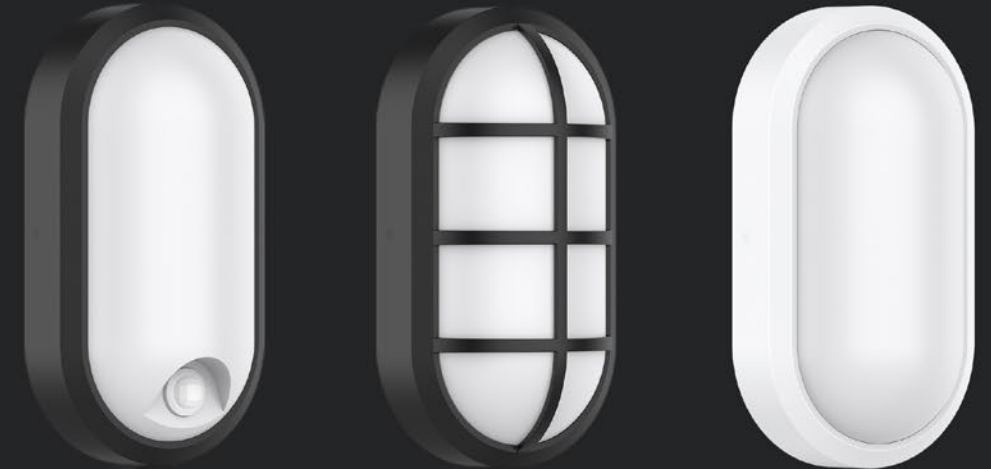

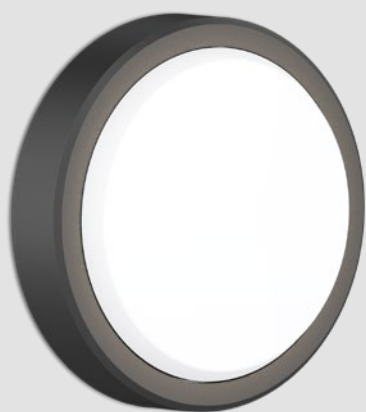

IP **65**
20 JOULES=IK **10**


AL104 Bulkhead

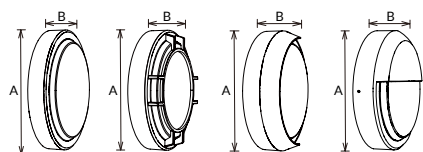

AL104 is IP65 IK10 bulkhead which adopts high lumen SMD LED. This fixture is with four different trims and provides an alternative to color changeable, sensor and emergency functions. Dali and 0-10V dimming is also available.

Materials of Housing : Die-casting Aluminium


Materials of Optics : PC

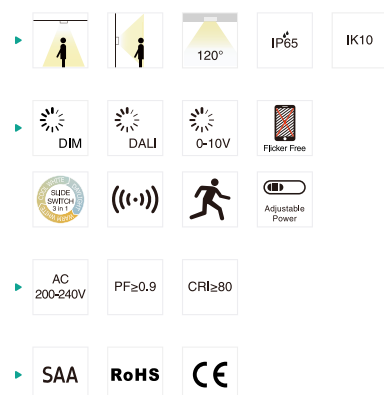

Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
AL104A-10-15W	15W	Ø250X63	1750lm	1.05	10PCS
AL104A-12-25W	25W	Ø300X63	3000lm	1.58	6PCS
AL104B-10-15W	15W	Ø250X68	1500lm	1.15	10PCS
AL104B-12-25W	25W	Ø300X68	2150lm	1.69	6PCS
AL104C-10-15W	15W	Ø250X83	1600lm	1.19	10PCS
AL104C-12-25W	25W	Ø300X83	2600lm	1.73	6PCS
AL104D-10-15W	15W	Ø250X67	1100lm	1.38	10PCS
AL104D-12-25W	25W	Ø300X67	1900lm	2.05	6PCS



CCT ——— 3000K ——— 4000K ——— 5700K

Finish ——— White ——— Black

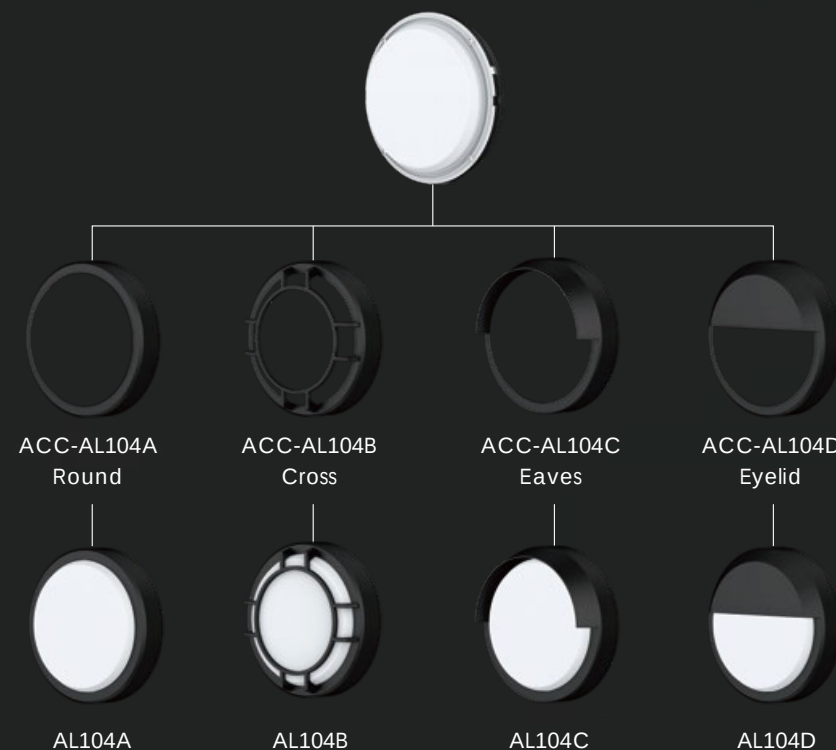


FOUR DIFFERENT TRIMS



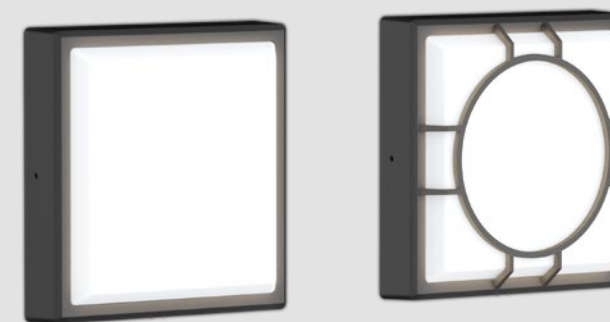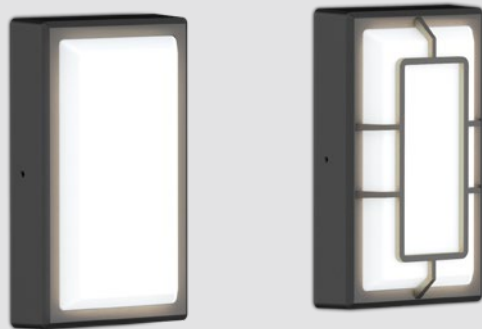

IP **65**
20 JOULES=IK **10**


AL104R Bulkhead




AL104R is IP65 IK10 bulkhead which adopts high lumen SMD LED. AL104R is rectangle. This fixture is with two different trims and provides an alternative to color changeable, sensor and emergency functions. Dali and 0-10V dimming are also available.

Materials of Housing : Die-casting Aluminium


Materials of Optics : PC

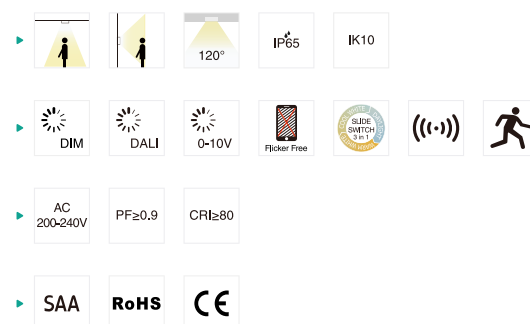

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
AL104R-10-15W	15W	250x150x63	1650lm	0.90	10PCS
AL104R-10-15W	15W	250x150x69	1350lm	0.97	10PCS




AL104S Bulkhead



AL104S is IP65 IK10 bulkhead which adopts high lumen SMD LED. AL104S is square version. This fixture is with two different trims and provides an alternative to color changeable, sensor and emergency functions. Dali and 0-10V dimming are also available.

Materials of Housing : Die-casting Aluminium

Materials of Optics : PC

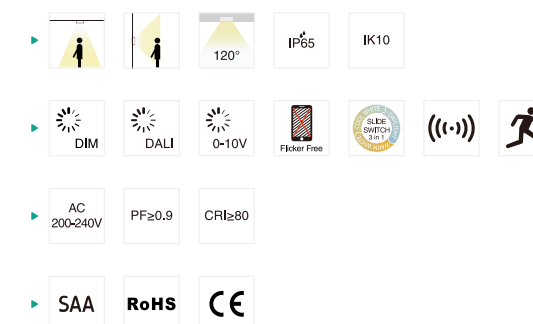

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
AL104S-10-15W	15W	250x250x63	1780lm	0.90	10PCS
AL104S-10-15W	15W	250x250x69	1500lm	0.97	10PCS





LED Track Light

/Series/

LED track light has been around for decades, yet it remains as fresh and contemporary a ceiling light fixture as ever. This is due primarily to its pure modern look, with clean, rigid tracks and streamlined directional heads. But function is also a factor when it comes to a track lighting system, with each of the selected track heads independently and easily adjustable and brightly focused. Complete track lighting kits will also allow you to have a stylish ceiling track lighting systems instantly. IINNO various track light could be your excellent choice!

Contact details

IINNO Ltd

Unit 7, 8/F., Tower B,
83 King Lam Street,
Lai Chi Kok, Kowloon,
Hong Kong

Tel: +852 2134 9906

+86 (0)769 23010151/2

M: +86 13922905402

Email: sales@iinno-lighting.com

www.iinno-lighting.com

