



Commercial Residential Decorative Lighting

Designing your lighting solutions





48V TRACK PRODUCT MEET LOTUS


A new 48V low voltage luminaire range. It's modular, elegant and simple, reflecting European style while taking inspiration from the asian lotus flower. The products offer efficient, adjustable lighting for any setting. With LOTUS, experience the blend of form and function in a modern and straightforward design that illuminates your space sustainably and stylishly.

Discover all range of 48V track system: full safety of the low voltage, easy and efficient installation, elegant design etc.

Full range of designs from pendant long/bowl, flat, pendant glass, pendant deco, spot, linear spot, and linear for various applications.



DC-PD142-50117-12W




Power 12W
 Light flux 850lm
 Beam angle 24°/36°/50°
 Color rendering 90
 Color temp. 2700K/3000K/4000K

Finishes



DC-PD142-50117-12W (Bowl)




Power 12W
 Light flux 1050lm
 Beam angle 100°
 Color rendering 90
 Color temp. 2700K/3000K/4000K

Finishes



DC-PD142-4054-7W



Power 7W
 Light flux 600lm
 Beam angle 36°/45°/60°
 Color rendering 90
 Color temp. 2700K/3000K/4000K

Finishes




Glass

Cage



DC-PD142-5067-9W




Power 9W
 Light flux 700lm
 Beam angle 24°/36°/50°
 Color rendering 90
 Color temp. 2700K/3000K/4000K

Finishes



DC-PD142-5046-7W




Power 7W
 Light flux 380lm/300lm
 Beam angle 75°
 Color rendering 90
 Color temp. 2700K/3000K/4000K

Finishes





DC-TL142-3710-18W




Power 10W/14W/18W
 Light flux 1000lm/1410lm/1820lm
 Beam angle 110°
 Color rendering 90
 Color temp. 2700K/3000K/4000K

Finishes




DC-TL142-3710-18W(Pill)




Power 10W/14W/18W
 Light flux 1000lm/1410lm/1820lm
 Beam angle 110°
 Color rendering 90
 Color temp. 2700K/3000K/4000K

Finishes

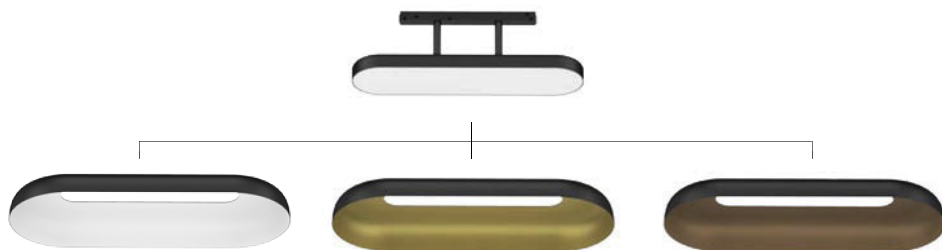


DC-TL142-12-18W




Power 10W/14W/18W
 Light flux 1050lm/1480lm/1900lm
 Beam angle 110°
 Color rendering 90
 Color temp. 2700K/3000K/4000K

Finishes

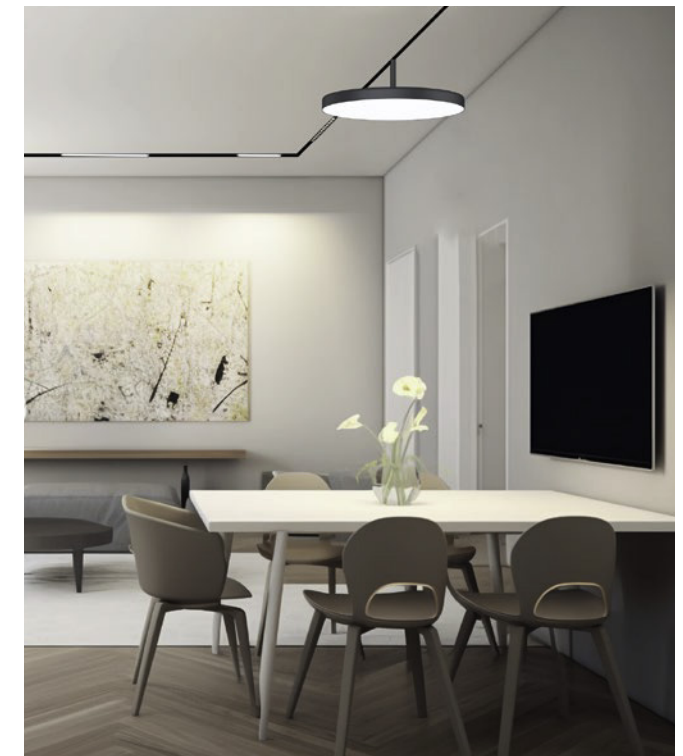



DC-TL142-4054-7W
DC-TL142-4054-14W




Power 7W/14W
 Light flux 600lm/1200lm
 Beam angle 36°/45°/60°
 Color rendering 90
 Color temp. 2700K/3000K/4000K

Finishes



DC-TL142-5067-9W
DC-TL142-5067-18W




Power 9W/18W
 Light flux 700lm/1400lm
 Beam angle 24°/36°/50°
 Color rendering 90
 Color temp. 2700K/3000K/4000K

Finishes



DC-TL142-2350-1.5W



Power 1.5W
 Light flux 130lm
 Beam angle 15°/24°/36°/45°
 Color rendering 90
 Color temp. 2700K/3000K/4000K

Finishes



DC-TL142A-120-8W

Power 8W
 Light flux 560lm
 Beam angle 20°/36°/45°
 Color rendering 90
 Color temp. 2700K/3000K/4000K

Finishes

**DC-TL142A-230-16W**

Power 16W
 Light flux 1200lm
 Beam angle 20°/36°/45°
 Color rendering 90
 Color temp. 2700K/3000K/4000K

Finishes

**DC-TL142A-120-8W(tilt)**

Power 8W
 Light flux 560lm
 Beam angle 20°/36°/45°
 Color rendering 90
 Color temp. 2700K/3000K/4000K

Finishes

**DC-TL142A-230-16W(tilt)**


Power 16W
 Light flux 1200lm
 Beam angle 20°/36°/45°
 Color rendering 90
 Color temp. 2700K/3000K/4000K

Finishes

**DC-TL142B-120-8W**

Power 8W
 Light flux 560lm
 Beam angle 100°
 Color rendering 90
 Color temp. 2700K/3000K/4000K

Finishes

**DC-TL142B-230-16W**

Power 16W
 Light flux 1250lm
 Beam angle 100°
 Color rendering 90
 Color temp. 2700K/3000K/4000K

Finishes





STANDARD TRACK



**PRO-N110 (1000mm) , PRO-N120 (2000mm) ,
PRO-N130 (3000mm) , PRO-N140 (4000mm)**



Standard Version Track - Surface Mount / Pendant Mount

HIGH TRACK



**PRO-DN110 (1000mm) , PRO-DN120 (2000mm) ,
PRO-DN130 (3000mm) , PRO-DN140 (4000mm)**



High Version of Track - Surface Mount / Pendant Mount

RECESSED TRACK



**PRO-RN110 (1000mm) , PRO-RN120 (2000mm) ,
PRO-RN130 (3000mm) , PRO-RN140 (4000mm)**



Recessed Track - Recessed Mount

ACCESSORIES



PRO-N135FL
L-shape connector (L)
- Standard Track
System



PRO-N135FR
L-shape connector (R)
- Standard Track
System



PRO-N135FS
L-shape connector
(Vertical)- Standard
Track System



PRO-N132
End Cap - Standard
Track System



PRO-N1SK
Reinforcement
kit - Standard
Track System



PRO-DN135FL
L-shape connector (L)
- High Track System



PRO-DN135FR
L-shape connector (R)
- High Track System



PRO-DN135FS
L-shape connector
(Vertical) - High
Track System



PRO-DN132
End Cap - High
Track System



PRO-RN135FL
L-shape connector
(L) - Recessed
Track



PRO-RN135FR
L-shape connector (R)
- Recessed Track
System



PRO-RN135FS
L-shape connector
(Vertical) - Recessed
Track System



PRO-RN132
End Cap -
Recessed Track
System



PRO-RNC01
Metal Strip



PRO-N131L
Live-end
connector (Left)



PRO-N131R
Live-end
connector (Right)



PRO-N131
Live-end
connector (I)



PRO-N135
Live-end
connector (L)



PRO-N139
Power Feeder
(Flex)



PRO-EZN147
Ceiling Mount,
EZClick
suspension kit
with 1m rod



PRO-EZN147
Ceiling Mount,
EZClick
suspension kit
with 1.5m wire




PRO-N147
Ceiling mount
reinforcement kit
with 1m rod



PRO-N148
Ceiling mount
reinforcement kit
with 1.5m wire



PRO-N1SK
Mounting Clip

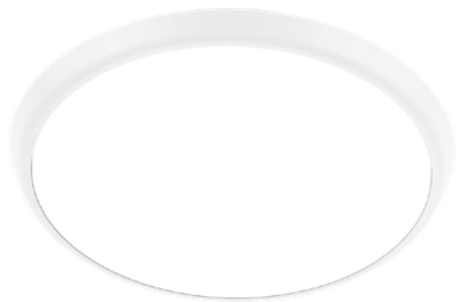


AL08B


LED CEILING LIGHT | LED SMD | Internal driver
PC | PC/ PC+PCR




AL08B-8-12W
AL08D-8-12W




AL08B-10-12W
AL08D-10-12W



AL08B-12-18W
AL08B-12-25W
AL08D-12-18W
AL08D-12-25W



AL08B-14-25W
AL08D-14-25W



AL08B-16-30W
AL08D-16-30W

Code	Voltage	Watt	Lumen(±5%)	Class
AL08B-8-12W	AC200-240V	12W	1300lm	II
AL08B-10-12W	AC200-240V	12W	1300lm	II
AL08B-12-18W	AC200-240V	18W	2060lm	II
AL08B-12-25W	AC200-240V	25W	2650lm	II
AL08B-14-25W	AC200-240V	25W	2900lm	II
AL08B-16-30W	AC200-240V	30W	3360lm	II
AL08D-8-12W	AC200-240V	12W	1200lm	II
AL08D-10-12W	AC200-240V	12W	1300lm	II
AL08D-12-18W	AC200-240V	18W	2130lm	II
AL08D-12-25W	AC200-240V	25W	2900lm	II
AL08D-14-25W	AC200-240V	25W	2790lm	II
AL08D-16-30W	AC200-240V	30W	3530lm	II

Beam Angle


120°

Light Source


CRI≥80 SDCM<6

2700K 3000K 4000K


Gear



Certification




Accessories

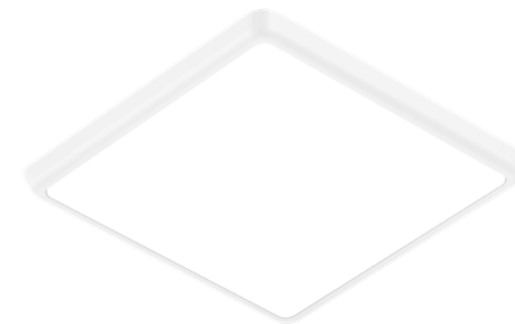


AL12B


LED CEILING LIGHT | LED SMD | Internal driver
PC | PC/ PC+PCR




AL12B-10-12W
AL12D-10-12W



AL12B-12-18W
AL12B-12-25W
AL12D-12-18W
AL12D-12-25W



AL12B-14-25W
AL12D-14-25W



AL12B-16-30W
AL12D-16-30W

Code	Voltage	Watt	Lumen(±5%)	Class
AL12B-10-12W	AC200-240V	12W	1330lm	II
AL12B-12-18W	AC200-240V	18W	1995lm	II
AL12B-12-25W	AC200-240V	25W	2775lm	II
AL12B-14-25W	AC200-240V	25W	2775lm	II
AL12B-16-30W	AC200-240V	30W	3330lm	II
AL12D-10-12W	AC200-240V	12W	1380lm	II
AL12D-12-18W	AC200-240V	18W	2130lm	II
AL12D-12-25W	AC200-240V	25W	2900lm	II
AL12D-14-25W	AC200-240V	25W	2790lm	II
AL12D-16-30W	AC200-240V	30W	3530lm	II

Beam Angle

120°

Light Source


CRI=80 SDCM<6


2700K 3000K 4000K

Gear



Certification




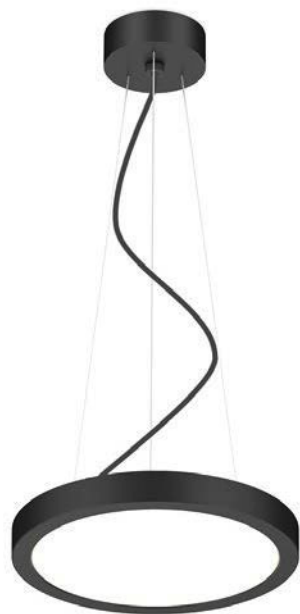


AL149

LED CEILING LIGHT

LED SMD Internal driver
PC PMMA+PS



AL149-10-12W



AL149-12-18W


Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K



AL149-16-25W

Gear



(())


Certification

SAA RoHS CE

Accessories




Code	Voltage	Watt	Lumen(±5%)	Class
AL149-10-12W	AC220-240V	12W	1100lm	II
AL149-12-18W	AC220-240V	18W	1600lm	II
AL149-16-25W	AC220-240V	25W	2150lm	II

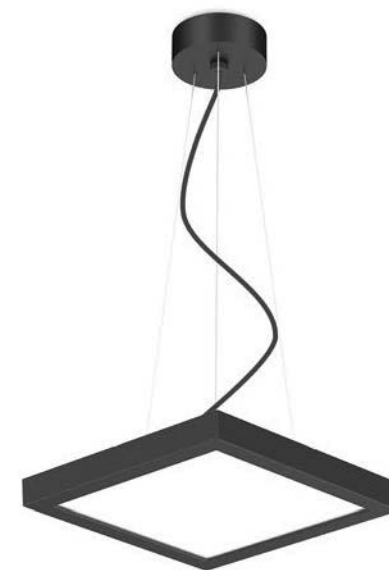

AL149B

LED CEILING LIGHT

LED SMD Internal driver
PC PMMA+PC



AL149B-12-15W



Beam Angle

110°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



(())

Certification

SAA RoHS CE

Accessories



Code	Voltage	Watt	Lumen(±5%)	Class
AL149B-12-15W	AC220-240V	15W	1750lm	II







AL180

LED CEILING LIGHT


LED SMDInternal driver
PCPS



AL180-10-12W
AL180-10-12W-A3



AL180-12-18W
AL180-12-18W-A3



AL180-16-25W
AL180-16-22W-A3

Beam Angle



Light Source

CRI≥80

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE


Code	Voltage	Watt	Lumen(±5%)	Class
AL180-10-12W	AC220-240V	12W	1260lm	II
AL180-10-12W-A3	AC220-240V	8W/10W/12W	1350lm	II
AL180-12-18W	AC220-240V	18W	2180lm	II
AL180-12-18W-A3	AC220-240V	12W/15W/18W	1930lm	II
AL180-16-25W	AC220-240V	25W	2830lm	II
AL180-16-22W-A3	AC220-240V	16W/18W/22W	2550lm	II




AL85

LED CEILING LIGHT

LED SMDInternal driver
PPPP



AL85-10-10W



AL85-12-18W

Beam Angle



Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE

Accessories



ACC-AL85
Nickel Brushed


Code	Voltage	Watt	Lumen(±5%)	Class
AL85-10-10W	AC200-240V	10W	1060lm	II
AL85-12-18W	AC200-240V	18W	1820lm	II
AL85-16-24W	AC200-240V	24W	2600lm	II




AL181

LED CEILING LIGHT

LED SMD Internal driver
PCPC



AL181-10-12W



AL181-12-15W
AL181-12-20W




Beam Angle



Light Source

CRI≥80 SDCM<6



Gear



Certification



Accessories



ACC-AL181-WT-0200

Code	Voltage	Watt	Lumen(±5%)	Class
AL181-10-12W	AC220-240V	12W	1400lm	II
AL181-12-15W	AC220-240V	15W	1720lm	II
AL181-12-20W	AC220-240V	20W	2300lm	II





AL200

LED CEILING LIGHT


LED SMD Internal driver
PCPC



AL200-11-10W
AL200-11-15W
AL200-11-18W



WH



AL200-14-18W
AL200-14-25W
AL200-14-30W

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE


Code	Voltage	Watt	Lumen(±5%)	Class
AL200-11-10W	AC220-240V	10W	1200lm	II
AL200-11-15W	AC220-240V	15W	1800lm	II
AL200-11-18W	AC220-240V	18W	2160lm	II
AL200-14-18W	AC220-240V	18W	2160lm	II
AL200-14-25W	AC220-240V	25W	3000lm	II
AL200-14-30W	AC220-240V	30W	3600lm	II



AL191

LED CEILING LIGHT


LED SMD Internal driver
SPCC PC(Lens) +PMMA(Diffuser)



AL191-10-12W



WH



AL191-13-18W

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE


Code	Voltage	Watt	Lumen(±5%)	Class
AL191-10-12W	AC220-240V	12W	1310lm	I
AL191-13-18W	AC220-240V	18W	1900lm	I
AL191-15-24W	AC220-240V	24W	2540lm	I



AL117

LED CEILING LIGHT


LED SMDInternal driver
PCPC




AL117-8-12W



WH



AL117-11-12W
AL117-11-18W



AL117-14-25W

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE


Code	Voltage	Watt	Lumen(±5%)	Class
AL117-8-12W	AC200-240V	12W	1350lm	II
AL117-11-12W	AC200-240V	12W	1350lm	II
AL117-11-18W	AC200-240V	18W	1950lm	II
AL117-14-25W	AC200-240V	25W	2700lm	II



AL145

LED CEILING LIGHT


LED SMDInternal driver
PCPC



AL145-11-12W
AL145-11-18W



WH



AL145-14-18W
AL145-14-25W

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE


Code	Voltage	Watt	Lumen(±5%)	Class
AL145-11-12W	AC220-240V	12W	1350lm	II
AL145-11-18W	AC220-240V	18W	2100lm	II
AL145-14-18W	AC220-240V	18W	2120lm	II
AL145-14-25W	AC220-240V	25W	2940lm	II



AL87

LED CEILING LIGHT


LED SMDInternal driver
PP



AL87-11-12W
AL87-11-18W
AL87-11-25W



WH



AL87-14-25W
AL87-14-30W

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE


Code	Voltage	Watt	Lumen(±5%)	Class
AL87-11-12W	AC200-240V	12W	1460lm	II
AL87-11-18W	AC200-240V	18W	2200lm	II
AL87-11-25W	AC200-240V	25W	3000lm	II
AL87-14-25W	AC200-240V	25W	2900lm	II
AL87-14-30W	AC200-240V	30W	3300lm	II



AL87B

LED CEILING LIGHT


LED SMDInternal driver
pppp



AL87B-11-25W



WH



AL87B-14-30W

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE


Code	Voltage	Watt	Lumen(±5%)	Class
AL87B-11-25W	AC220-240V	25W	2800lm	II
AL87B-14-30W	AC220-240V	30W	3300lm	II



AL126

LED CEILING LIGHT


LED SMD Internal driver
PC PMMA




AL126-10-12W



WH



AL126-12-18W
AL126-12-24W



AL126-16-24W
AL126-16-30W

Code	Voltage	Watt	Lumen(±5%)	Class
AL126-10-12W	AC220-240V	12W	1300lm	II
AL126-12-18W	AC220-240V	18W	2000lm	II
AL126-12-24W	AC220-240V	24W	2600lm	II
AL126-16-24W	AC220-240V	24W	2600lm	II
AL126-16-30W	AC220-240V	30W	3200lm	II

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification


SAA RoHS CE



AL202

LED CEILING LIGHT


LED SMD Internal driver
PCPC




AL202-10-12W



WH



AL202-12-18W
AL202-12-25W



AL202-16-25W
AL202-16-30W

Code	Voltage	Watt	Lumen(±5%)	Class
AL202-10-12W	AC220-240V	12W	1300lm	II
AL202-12-18W	AC220-240V	18W	1900lm	II
AL202-12-25W	AC220-240V	25W	2700lm	II
AL202-16-25W	AC220-240V	25W	2700lm	II
AL202-16-30W	AC220-240V	30W	3200lm	II

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification


SAA RoHS CE




AL203

LED CEILING LIGHT


LED SMD Internal driver
PCPC



AL203-10-12W



AL203-12-18W
AL203-12-25W



AL203-16-25W
AL203-16-30W

Code	Voltage	Watt	Lumen(±5%)	Class
AL203-10-12W	AC220-240V	12W	1200lm	II
AL203-12-18W	AC220-240V	18W	1800lm	II
AL203-12-25W	AC220-240V	25W	1800lm	II
AL203-16-25W	AC220-240V	25W	2500lm	II
AL203-16-30W	AC220-240V	30W	3000lm	II



WH

Beam Angle


120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification


SAA RoHS CE




AL122

LED CEILING LIGHT


LED SMD Internal driver
SPCC PMMA




AL122-10-12W




AL122-12-16W




AL122-16-24W



AL122(Module)-
10-12W



AL122(Module)-
12-16W



AL122(Module)-
16-24W

Code	Voltage	Watt	Lumen(±5%)	Class
AL122-10-12W	AC220-240V	12W	1250lm	I
AL122-12-16W	AC220-240V	16W	1650lm	I
AL122-16-24W	AC220-240V	24W	2350lm	I
AL122(Module)-10-12W	AC220-240V	12W	1650lm	I
AL122(Module)-12-16W	AC220-240V	16W	2150lm	I
AL122(Module)-16-24W	AC220-240V	24W	3200lm	I



WH

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification


SAA RoHS CE




AL47

LED CEILING LIGHT


LED SMD Internal driver
PC PC/ PC+PCR



AL47-10-12W
AL47D-10-12W



AL47-12-18W
AL47-12-25W
AL47D-12-18W
AL47D-12-25W



AL47-16-25W
AL47-16-30W
AL47D-16-25W
AL47D-16-30W

Code	Voltage	Watt	Lumen(±5%)	Class
AL47-10-12W	AC200-240V	12W	1200lm	II
AL47-12-18W	AC200-240V	18W	1900lm	II
AL47-12-25W	AC200-240V	25W	2560lm	II
AL47-16-25W	AC200-240V	25W	2550lm	II
AL47-16-30W	AC200-240V	30W	3020lm	II
AL47D-10-12W	AC200-240V	12W	1350lm	II
AL47D-12-18W	AC200-240V	18W	2100lm	II
AL47D-12-25W	AC200-240V	25W	2600lm	II
AL47D-16-25W	AC200-240V	25W	2900lm	II
AL47D-16-30W	AC200-240V	30W	3400lm	II



WH

Beam Angle

★120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification


SAA RoHS CE




AL47(Square)

LED CEILING LIGHT

LED SMD Internal driver
PC PC/ PC+PCR



AL47(Square)-12-18W
AL47(Square)-12-25W



AL47(Square)-16-25W
AL47(Square)-16-30W



WH

Beam Angle

★120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification


SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
AL47(Square)-12-18W	AC200-240V	18W	1920lm	II
AL47(Square)-12-25W	AC200-240V	25W	2670lm	II
AL47(Square)-16-25W	AC200-240V	25W	2610lm	II
AL47(Square)-16-30W	AC200-240V	30W	3160lm	II

AL175

LED CEILING LIGHT

LED SMD Internal driver
PC(LED module)+Iron(Decorative ring) PC



AL175-10-12W



WH

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K


Gear



Certification

SAA RoHS CE

Accessories



ACC-AL175-10/12/16-WT-50

ACC-AL175-10/12/16-WT-52

ACC-AL175-10/12/16-BK-51



ACC-AL149-WT/BK-0200

Code	Voltage	Watt	Lumen(±5%)	Class
AL175-10-12W	AC220-240V	12W	1500lm	II
AL175-12-18W	AC220-240V	18W	2350lm	II
AL175-16-24W	AC220-240V	24W	3300lm	II






AL170

LED CEILING LIGHT


LED SMD Internal driver
PCPC




AL170-12-18W



AL170-16-18W
AL170-16-25W



Code	Voltage	Watt	Lumen(±5%)	Class
AL170-12-18W	AC220-240V	18W	1900lm	II
AL170-16-18W	AC220-240V	18W	1900lm	II
AL170-16-25W	AC220-240V	25W	2700lm	II

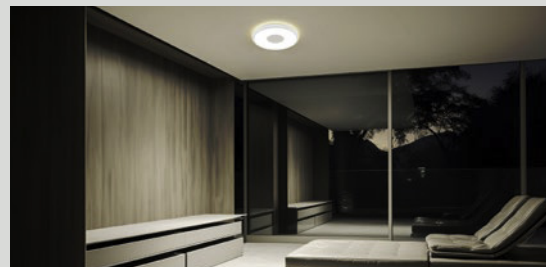

WH

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



ON/OFF


Certification

SAA RoHS CE

AL187

LED CEILING LIGHT

LED SMD Internal driver
PC(LED module) Polyester Fiber(Acoustic ring)



AL187-12-10W
AL187-12-15W
AL187-12-18W



WH

Beam Angle

110°

Light Source

CRI≥80

2700K 3000K 4000K

Gear



ON/OFF

Certification

SAA RoHS CE

Accessories



ACC-AL187-12-GR/GN/BU/BK-50

ACC-AL187-12-GR/GN/BU/BK-51

ACC-AL187-12-GR/GN/BU/BK-52


ACC-AL166-WT/BK-0200




AL148

LED CEILING LIGHT

LED SMD Internal driver
PCPC




AL148-12-15W



AL148-16-25W

Code	Voltage	Watt	Lumen(±5%)	Class
AL148-12-15W	AC220-240V	15W	1580lm	II
AL148-16-25W	AC220-240V	25W	2620lm	II

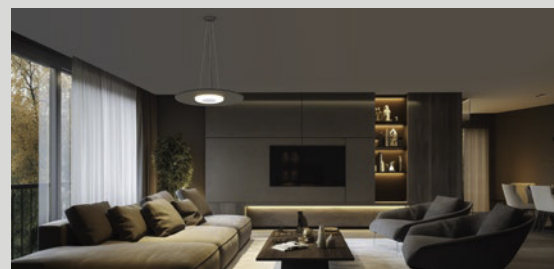

WH

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE

Accessories




ACC-AL148-WT-0200


AL141

LED CEILING LIGHT

LED SMD Internal driver
PCPC



AL141-12-12W
AL141-12-18W



AL141-16-18W
AL141-16-25W



WH

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE

Accessories



ACC-AL141-WT-0200


Code	Voltage	Watt	Lumen(±5%)	Class
AL141-12-12W	AC220-240V	12W	1320lm	II
AL141-12-18W	AC220-240V	18W	1650lm	II
AL141-12-18W	AC220-240V	18W	1750lm	II
AL141-16-25W	AC220-240V	25W	2550lm	II




AL41A

LED CEILING LIGHT

LED SMDInternal driver
PCPC



AL41A-12-18W



AL41A-16-25W

Beam Angle



Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE


Code	Voltage	Watt	Lumen(±5%)	Class
AL41A-12-18W	AC200-240V	18W	1710lm	II
AL41A-16-25W	AC200-240V	25W	2370lm	II



AL41B

LED CEILING LIGHT

LED SMDInternal driver
PCPC



AL41B-12-18W



Beam Angle



Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification


SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
AL41B-12-18W	AC200-240V	12W	1710lm	II
AL41B-16-25W	AC200-240V	25W	2370lm	II




AL24A

LED CEILING LIGHT LED SMD Internal driver
PC Aluminium



AL24A-12-18W
AL24A-12-25W



AL24A-16-35W

Beam Angle



Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification




Code	Voltage	Watt	Lumen(±5%)	Class
AL24A-12-18W	AC200-240V	12W	1450lm	I
AL24A-12-25W	AC200-240V	25W	2000lm	I
AL24A-16-35W	AC200-240V	35W	3100lm	I



AL24B

LED CEILING LIGHT LED SMD Internal driver
PC Aluminium

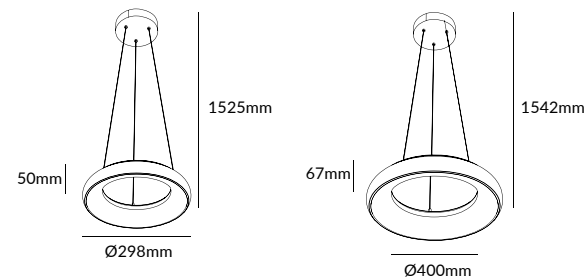

AL24B-12-18W
AL24B-12-25W

AL24B-16-35W



Beam Angle



Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K


Gear



Certification




Code	Voltage	Watt	Lumen(±5%)	Class
AL24B-12-18W	AC200-240V	18W	1450lm	I
AL24B-12-25W	AC200-240V	25W	2000lm	I
AL24B-16-35W	AC200-240V	35W	3100lm	I

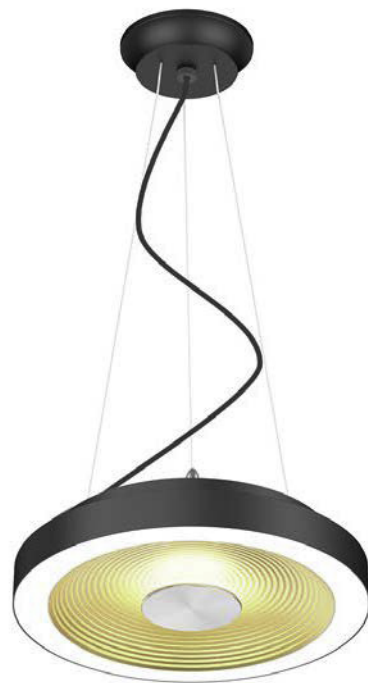


AL173

LED CEILING LIGHT

LED SMD Internal driver
PCPC



AL173-12-18W



AL173-16-25W



Beam Angle

120°

Light Source

CRI ≥ 80 SDCM < 6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE

Accessories



ACC-AL166-WT/
BK-0200


Code	Voltage	Watt	Lumen(±5%)	Class
AL173-12-18W	AC220-240V	18W	1200lm	II
AL173-16-25W	AC220-240V	25W	1750lm	II






WL146


WALL LIGHT LED SMD Internal driver
Aluminium PMMA




WL146-180-8W



WL146-240-10W



WL146-360-16W



WL146-600-20W

Code	Voltage	Watt	Lumen(±5%)	Class
WL146-180-8W	AC220-240V	8W	1000lm	I
WL146-240-10W	AC220-240V	10W	1200lm	I
WL146-360-16W	AC220-240V	16W	1900lm	I
WL146-600-20W	AC220-240V	20W	2300lm	I

Beam Angle

★40°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear




Certification


SAA RoHS CE

WL102

WALL LIGHT LED SMD Internal driver
Aluminium+PC PC



WL102-8W



Beam Angle

★120°

Light Source

CRI≥80 SDCM<6


2700K 3000K 4000K

Gear



Certification


SAA RoHS CE

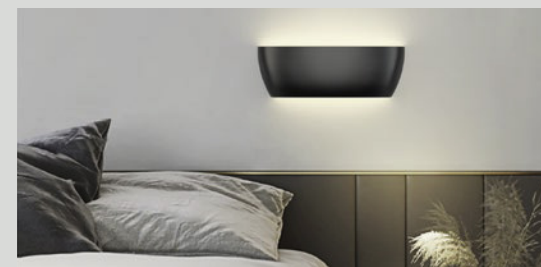


WL107

WALL LIGHT

LED SMD Internal driver
Aluminium PC



WL107A-5W
WL107A-8W



WL107B-5W
WL107B-8W



Beam Angle



Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



ON/OFF



DIM



Flicker Free

PF≥0.9




Certification

SAA RoHS CE

WL117

WALL LIGHT

LED SMD Internal driver
Aluminium PC



WL117-8W



Beam Angle



Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



ON/OFF



DIM




Flicker Free

PF≥0.88



Certification

SAA RoHS CE

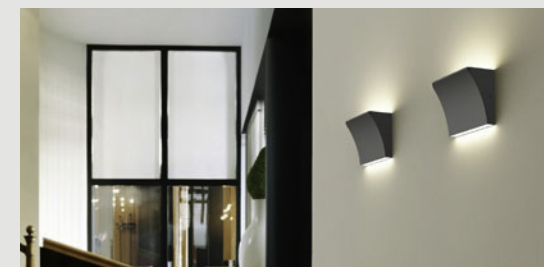




WL106

WALL LIGHT

LED SMD Internal driver
Aluminium+PC PC



WL106-8W



Beam Angle

★160°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE


Code	Voltage	Watt	Lumen(±5%)	Class
WL106-8W	AC220-240V	2×4W	730lm	I



WL101

WALL LIGHT

LED SMD Internal driver
Aluminium+SPCCPC



WL101-8W



Beam Angle


★90°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE


Code	Voltage	Watt	Lumen(±5%)	Class
WL101-8W	AC220-240V	2×4W	700lm	I



WL95

WALL LIGHT

LED SMD Internal driver
Aluminium PC



WL95-8W-C2
WL95-8W-P2

Code	Voltage	Watt	Lumen(±5%)	Class
WL95-8W-C2	AC220-240V	8W	435lm	I
WL95-8W-P2	AC220-240V	8W	425lm	I



IP40



Beam Angle

★360°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



ON/OFF



DIM



Flicker Free

PF≥0.9




Certification

SAA RoHS CE

WL99

WALL LIGHT


LED SMD Internal driver
Aluminium PC



WL99-10W
WL99-10W-D



IP20



Beam Angle

★120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



ON/OFF



Flicker Free

PF≥0.9

Certification

SAA RoHS CE


Code	Voltage	Watt	Lumen(±5%)	Class
WL99-10W	AC100-240V	10W	750lm	I
WL99-10W-D	AC100-240V	10W	700lm	I




WL175A

WALL LIGHT


LED SMD Internal driver
Aluminium PC



WL175A-680-34W
WL175A-680-50W



WL175A-980-50W
WL175A-980-60W



WL175A-1280-50W
WL175A-1280-60W

Code	Voltage	Watt	Lumen(±5%)	Class
WL175A-680-34W	AC220-240V	34W	4000lm	I
WL175A-680-50W	AC220-240V	50W	6000lm	I
WL175A-980-50W	AC220-240V	50W	6000lm	I
WL175A-980-60W	AC220-240V	60W	8000lm	I
WL175A-1280-50W	AC220-240V	50W	6000lm	I
WL175A-1280-60W	AC220-240V	60W	8000lm	I



WH

Beam Angle

★90° ▼60°

Light Source

CRI≥90 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DALI Flicker Free PF≥0.95

Certification


SAA RoHS CE




WL175B

WALL LIGHT

LED SMD Internal driver
Aluminium PC



WL175B-680-34W
WL175B-680-50W



WL175B-980-50W
WL175B-980-60W



WL175B-1280-50W
WL175B-1280-60W

Code	Voltage	Watt	Lumen(±5%)	Class
WL175B-680-34W	AC220-240V	34W	4000lm	I
WL175B-680-50W	AC220-240V	50W	6000lm	I
WL175B-980-50W	AC220-240V	50W	6000lm	I
WL175B-980-60W	AC220-240V	60W	8000lm	I
WL175B-1280-50W	AC220-240V	50W	6000lm	I
WL175B-1280-60W	AC220-240V	60W	8000lm	I



WH

Beam Angle

★90° ▼60°

Light Source

CRI≥90 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DALI Flicker Free PF≥0.95

Certification


SAA RoHS CE




WL175C

WALL LIGHT

LED SMD Internal driver
Aluminium PC



WL175C-680-34W
WL175C-680-50W



WL175C-980-50W
WL175C-980-60W



WL175C-1280-50W
WL175C-1280-60W

Code	Voltage	Watt	Lumen(±5%)	Class
WL175C-680-34W	AC220-240V	34W	4000lm	I
WL175C-680-50W	AC220-240V	50W	6000lm	I
WL175C-980-50W	AC220-240V	50W	6000lm	I
WL175C-980-60W	AC220-240V	60W	8000lm	I
WL175C-1280-50W	AC220-240V	50W	6000lm	I
WL175C-1280-60W	AC220-240V	60W	8000lm	I



WH

Beam Angle

★90° ★60°

Light Source

CRI≥90 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DALI Flicker Free PF≥0.95

Certification


SAA RoHS CE




WL170

WALL LIGHT


LED SMD Internal driver
Aluminium PC



WL170-1200-20W



WL170-1500-25W



WL170-1800-28W



WH BK

Beam Angle

★100°

Light Source

CRI≥80 SDCM<6


2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9

Certification


SAA RoHS CE



WL173

WALL LIGHT

LED SMD Internal driver
Aluminium PC



WL173-8W-D



Beam Angle

★120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification


SAA RoHS CE




WL122

WALL LIGHT

LED SMD Internal driver
Aluminium PC



WL122-8W



Beam Angle

★120°

Light Source

CRI≥80 SDCM<6


2700K 3000K 4000K

Gear



Certification


SAA RoHS CE

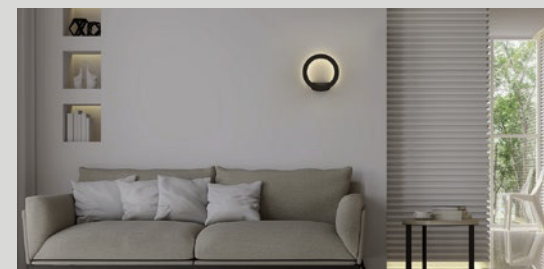




WL126

WALL LIGHT LED SMD Internal driver
Aluminium PC



WL126A-3W



WL126B-3W



Beam Angle

60°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification


SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
WL126A-3W	AC220-240V	3W	98lm(BK)/155lm(WH)	I
WL126B-3W	AC220-240V	3W	90lm(BK)/155lm(WH)	I



WL141

WALL LIGHT LED SMD Internal driver
Aluminium PC

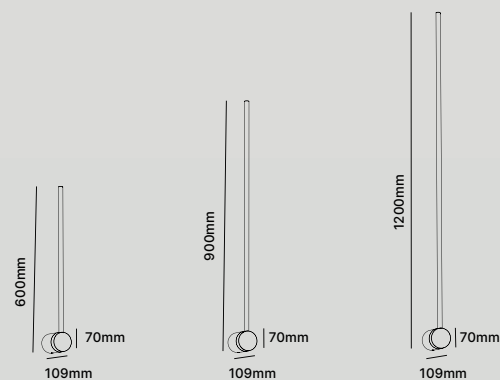

WL141A-12W
WL141B-12W

WL141A-15W
WL141B-15W

WL141A-20W
WL141B-20W

Code	Voltage	Watt	Lumen(±5%)	Class
WL141A-12W	AC220-240V	12W	1190lm	I
WL141A-15W	AC220-240V	15W	1550lm	I
WL141A-20W	AC220-240V	20W	2100lm	I
WL141B-12W	AC220-240V	12W	1170lm	I
WL141B-15W	AC220-240V	15W	1550lm	I
WL141B-20W	AC220-240V	20W	2100lm	I



Beam Angle


120°

Light Source

CRI≥80 CRI≥90 SDCM<6

2700K 3000K 4000K

Gear



Certification


SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
WL141A-12W	AC220-240V	12W	1190lm	I
WL141A-15W	AC220-240V	15W	1550lm	I
WL141A-20W	AC220-240V	20W	2100lm	I
WL141B-12W	AC220-240V	12W	1170lm	I
WL141B-15W	AC220-240V	15W	1550lm	I
WL141B-20W	AC220-240V	20W	2100lm	I

WL134

WALL LIGHT

LED SMD Internal driver
Aluminium PC/PC+PMMA

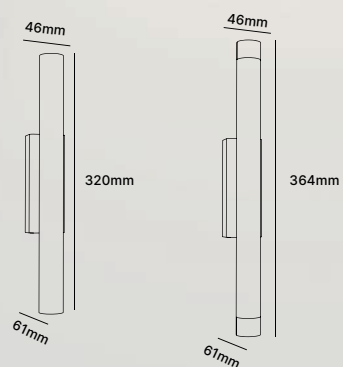


WL134A-4W

WL134B-4W



Beam Angle



Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification




Code	Voltage	Watt	Lumen(±5%)	Class
WL134A-4W	AC220-240V	4W	510lm	I
WL126B-3W	AC220-240V	3W	450lm	I

WL100

WALL LIGHT



LED COB Internal driver
Aluminium PC

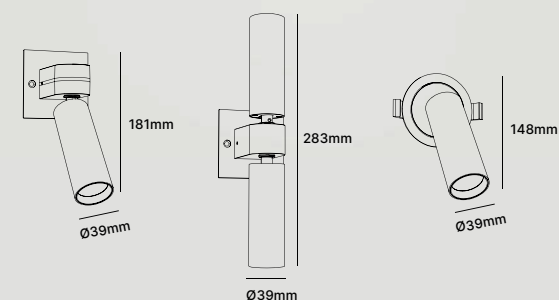


WL100A-5W-D

WL100B-10W-D

WL100C-5W-D



Beam Angle



Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification




Code	Voltage	Watt	Lumen(±5%)	Class
WL100A-5W-D	AC220-240V	5W	600lm	I
WL100B-10W-D	AC220-240V	10W	1100lm	I
WL100C-5W-D	AC220-240V	5W	600lm	I



WL109

WALL LIGHT

LED SMD Internal driver
Aluminium+PC PC



WL109-4W



Beam Angle

100°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
WL109-6-4W	AC220-240V	4W	550lm	I







WL109

WALL LIGHT


LED SMD External driver
Aluminium ADC12 Glass




WL02-7070-3W
60×60mm



WL02-11070-3W
100×60mm




WL02-20070-3W
190×60mm



WL02-200135-8W
190×125mm

Code	Voltage	Watt	Lumen(±5%)	Class
WL02-7070-3W	AC100-240V	3W	220lm	II
WL02-11070-3W	AC100-240V	3W	220lm	II
WL02-20070-3W	AC100-240V	3W	220lm	II
WL02-200135-8W	AC100-240V	8W	580lm	II



Beam Angle

60°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF Flicker Free PF≥0.5

Certification


SAA RoHS CE



WL161


WALL LIGHT

LED SMD Internal driver
Aluminium PC



DC-WL161A-3W
DC-WL161B-3W
WL161A-3W
WL161B-3W

Ø45mm



Beam Angle

30° Asymmetric 30°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K



Gear

ON/OFF Flicker Free PF≥0.5

Certification

SAA RoHS CE

Accessories

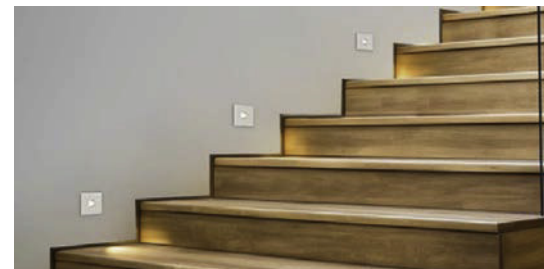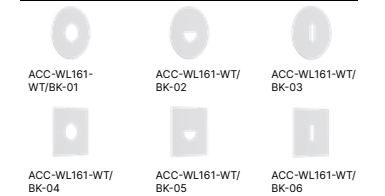





WL124

WALL LIGHT

LED SMD Internal driver
PCPC




WL124A-1W
WL124A-2W



WL124B-1W
WL124B-2W

Code	Voltage	Watt	Lumen(±5%)	Class
WL124A-1W	AC200-240V	1W	40lm	II
WL124A-2W	AC200-240V	2W	80lm	II
WL124B-1W	AC200-240V	1W	40lm	II
WL124B-2W	AC200-240V	2W	80lm	II



WH

Beam Angle

80° 90°

Light Source

CRI≥90 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF Flicker Free PF≥0.35 (())) Sensor

Certification


SAA RoHS CE



WL136

BED LIGHT

LED SMD Internal driver
Die-casting Aluminium+PC



WL136-3W



WH BK

Beam Angle

45°

Light Source

CRI≥80 SDCM<6


Contact details






WL127


BED LIGHT LED SMD Internal driver
Aluminium PC




WL127A-3W



WL127C-3W




WL127B-3W



WL127D-3W

Code	Voltage	Watt	Lumen(±5%)	Class
WL127A-3W	AC220-240V	3W	260lm	I
WL127B-3W	AC220-240V	3W	260lm	I
WL127C-3W	AC220-240V	3W	260lm	I
WL127D-3W	AC220-240V	3W	260lm	I



Beam Angle



Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



PF≥0.4


Certification

SAA RoHS CE




WL135

BED LIGHT LED SMD Internal driver
Die-casting Aluminium+PC PC



WL135A-3W-T



WL135B-3W-T

Code	Voltage	Watt	Lumen(±5%)	Class
WL135A-3W-T	AC220-240V	17W	280lm	I
WL135B-3W-T	AC220-240V	17W	280lm	I



Beam Angle



Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



ON/OFF



Flicker Free

PF≥0.9

Certification

SAA RoHS CE

Accessories



ACC-WL135-WT-0000






WL68

BED LIGHT

LED SMD Internal driver
Aluminium+PC PC



WL68-9W
WL68-9W-T



Beam Angle



Light Source

CRI≥80 CRI≥90

2700K 3000K 4000K

Gear



PF≥0.9

Certification

SAA RoHS CE


Code	Voltage	Watt	Lumen(±5%)	Class
WL68-9W	AC200-240V	9W	650lm	I
WL68-9W-T	AC200-240V	9W	650lm	I




WL69

BED LIGHT


LED SMD Internal driver
Iron+PC



WL69A-5W-D



WL69B-5W-D



Beam Angle



Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



PF≥0.9

Certification

SAA RoHS CE


Code	Voltage	Watt	Lumen(±5%)	Class
WL69A-5W-D	AC220-240V	5W	420lm	II
WL69B-5W-D	AC220-240V	5W	420lm	II




ML25

MIRROR LIGHT


LED SMD Internal driver
Aluminium+PC PC



ML25-600-8W



ML25-900-10W



Beam Angle

★140°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE


Code	Voltage	Watt	Lumen(±5%)	Class
ML25-600-8W	AC220-240V	8W	850lm	I
ML25-900-10W	AC220-240V	10W	1150lm	I




ML15

MIRROR LIGHT


LED SMD Internal driver
Aluminium+PC PC



ML15-450-8W



ML15-600-10W



Beam Angle

★140°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE


Code	Voltage	Watt	Lumen(±5%)	Class
ML15-450-8W	AC200-240V	8W	880lm	I
ML15-600-10W	AC200-240V	10W	1200lm	I




ML26A

MIRROR LIGHT

LED SMD Internal driver
Aluminium PC



ML26A-450-5W



ML26A-555-8W
ML26A-555-10W

Beam Angle

175°x110°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE CB

Code	Voltage	Watt	Lumen(±5%)	Class
ML26A-450-5W	AC220-240V	5W	700lm	I
ML26A-555-8W	AC220-240V	8W	1200lm	I
ML26A-555-10W	AC220-240V	10W	1400lm	I
ML26A-855-8W	AC220-240V	8W	1200lm	I
ML26A-855-12W	AC220-240V	12W	1700lm	I


ML26B

MIRROR LIGHT

LED SMD Internal driver
Aluminium PC



ML26A-495-5W



ML26A-600-8W
ML26A-600-10W

Beam Angle

175°x110°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE CB


Code	Voltage	Watt	Lumen(±5%)	Class
ML26B-495-5W	AC220-240V	5W	700lm	I
ML26B-600-8W	AC220-240V	8W	1200lm	I
ML26B-600-10W	AC220-240V	10W	1400lm	I
ML26B-900-8W	AC220-240V	8W	1200lm	I
ML26B-900-12W	AC220-240V	12W	1700lm	I




ML13

MIRROR LIGHT


LED SMD Internal driver
PCPC



ML13-480-8W



ML13-600-10W



ML13-900-15W

Code	Voltage	Watt	Lumen(±5%)	Class
ML13-480-8W	AC200-240V	8W	1010lm	II
ML13-600-10W	AC200-240V	10W	1270lm	II
ML13-900-15W	AC200-240V	15W	1900lm	II



Beam Angle




Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear




Certification

SAA RoHS CE CB


ML28

MIRROR LIGHT


LED SMD Internal driver
Aluminium PC




ML28-600-15W



ML28-900-20W



ML28-1200-30W



ML28-1500-35W

Code	Voltage	Watt	Lumen(±5%)	Class
ML28-600-15W	AC220-240V	15W	1900lm	I
ML28-900-20W	AC220-240V	20W	2600lm	I
ML28-1200-30W	AC220-240V	30W	3700lm	I
ML28-1500-35W	AC220-240V	35W	4200lm	I



Beam Angle



Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification


SAA RoHS CE



ML32A

MIRROR LIGHT


LED SMD
PCPC Internal driver



ML32A-500-8W




WH



ML32A-800-12W

Beam Angle

120°



ML32A-1000-20W

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



PF≥0.9



Certification


SAA RoHS CE CB

Code	Voltage	Watt	Lumen(±5%)	Class
ML32A-500-8W	AC220-240V	8W	890lm	II
ML32A-800-12W	AC220-240V	12W	1370lm	II
ML32A-1000-20W	AC220-240V	20W	2250lm	II

ML32B

MIRROR LIGHT


LED SMDInternal driver
PCPC



ML32B-500-8W




WH



ML32B-800-12W

Beam Angle

120°



ML32B-1000-20W

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



PF≥0.9



Certification


SAA RoHS CE CB

Code	Voltage	Watt	Lumen(±5%)	Class
ML13-480-8W	AC200-240V	8W	1010lm	I
ML13-600-10W	AC200-240V	10W	1270lm	I
ML13-900-15W	AC200-240V	15W	1900lm	I

ML32C

MIRROR LIGHT

LED SMD Internal driver
PCPC



ML32C-500-8W



WH

Beam Angle


120°

Light Source

CRI≥80 SDCM<6


2700K 3000K 4000K

Gear



Certification


SAA RoHS CE

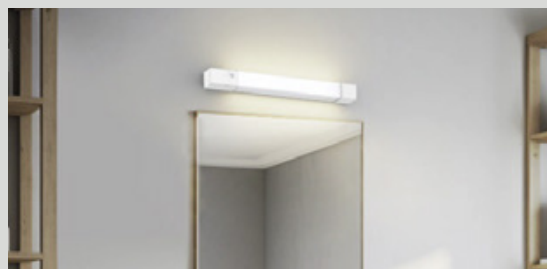


ML27

MIRROR LIGHT


LED SMD Internal driver
Aluminium+PC



ML27-600-12W



ML27-900-20W



ML27-1200-32W



WH BK

Beam Angle

160°x110°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification


SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
ML27-600-12W	AC220-240V	12W	1600lm	I
ML27-900-20W	AC220-240V	20W	2600lm	I
ML27-1200-32W	AC220-240V	32W	4000lm	I



ML17

LED SMD Internal driver
MIRROR LIGHT PC



ML17-450-10W
ML17-450-13W



WH

Beam Angle


120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
ML17-450-10W	AC200-240V	10W	1100lm	I
ML17-450-13W	AC200-240V	13W	1420lm	I







ML35

MIRROR LIGHT

LED SMD Internal driver
Aluminium+PC PC



ML35-600-8W
ML35-600-12W



ML35-900-12W
ML35-900-15W

Beam Angle

160°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K


Gear



Certification

SAA RoHS CE


Code	Voltage	Watt	Lumen(±5%)	Class
ML35-600-8W	AC220-240V	8W	1050lm	I
ML35-600-12W	AC220-240V	12W	1550lm	I
ML35-900-12W	AC220-240V	12W	1550lm	I
ML35-900-15W	AC220-240V	15W	1900lm	I

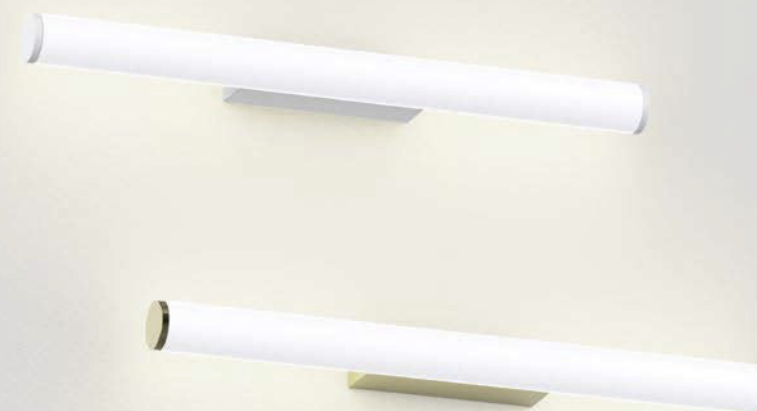


ML34

MIRROR LIGHT

LED SMD Internal driver
PCPC



ML34-450-6W



ML34-600-8W
ML34-600-10W

Beam Angle

160°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification


SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
ML34-450-6W	AC220-240V	6W	830lm	I
ML34-600-8W	AC220-240V	8W	1200lm	I
ML34-600-10W	AC220-240V	10W	1400lm	I
ML34-900-12W	AC220-240V	12W	1650lm	I
ML34-900-15W	AC220-240V	15W	2100lm	I




ML31


MIRROR LIGHT LED SMD Internal driver
Aluminium PC



ML31-600-10W



ML31-900-15W



Beam Angle

110°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification


SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
ML31-600-10W	AC100-240V	10W	1340lm	II
ML31-900-15W	AC100-240V	15W	2140lm	II




ML33


MIRROR LIGHT LED SMD Internal driver
Aluminium PC



ML33-450-6W



ML33-600-10W
ML33-600-12W



ML33-900-12W
ML33-900-15W



Beam Angle

110°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
ML33-450-6W	AC220-240V	6W	600lm	I
ML33-600-10W	AC220-240V	10W	930lm	I
ML33-600-12W	AC220-240V	12W	1100lm	I
ML33-900-12W	AC220-240V	12W	1100lm	I
ML33-900-15W	AC220-240V	15W	1360lm	I




ML36

MIRROR LIGHT

LED SMD Internal driver
Aluminium PC



ML36-450-8W



ML36-600-10W
ML36-600-12W

Beam Angle



Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE


Code	Voltage	Watt	Lumen(±5%)	Class
ML36-450-8W	AC220-240V	8W	960lm	I
ML36-600-10W	AC220-240V	10W	1200lm	I
ML36-600-12W	AC220-240V	12W	1450lm	I
ML36-900-12W	AC220-240V	12W	1450lm	I
ML36-900-15W	AC220-240V	15W	1720lm	I




ML39

MIRROR LIGHT

LED SMD Internal driver
Aluminium PC



ML39-450-6W



ML39-600-10W
ML39-600-15W

Beam Angle



Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE


Code	Voltage	Watt	Lumen(±5%)	Class
ML39-450-6W	AC220-240V	6W	610lm	I
ML39-600-10W	AC220-240V	10W	950lm	I
ML39-600-15W	AC220-240V	15W	1450lm	I
ML39-900-10W	AC220-240V	10W	950lm	I
ML39-900-15W	AC220-240V	15W	1450lm	I




ML29

MIRROR LIGHT


LED SMD Internal driver
Aluminium PC



ML29-450-6W



ML29-580-10W



ML29-860-15W



Beam Angle

110°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
ML29-450-6W	AC220-240V	6W	720lm	I
ML29-580-10W	AC220-240V	10W	1200lm	I
ML29-860-15W	AC220-240V	15W	1850lm	I







ML43

MIRROR LIGHT

LED SMD Internal driver
PCPC



ML43A-8W



ML43B-6W



Beam Angle

360°

Light Source

CRI≥90 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE


Code	Voltage	Watt	Lumen(±5%)	Class
ML43A-8W	AC220-240V	8W	670lm	II
ML43B-6W	AC220-240V	6W	490lm	II




ML42

MIRROR LIGHT

LED COB Internal driver
Aluminium PC



ML42-70-8W-D



Beam Angle

40°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification


SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
ML42-70-8W-D	AC220-240V	8W	480lm	I

ML40

MIRROR LIGHT

LED COB Internal driver
Iron PMMA



ML40-330-5W



WH

Beam Angle

150°

Light Source

CRI≥90 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Touch Flicker Free PF≥0.9



Certification


SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
ML40-330-5W	AC220-240V	5W	470lm	I


ML30

MIRROR LIGHT


LED SMD Internal driver
Aluminium PC



ML30-460-6W



ML30-580-10W

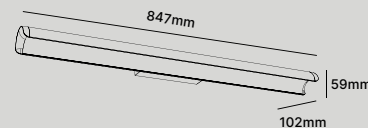

ML30-850-15W



WH CH

Beam Angle

110°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF Flicker Free PF≥0.9




Certification

SAA RoHS CE


Code	Voltage	Watt	Lumen(±5%)	Class
ML30-460-6W	AC220-240V	6W	610lm	I
ML30-580-10W	AC220-240V	10W	1000lm	I
ML30-850-15W	AC220-240V	15W	1410lm	I

ML18

MIRROR LIGHT LED SMD Internal driver
Aluminium+PC PC



ML18-580-10W



ML18-860-15W

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



PF≥0.9




Certification

SAA RoHS CE



Code	Voltage	Watt	Lumen(±5%)	Class
ML18-580-10W	AC100-240V	10W	1150lm	I
ML18-860-15W	AC100-240V	15W	1950lm	I
ML18-1140-20W	AC100-240V	20W	2430lm	I

ML01

MIRROR LIGHT LED SMDInternal driver
Die-casting AluminiumPC



ML01-580-10W



ML01-860-15W

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



PF≥0.9



Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
ML01-580-10W	AC100-240V	10W	1180lm	I
ML01-860-15W	AC100-240V	15W	1950lm	I
ML01-1140-20W	AC100-240V	20W	2430lm	I

Contact details

IINNO Ltd

Unit 7, 8/F., Tower B,
83 King Lam Street,
Lai Chi Kok, Kowloon,
Hong Kong

Tel: +852 2134 9906

+86 (0)769 23010151/2

M: +86 13922905402

Email: sales@iinno-lighting.com

www.iinno-lighting.com

