





Commercial Exterior Residential Lighting

iinno Lighting delivers certified, high-performance solutions for commercial, municipal, and industrial use, trusted by developers worldwide for quality, scale, and long-term reliability.

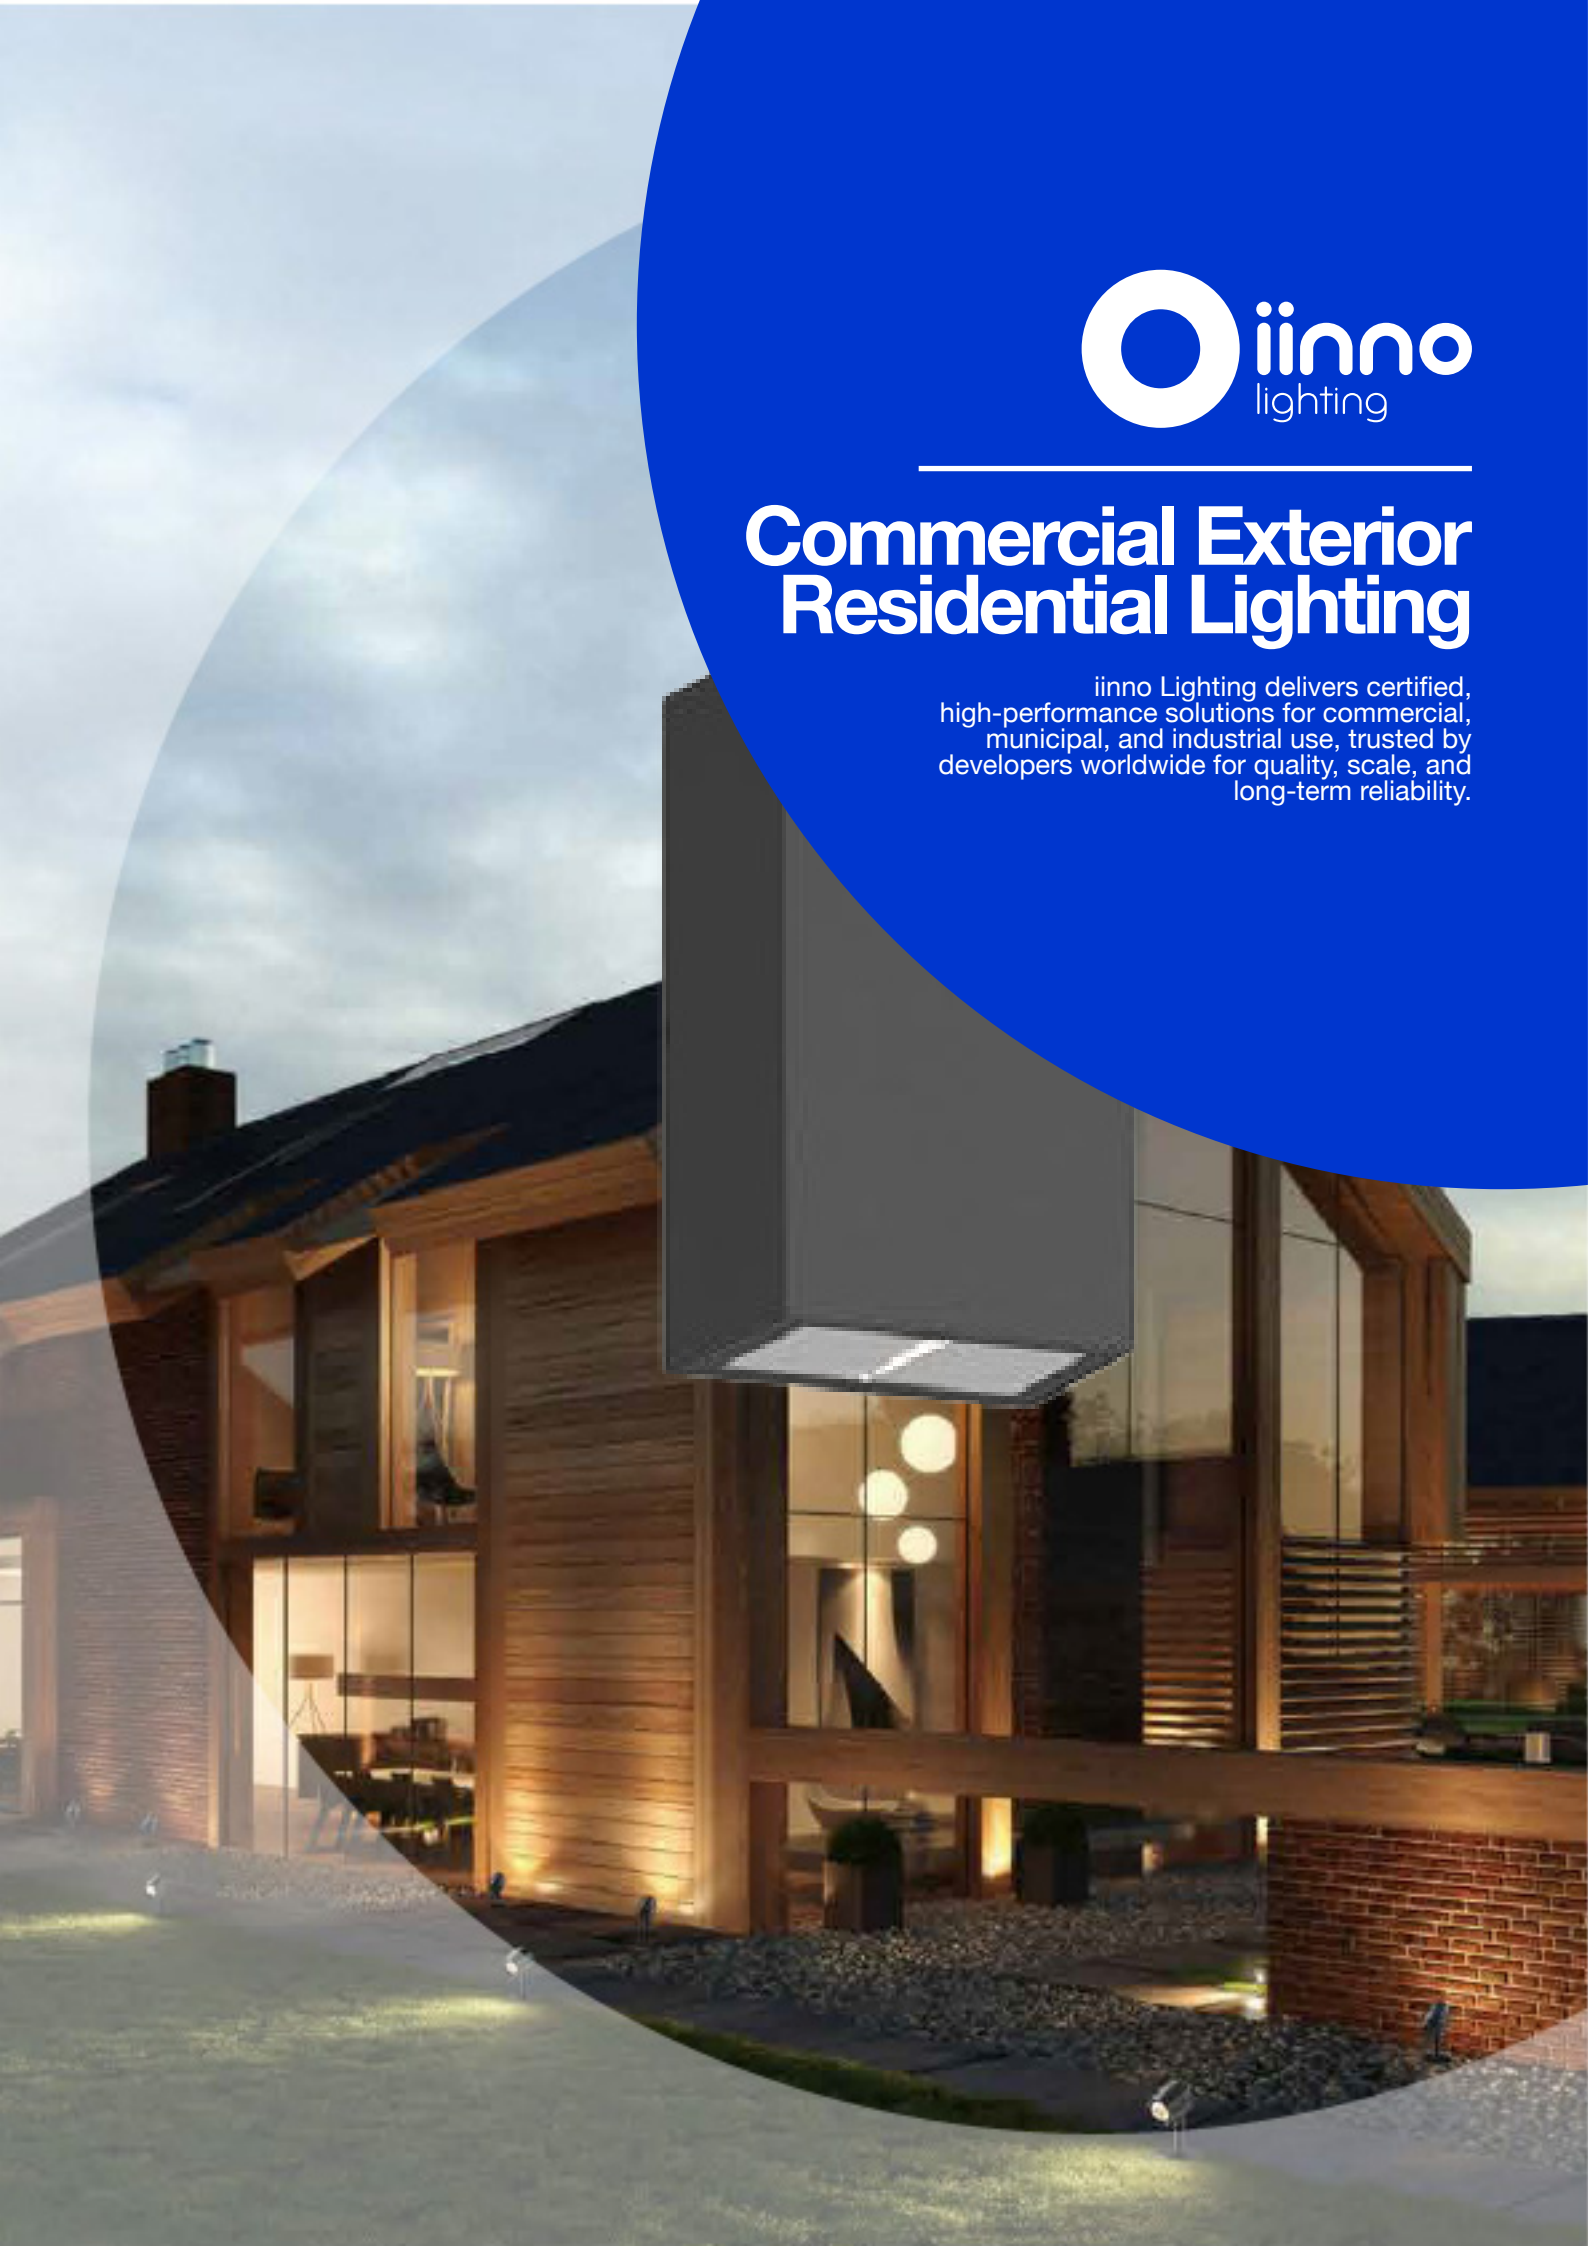

WL28

WALL LIGHT | LED COBI | Internal driver
Die-casting Aluminium | PC

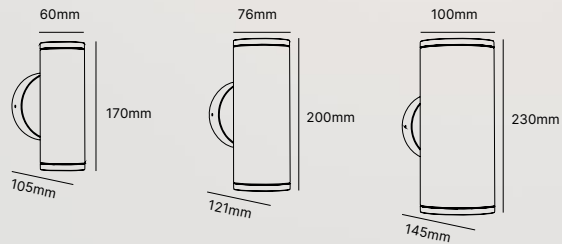

WL28-10W

WL28-20W

WL28-27W



Beam Angle

∠15° ∠24° ∠36° ∠60°

Light Source

CRI≥80

2700K 3000K 4000K

Gear




Code	Voltage	Watt	Lumen(±5%)	Class
WL28-10W	AC100-240V	2×5W	900lm	I
WL28-20W	AC100-240V	2×10W	2200lm	I
WL28-27W	AC100-240V	2×13.5W	3200lm	I

Certification

SAA RoHS CE

WL28B/C

WALL LIGHT | LED SMD | Internal driver
Die-casting Aluminium | PC

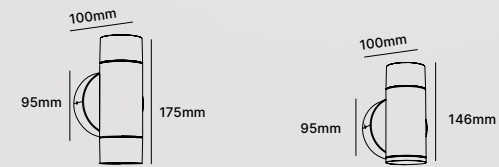


WL28B-60-8W

WL28C-60-5W



WL28B-76-8W
WL28B-76-15W

WL28C-76-8W



Beam Angle

∠170° ∠360°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear




Code	Voltage	Watt	Lumen(±5%)	Class
WL28B-60-8W	AC220-240V	2×4W	600lm	I
WL28B-76-8W	AC220-240V	2×4W	700lm	I
WL28B-76-15W	AC220-240V	2×7.5W	1150lm	I
WL28C-60-5W	AC220-240V	5W	380lm	I
WL28C-76-8W	AC220-240V	8W	700lm	I

Certification

SAA RoHS CE

WL85

WALL LIGHT | LED SMD Internal driver
Die-casting Aluminium PC

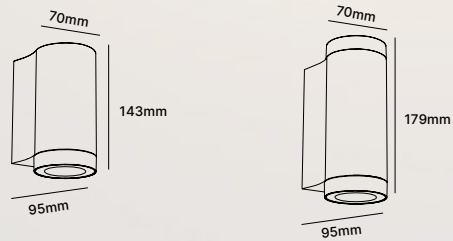

WL85-8W

WL85-15W

Code	Voltage	Watt	Lumen(±5%)	Class
WL85-8W	AC200-240V	8W	850lm	I
WL85-15W	AC200-240V	2×7.5W	1700lm	I



Beam Angle

∠45°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear




Certification

SAA RoHS CE

WL149


WALL LIGHT | LED COB Internal driver
Die-casting Aluminium PC

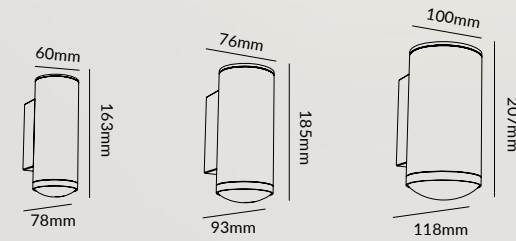

WL149-60-5W

WL149-76-10W

WL149-100-15W

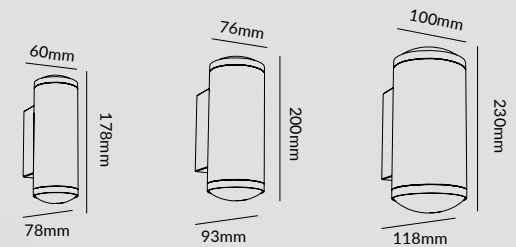


WL149-60-2x4W

WL149-76-2x9W

WL149-100-2x12.5W

Code	Voltage	Watt	Lumen(±5%)	Class
WL149-60-5W	AC220-240V	5W	680lm	I
WL149-76-10W	AC220-240V	10W	1400lm	I
WL149-100-15W	AC220-240V	15W	2100lm	I
WL149-60-2×4W	AC220-240V	8W	1010lm	I
WL149-76-2×9W	AC220-240V	18W	2700lm	I
WL149-100-2×12.5W	AC220-240V	25W	3100lm	I



Beam Angle


∠100° ∠360°

Light Source

CRI≥80 CRI≥90 SDCM<6

2700K 3000K 4000K

Gear

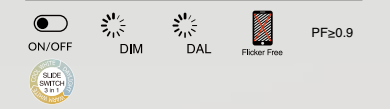


Certification


SAA RoHS CE

WL73

WALL LIGHT | LED COB/ GU10 | Internal driver
Die-casting Aluminium | PC



WL73A-4.9W
WL73A-8W
WL73A-10W
WL73A-16W



WL73B-4.9W
WL73B-8W
WL73B-10W
WL73B-16W



Beam Angle

∠100°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE

Accessories




GU10 socket parameter

	Input Voltage	AC100-240V
	Max Input Current	2A
	Max Watt	16W
	Max Dimension(AxBmm)	Ø50x60

Code	Voltage	Watt	Lumen(±5%)	Class
WL73A-4.9W	AC220-240V	4.9W	450lm	I
WL73A-8W	AC220-240V	8W	750lm	I
WL73A-10W	AC220-240V	10W	1000lm	I
WL73A-16W	AC220-240V	16W	1600lm	I
WL73B-4.9W	AC220-240V	4.9W	450lm	I
WL73B-8W	AC220-240V	8W	750lm	I
WL73B-10W	AC220-240V	10W	1000lm	I
WL73B-16W	AC220-240V	16W	1600lm	I


WL73A

4 Decorative patterns

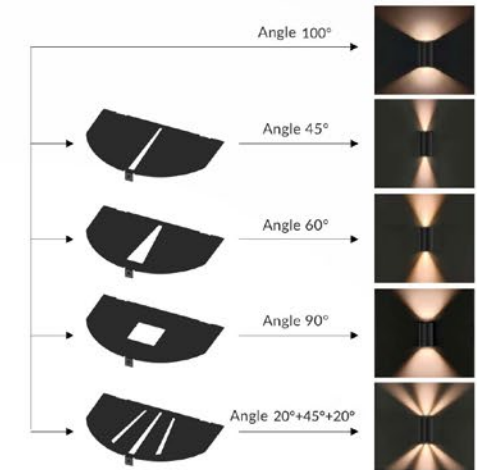

WL73B

4 Decorative patterns

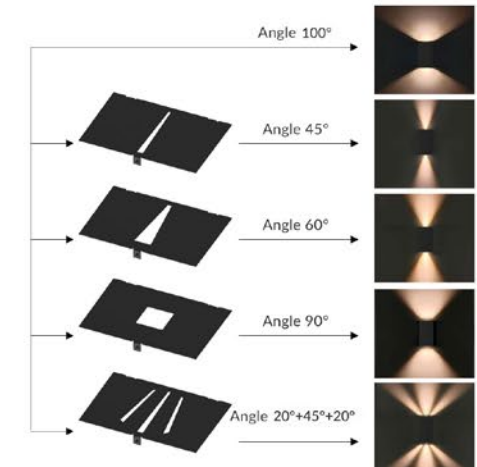

WL73-GU10

GU10 Replaceable light source wall washer



WL73A-GU10


WL73B-GU10

GU10



WL07C

WALL LIGHT | LED SMD | Internal driver
Die-casting Aluminium | PC



WL07C



Beam Angle

140°

Light Source

CRI≥80	SDCM<6
2700K	3000K 4000K


Gear



Certification




Code	Voltage	Watt	Lumen(±5%)	Class
WL07C	AC200-240V	8W	655lm	I

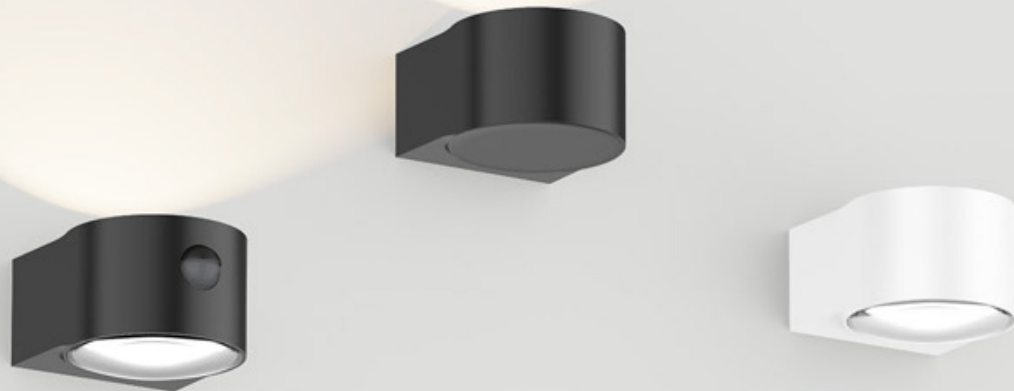

WL387

WALL LIGHT | LED COB | Internal driver
Die-casting Aluminium | PC



WL387-8W-D
WL387-10W
WL387-8W-D



Beam Angle

110°


Light Source

CRI≥80	CRI=90	SDCM<6
2700K	3000K	4000K

Gear



Certification



Code	Voltage	Watt	Lumen(±5%)	Class
WL387-8W-D	AC220-240V	2×4W	940lm	I
WL387-10W	AC220-240V	2×5W	1150lm	I
WL387-8W-D	AC220-240V	1×8W	890lm	I



DL387 P099



DL387B P052




WL387




WL20

WALL LIGHT | LED SMD | Internal driver
Die-casting Aluminium/ PC | PC



WL20-10W
WL20B-10W

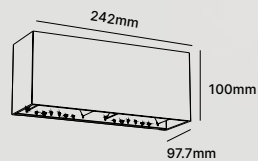

WL20-18W
WL20B-18W

Beam Angle

15°~120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear




Certification

SAA RoHS CE


Code	Voltage	Watt	Lumen(±5%)	Class
WL20-10W	AC100-240V	10W	900lm	I
WL20-18W	AC220-240V	18W	1350lm	I
WL20B-10W	AC100-240V	10W	900lm	I
WL20B-18W	AC220-240V	18W	1350lm	I



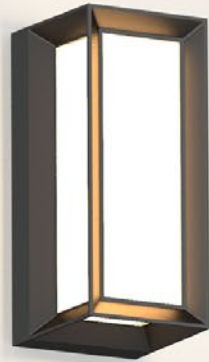

WL153

WALL LIGHT | LED SMD | Internal driver
Die-casting Aluminium | PC

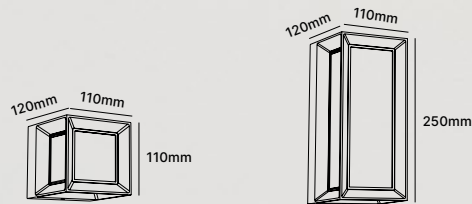

WL153-8W-D

WL153-15W-D



Beam Angle


∠200°

Light Source

CRI ≥ 80 SDCM < 6

2700K 3000K 4000K

Gear




Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
WL153-8W-D	AC220-240V	8W	750lm	I
WL153-15W-D	AC220-240V	15W	1490lm	I

WL130

WALL LIGHT | LED COB | Internal driver
Die-casting Aluminium | PC



WL130-3W-D
WL130-6W-D
WL130-8W-D



Beam Angle

∠90°

Light Source

CRI ≥ 80 SDCM < 6

2700K 3000K 4000K


Gear



Certification


SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
WL130-3W-D	AC220-240V	3W	450lm	I
WL130-6W-D	AC220-240V	6W	870lm	I
WL130-8W-D	AC220-240V	8W	1150lm	I

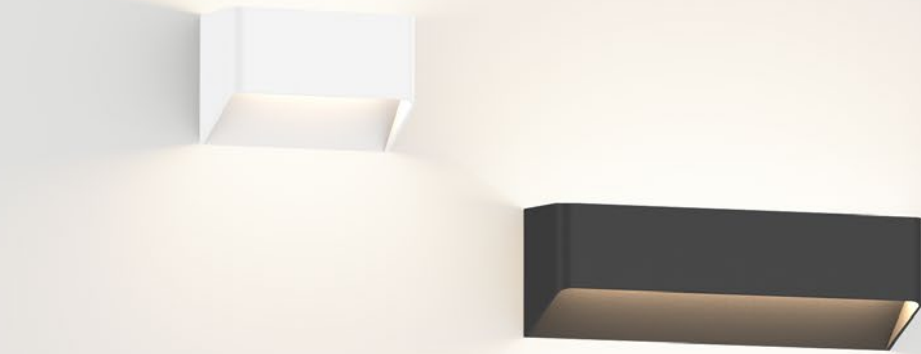

WL16

WALL LIGHT | LED SMD | Internal driver
Die-casting Aluminium | PC



WL16-1510-10W



WL16-3010-18W
WL16-3010-18W
(Switchable)



Beam Angle


★100°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification


SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
WL16-1510-10W	AC220-240V	2×5W	500lm	I
WL16-3010-18W	AC220-240V	2×9W	900lm	I
WL16-3010-18W (Switchable)	AC220-240V	18W	1200lm	I



WL112

WALL LIGHT | LED SMD | Internal driver
Die-casting Aluminium | PC



WL112-6W



Beam Angle

★30°x20°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K


Gear




Certification

SAA RoHS CE


Code	Voltage	Watt	Lumen(±5%)	Class
WL112-6W	AC220-240V	6W	350lm	I

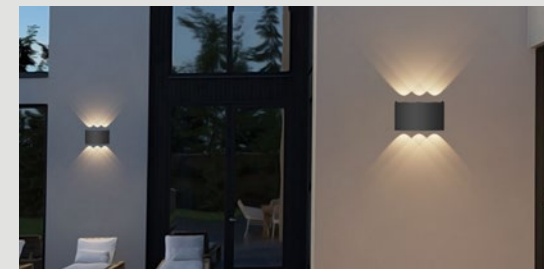

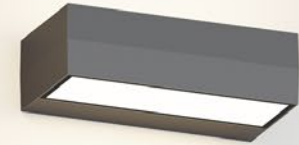


WL75


WALL LIGHT | LED SMD Internal driver
Die-casting Aluminium PC




WL75-6W



WL75B-6W



WL75-10W



WL75B-10W



Beam Angle

∠120° ∠29°x77°x8°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear




Certification

SAA RoHS CE


Code	Voltage	Watt	Lumen(±5%)	Class
WL75-6W	AC220-240V	2×3W	680lm	I
WL75B-6W	AC220-240V	2×3W	530lm	I
WL75-10W	AC220-240V	2×5W	1060lm	I
WL75B-10W	AC220-240V	2×5W	840lm	I

WL88


WALL LIGHT | LED SMD Internal driver
Die-casting Aluminium PC/ Glass



WL88-10W
WL88-10W-P3
(Switchable)

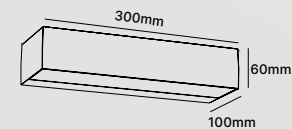

WL88-15W



Beam Angle

∠60°x115°x40° ∠90°x110°x40°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification


SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
WL88-10W	AC220-240V	10W	750lm	I
WL88-15W	AC220-240V	15W	1100lm	I
WL88-10W-P3 (Switchable)	AC220-240V	10W	700lm	I



WL57

WALL LIGHT | LED SMD | Internal driver
Die-casting Aluminium | PC

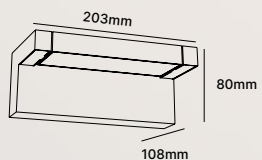

WL57A-10W
WL57A-18W
WL57B-10W
WL57B-18W



Beam Angle

90°

Light Source

CRI ≥ 80 SDCM < 6

2700K 3000K 4000K

Gear




Certification

SAA RoHS CE


Code	Voltage	Watt	Lumen(±5%)	Class
WL57A-10W	AC200-240V	10W	1150lm	I
WL57A-18W	AC200-240V	18W	1300lm	I
WL57B-10W	AC200-240V	10W	1900lm	I
WL57B-18W	AC200-240V	18W	2100lm	I

WL08

WALL LIGHT | LED SMD | Internal driver
Die-casting Aluminium | PC



WL08-8W



Beam Angle

120°

Light Source

CRI ≥ 80 SDCM < 6

2700K 3000K 4000K

Gear




Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
WL08-8W	AC100-240V	8W	670lm	I

WL110

WALL LIGHT | LED COBI | Internal driver
Die-casting Aluminium/PC/ Glass



WL110-6W



Beam Angle

★120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear




Certification

SAA RoHS CE



WL91

WALL LIGHT | LED SMD/ GU10 | Internal driver
Die-casting Aluminium/PC

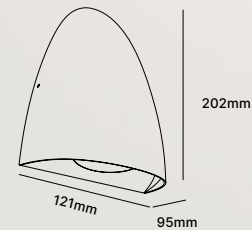

WL91-8W



Beam Angle

★45°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE

GU10 socket parameter


	Input Voltage	AC100-240V
	Max Input Current	2A
	Max Watt	8W
	Max Dimension(AxBmm)	Ø50x58
	Lamp holder	GU10
	Lamp holder material	ceramics



WL108

WALL LIGHT

LED SMD | Internal driver
Die-casting Aluminium PC

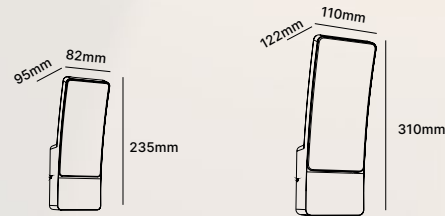

WL108-10W

WL108-20W

Code	Voltage	Watt	Lumen(±5%)	Class
WL108-10W	AC200-240V	10W	1050lm	I
WL108-20W	AC200-240V	20W	2150lm	I

Beam Angle


★120°

Light Source

CRI≥80 SDCM<6


2700K 3000K 4000K

Gear



Certification


SAA RoHS CE

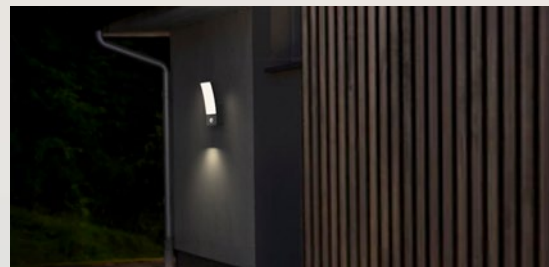


WL90A/B

WALL LIGHT

LED SMD | Internal driver
Die-casting Aluminium PC



WL90A-8W



WL90B-8W



Beam Angle

★320° ★360°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE

Accessories

- ACC-WL90-BK
- ACC-WL/NL90B-BK-8W-D
ACC-WL/NL90B-BK-8W-P2
- ACC-WL/NL90A-BK-8W-D
ACC-WL/NL90A-BK-8W-P2




WL90A/B




NL90A/B
P316

Code	Voltage	Watt	Lumen(±5%)	Class
WL90A-8W	AC220-240V	8W	700lm	I
WL90B-8W	AC220-240V	8W	600lm	I

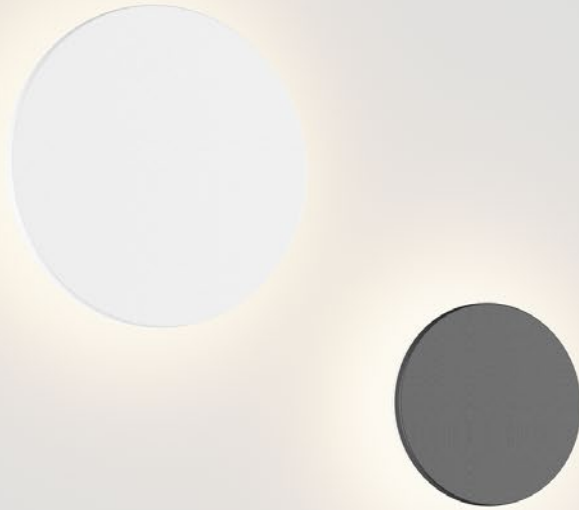


WL105

WALL LIGHT | LED SMD Internal driver
Die-casting Aluminium/PC



WL105-8W



WL105-15W

Beam Angle



Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification


SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
WL105-8W	AC220-240V	8W	640lm	I
WL105-15W	AC220-240V	15W	1260lm	I



WL52

WALL LIGHT | LED COB Internal driver
Die-casting Aluminium/Aluminium/PC



WL52-10W
WL52-10W-C3



Beam Angle



Light Source

CRI≥80 CRI≥90 SDCM<6

2700K 3000K 4000K


Gear




Certification

SAA RoHS CE

Accessories

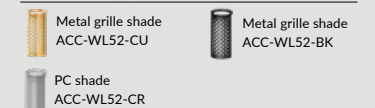


Code	Voltage	Watt	Lumen(±5%)	Class
WL52-10W	AC220-240V	10W	550lm	I
WL52-10W-C3	AC220-240V	10W	400lm	I

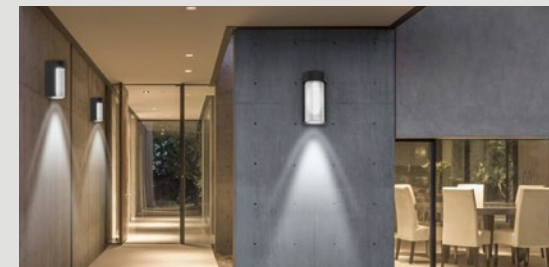



WL06A

WALL LIGHT | LED SMD | Internal driver
Die-casting AluminiumPC



WL06A-12W



Beam Angle

★120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear




Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
WL06A-12W	AC100-240V	12W	1050lm	I

WL06B

WALL LIGHT | LED SMD Internal driver
Die-casting AluminiumPC



WL06B-12W



Beam Angle

★60°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification


SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
WL06B-12W	AC100-240V	12W	1100lm	I



WL80

WALL LIGHT | LED SMD Internal driver
Die-casting Aluminium PC



- WL80A-12W
- WL80A-18W
- WL80B-12W
- WL80B-18W



Beam Angle

∠120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear





Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
WL80A-12W	AC220-240V	12W	1400lm	I
WL80A-18W	AC220-240V	18W	1900lm	I
WL80B-12W	AC220-240V	12W	1400lm	I
WL80B-18W	AC220-240V	18W	1900lm	I


WL76

WALL LIGHT | LED SMD Internal driver
Die-casting Aluminium PC



- WL76-7W
- WL76-7W-C3

- WL76-14W
- WL76-14W-C3



Beam Angle

∠120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K


Gear



Certification


SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
WL76-7W	AC220-240V	7W	750lm	I
WL76-7W-C3	AC220-240V	7W	760lm	I
WL76-14W	AC220-240V	2×7W	1420lm	I
WL76-14W-C3	AC220-240V	2×7W	1430lm	I

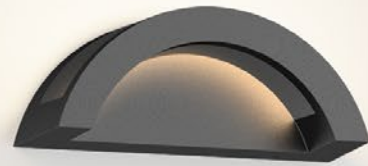

WL46

WALL LIGHT | LED SMD | Internal driver
Aluminium | PC



WL46-10W



Beam Angle

50°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF PF≥0.9

Certification

SAA RoHS CE


Code	Voltage	Watt	Lumen(±5%)	Class
WL46-10W	AC200-240V	10W	530lm	I







WL59A

WALL LIGHT | LED SMD | Internal driver
Die-casting Aluminium | Glass



WL59A-5W



WL59A-8W

Beam Angle

60° 70°

Light Source

CRI ≥ 80 SDCM < 6

2700K 3000K 4000K

Gear



Certification


SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
WL59A-5W	AC/DC12V	5W	200lm	III
WL59A-8W	AC/DC12V	8W	340lm	III
WL59A-5W	AC220-240V	5W	170lm	I
WL59A-8W	AC220-240V	8W	320lm	I




WL59B/C


WALL LIGHT | LED SMD | Internal driver
Die-casting Aluminium | Glass




WL59B-5W



WL59B-8W



WL59C-5W

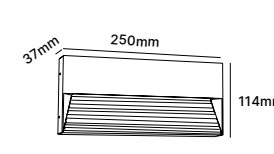

WL59C-10W

Beam Angle

60° 70°

Light Source

CRI ≥ 80 SDCM < 6

2700K 3000K 4000K


Gear



Certification


SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
WL59B-5W	AC/DC12V	5W	200lm	III
WL59B-8W	AC/DC12V	8W	340lm	III
WL59B-5W	AC220-240V	5W	170lm	I
WL59B-8W	AC220-240V	8W	320lm	I
WL59C-5W	AC/DC12V	5W	200lm	III
WL59C-10W	AC/DC12V	10W	420lm	III
WL59C-5W	AC220-240V	5W	170lm	I
WL59C-10W	AC220-240V	10W	450lm	I

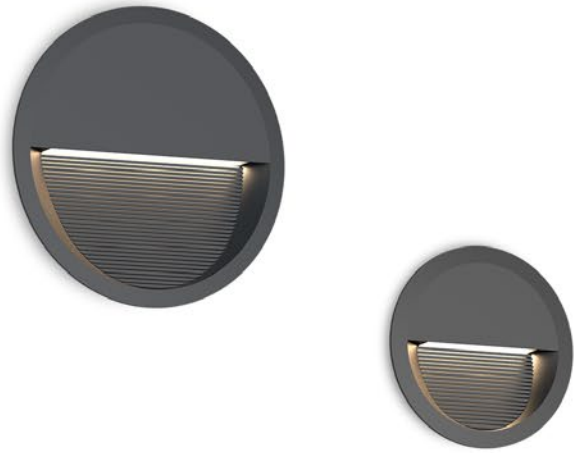


WL60A

WALL LIGHT | LED SMD | Internal driver
Die-casting Aluminium | Glass





WL60A-5W
Ø130×78mm



WL60A-8W
Ø196×78mm

Code	Voltage	Watt	Lumen(±5%)	Class
WL60A-5W	AC/DC12V	5W	200lm	III
WL60A-8W	AC/DC12V	8W	340lm	III
WL60A-5W	AC220-240V	5W	170lm	I
WL60A-8W	AC220-240V	8W	320lm	I

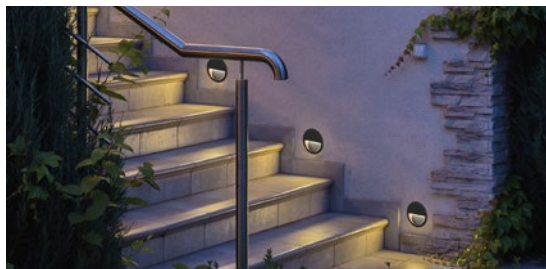

Beam Angle

∠60° ∠70°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear




Certification

SAA RoHS CE




WL60B/C


WALL LIGHT | LED SMD | Internal driver
Die-casting Aluminium | Glass




WL60B-5W
130x130x78mm

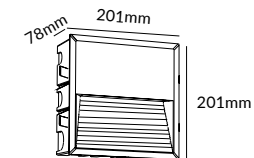

WL60B-8W
195x195x78mm



WL60C-5W
130x196x78mm

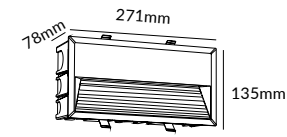

WL60C-10W
266x130x78mm



Beam Angle

∠60° ∠70°

Light Source

CRI≥80 SDCM<6


2700K 3000K 4000K

Gear




Certification

SAA RoHS CE

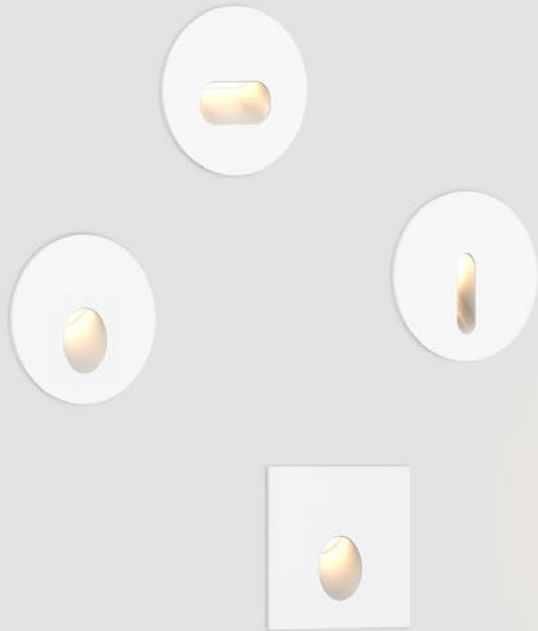


WL142


WALL LIGHT | LED SMD | Internal driver
Aluminium | PC/ Glass



WL142A-2W
WL142B-2W
WL142C-2W
Ø44×65mm



WL142D-2W
Ø44×65mm



WL142E-2W
Ø44×65mm

Code	Voltage	Watt	Lumen(±5%)	Class
WL142A-2W	DC24V	2W	70lm	III
WL142B-2W	DC24V	2W	65lm	III
WL142C-2W	DC24V	2W	30lm	III
WL142D-2W	DC24V	2W	50lm	III
WL142E-2W	DC24V	2W	70lm	III



Beam Angle

★30° ★40° ★180°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear




Certification

SAA RoHS CE


Accessories



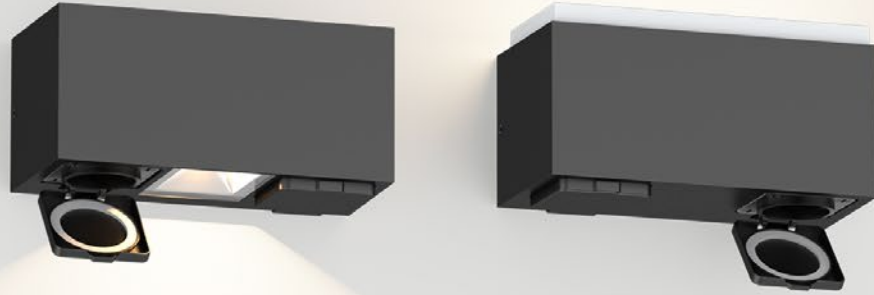


WL116

WALL LIGHT | LED SMD | Internal driver
Aluminium | PC/ Glass



WL116A-10W



WL116B-10W



Beam Angle

∠100° ∠120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification


SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
WL116A-10W	AC220-240V	10W	1200lm	I
WL116B-10W	AC220-240V	10W	980lm	I



WL92

WALL LIGHT | LED SMD | Internal driver
Aluminium+PC | PC

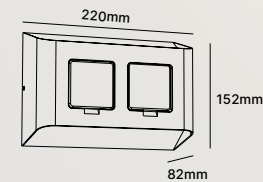

WL92-10W



Beam Angle

∠100°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K


Gear



Certification

SAA RoHS CE


Code	Voltage	Watt	Lumen(±5%)	Class
WL92-10W	AC220-240V	2×5W	620lm	I
WL92-10W	AC220-240V	10W	620lm	I

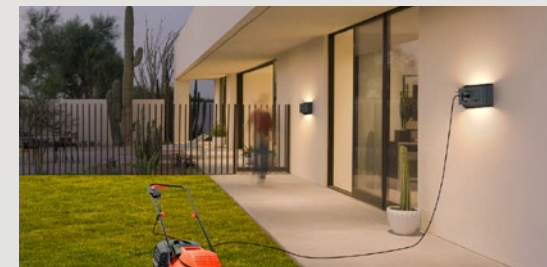



WL125

WALL LIGHT | LED COB | Internal driver
Die-casting Aluminium | PC



WL125-8W-D
WL125-15W-D



Beam Angle

★ 15°~120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE


Code	Voltage	Watt	Lumen(±5%)	Class
WL125-8W-D	AC220-240V	2×4W	560lm	I
WL125-15W-D	AC220-240V	2×7.5W	950lm	I





WL96

WALL LIGHT | LED COB | Internal driver
Aluminium & PC | PC



- WL96-12W-C3
- WL96-12W-S1C3
- WL96-24W-C3
- WL96-24W-S1C3



Beam Angle


★100°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification


SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
WL96-12W-C3	AC220-240V	12W	1200lm	I
WL96-12W-S1C3	AC220-240V	12W	1200lm	I
WL96-24W-C3	AC220-240V	2×12W	2400lm	I
WL96-24W-S1C3	AC220-240V	2×12W	2400lm	I




WL62

WALL LIGHT | LED COB | Internal driver
Aluminium | Aluminium

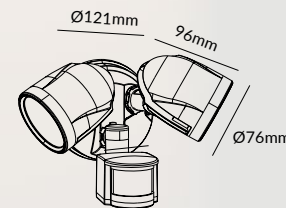

- WL62-11W
- WL62-12W-S
- WL62-23W
- WL62-24W-S



Beam Angle


★90°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
WL62-11W	AC200-240V	11W	1250lm	I
WL62-12W-S	AC200-240V	12W	1250lm	I
WL62-23W	AC200-240V	2×11.5W	2350lm	I
WL62-24W-S	AC200-240V	2×12W	2350lm	I




WL154

WALL LIGHT | LED COB | Internal driver
Aluminium | PMMA



WL154-8W

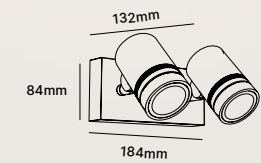

WL154-16W



Beam Angle

★36° ★60°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification


SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
WL154-8W	AC220-240V	8W	1050lm	I
WL154-16W	AC220-240V	16W	1990lm	I



SOL01

SOLAR WALL LIGHT | LED SMO | Internal driver
PCPC

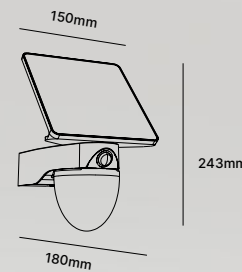

SOL01-1.2W



Beam Angle

★200°

Light Source

CRI=80 SDCM<6

2700K 3000K 4000K

Gear




Certification


SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
SOL01-1.2W	DC3V	1.2W	110lm	/


NL154A/B




NL154A-8W
DC-NL154A-8W
(Surface)



NL154B-8W
DC-NL154B-8W
(Surface)



NL154A-8W
DC-NL154A-8W
(Spike)



NL154B-8W
DC-NL154B-8W
(Spike)

Code	Voltage	Watt	Lumen(±5%)	Class
NL154A-8W(Spike)	AC220-240V	8W	690lm	I
NL154A-8W(Surface)	AC220-240V	8W	690lm	I
NL154B-8W(Spike)	AC220-240V	8W	640lm	I
NL154B-8W(Surface)	AC220-240V	8W	640lm	I
DC-NL154A-8W(Spike)	DC24V	8W	690lm	III
DC-NL154A-8W(Surface)	DC24V	8W	690lm	III
DC-NL154B-8W(Spike)	DC24V	8W	640lm	III
DC-NL154B-8W(Surface)	DC24V	8W	640lm	III

SPIKE LIGHT | LED COB | Internal driver
Aluminium | PMMA



Beam Angle



Light Source

CRI≥80 SDCM<6

2700K	3000K	4000K
-------	-------	-------


Gear




Certification




NL154C

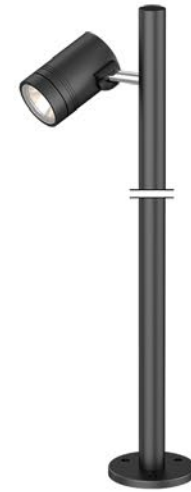

SPIKE LIGHT | LED COB | Internal driver
Aluminium | PMMA

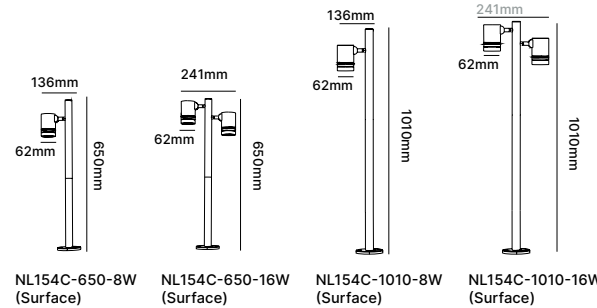

NL154C-650-8W (Surface) NL154C-650-16W (Surface) NL154C-1010-8W (Surface) NL154C-1010-16W (Surface)

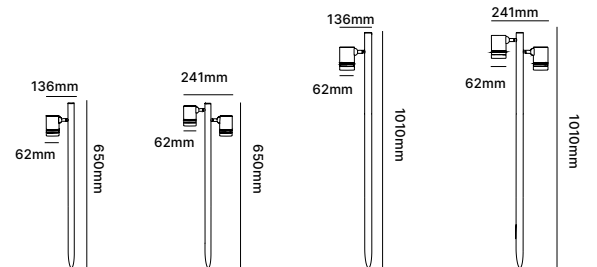

NL154C-650-8W (Spike) NL154C-650-16W (Spike) NL154C-1010-8W (Spike) NL154C-1010-16W (Spike)

Code	Voltage	Watt	Lumen(±5%)	Class
NL154C-650-8W(Surface)	AC200-240V	8W	1030lm	I
NL154C-650-16W(Surface)	AC200-240V	16W	1990lm	I
NL154C-1010-8W(Surface)	AC200-240V	8W	1030lm	I
NL154C-1010-16W(Surface)	AC200-240V	16W	1990lm	I
NL154C-650-8W(Spike)	AC200-240V	8W	1030lm	I
NL154C-650-16W(Spike)	AC200-240V	16W	1990lm	I
NL154C-1010-8W(Spike)	AC200-240V	8W	1030lm	I
NL154C-1010-16W(Spike)	AC200-240V	16W	1990lm	I

Beam Angle



Light Source

CRI≥80 SDCM<6

2700K	3000K	4000K
-------	-------	-------

Gear




Certification






ML06

SPIKE LIGHT | LED SMD | Internal driver
Aluminium | PC

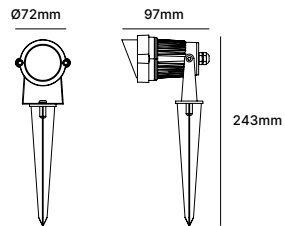

ML06-6W



BK

Beam Angle

★60°

Light Source

CRI≥80 SDCM<6


2700K 3000K 4000K

Gear

ON/OFF  PF≥0.1


Certification

SAA RoHS CE

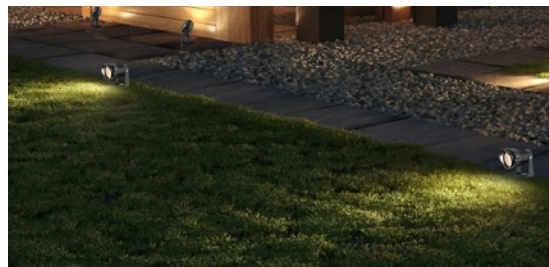


ML07

SPIKE LIGHT | LED SMD | Internal driver
Aluminium | PMMA



ML07-6W
ML07-10W



BK

Beam Angle

★36° ★60°

Light Source

CRI≥80 SDCM<6


2700K 3000K 4000K

Gear

ON/OFF  PF≥0.9

Certification

SAA RoHS CE

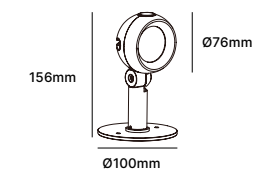


ML07B-6W
ML07B-10W

Code	Voltage	Watt	Lumen(±5%)	Class
ML07-6W	AC/DC12V	6W	550lm	III
ML07-10W	AC/DC12V	10W	950lm	III
ML07B-6W	AC/DC12V	6W	550lm	III
ML07B-10W	AC/DC12V	10W	950lm	III




NL14


SPIKE LIGHT | LED COB | Internal driver
Aluminium | Aluminium




NL14A-8W
NL14C-8W




NL14B-8W
NL14D-8W




NL14E-8W
NL14G-8W



NL14F-8W
NL14H-8W




DC-NL14-8W
(Spike)



DC-NL14-8W
(Surface)

Code	Voltage	Watt	Lumen(±5%)	Class
NL14A-8W	AC220-240V	8W	910lm	I
NL14B-8W	AC220-240V	8W	910lm	I
NL14C-8W	DC12V	8W	850lm	III
NL14D-8W	DC12V	8W	850lm	III
NL14E-8W	AC220-240V	8W	910lm	I
NL14F-8W	AC220-240V	8W	910lm	I
NL14G-8W	DC12V	8W	850lm	III
NL14H-8W	DC12V	8W	850lm	III
DC-NL14-8W(Surface)	DC24V	8W	950lm	III
DC-NL14-8W(Spike)	DC24V	8W	950lm	III



BK

Beam Angle

★15° ★24° ★45° ★50°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear


ON/OFF PF≥0.9
Flicker Free

Certification


SAA RoHS CE

NL06


SPIKE LIGHT | LED SMD | Internal driver
Aluminium | PC



NL06-6W
NL06-8W



NL06-6W
NL06-8W



BK

Beam Angle

★45° ★60°

Light Source

CRI=80 SDCM<6


2700K 3000K 4000K

Gear

ON/OFF PF≥0.9
Flicker Free

Certification


SAA RoHS CE

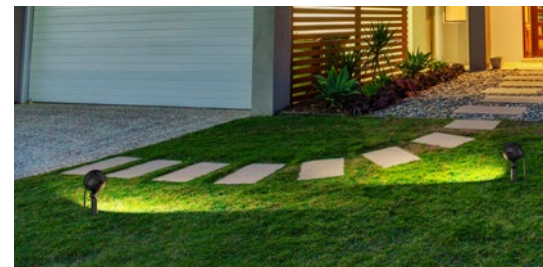



NL18

SPIKE LIGHT | LED SMD | Internal driver
Aluminium | PC

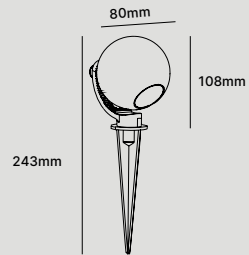

DC-NL18-5W



Beam Angle

★24° ★36° ★50° ★60°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification


SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
DC-NL18-5W	DC24V	5W	550lm	III



NL16

SPIKE LIGHT | LED SMD | Internal driver
Aluminium | PC

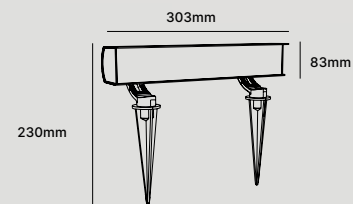

DC-NL16-8W
DC-NL16-12W



Beam Angle

★60°x100°

Light Source

CRI=80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
DC-NL16-8W	DC24V	8W	1000lm	III
DC-NL16-12W	DC24V	12W	1500lm	III




NL08


BOLLARD | LED SMD | Internal driver
Aluminium | PC




ML08-300-8W



ML08-500-8W



ML08-700-8W

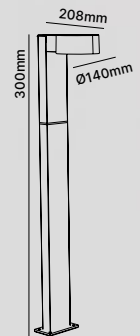

ML08-1000-8W

Code	Voltage	Watt	Lumen(±5%)	Class
ML08-300-8W	AC100-240V	8W	655lm	I
ML08-500-8W	AC100-240V	8W	655lm	I
ML08-700-8W	AC100-240V	8W	655lm	I
ML08-1000-8W	AC100-240V	8W	655lm	I



Beam Angle

∠120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification


SAA RoHS CE





NL90A/B

BOLLARD | LED SMD | Internal driver
Aluminium/ PC | PC

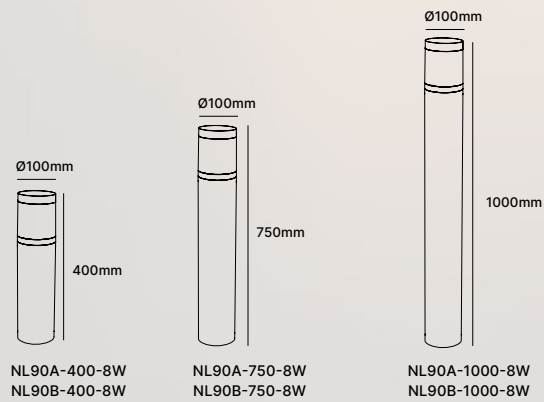

NL90A-400-8W
NL90B-400-8W

NL90A-750-8W
NL90B-750-8W

NL90A-1000-8W
NL90B-1000-8W

Code	Voltage	Watt	Lumen(±5%)	Class
NL90A-400-8W	AC220-240V	8W	700lm	I
NL90A-750-8W	AC220-240V	8W	700lm	I
NL90A-1000-8W	AC220-240V	8W	700lm	I
NL90B-400-8W	AC220-240V	8W	600lm	I
NL90B-750-8W	AC220-240V	8W	600lm	I
NL90B-1000-8W	AC220-240V	8W	600lm	I



WL90A/B
P283

NL90A/B



Beam Angle

★320° ★360°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE

Accessories




ACC-NL90-400/750/1000-BK




NL08

BOLLARD | LED SMD | Internal driver
Aluminium | PC

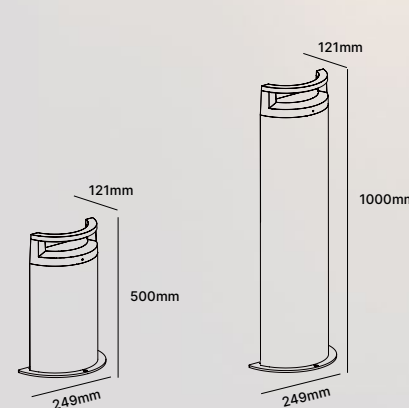

NL08A-10W

NL08B-10W



Beam Angle

★50°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE

Accessories



ACC-NL08A-00

ACC-NL08B-00

ACC-NL08-00

Code	Voltage	Watt	Lumen(±5%)	Class
NL08A-10W	AC200-240V	10W	530lm	I
NL08B-10W	AC200-240V	10W	530lm	I

connect



IINNO Ltd
Unit 7, 8/F, Tower B
83 King Lam Street
Lai Chi Kok, Kowloon
Hong Kong
Tel: +86 (0)769 2301 0151 / 2
WhatsApp: +86 139 2290 5402
Email: sales@iinno-lighting.com
Web: www.iinno-lighting.com

