iinno lighting

Commercial Linear Lighting

iinno Lighting delivers certified, high-performance solutions for commercial, municipal, and industrial use, trusted by developers worldwide for quality, scale, and long-term reliability.



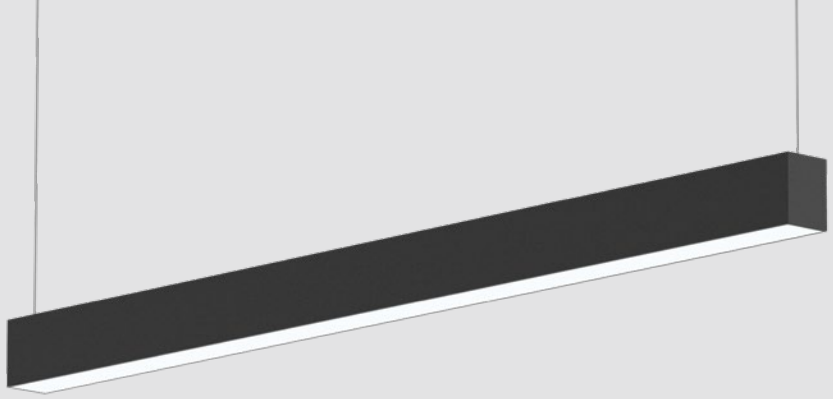

DB77A

Linear light



DB77A is a seamless splicing design with straight/ corner/cross splicing connector. Two lamp cover options: Standard cover and anti-gla e cover. Adopt high lumen SMD light source, flic er free and high efficien driver make a be er lumen. Functions: own lighting, p&down lighting, adjustable CT, emergency and sensor. Multiple installation:penda t/surface mounted/wall mounted/ recessed/track. Modular design: replaceable driver and emergency module.

Materials of Housing : Aluminium
Materials of Optics : PC

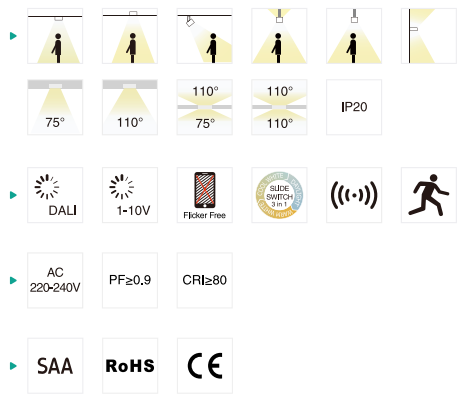

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB77A-600-17W	17W	602x57x76	1680lm	1.70	6PCS
DB77A-600-22W	17W+5W	602x57x76	2250lm	1.70	6PCS
DB77A-1200-36W	36W	1212x57x76	3850lm	2.70	6PCS
DB77A-1200-45W	36W+9W	1212x57x76	4850lm	2.70	6PCS
DB77A-1500-45W	45W	1512x57x76	4850lm	3.50	6PCS
DB77A-1500-56W	45W+11W	1512x57x76	6000lm	3.50	6PCS

CCT — 3000K 4000K 5700K

Finish — White Black

Installation accessories — Suspension kit

Recessed ACC-DB66-0300

Suspended with ceiling plate ACC- -0200

Track ACC-DB77A-0500



DB77A | DIFFUSER TYPE

Upper Glowing Accessories

Connection accessories





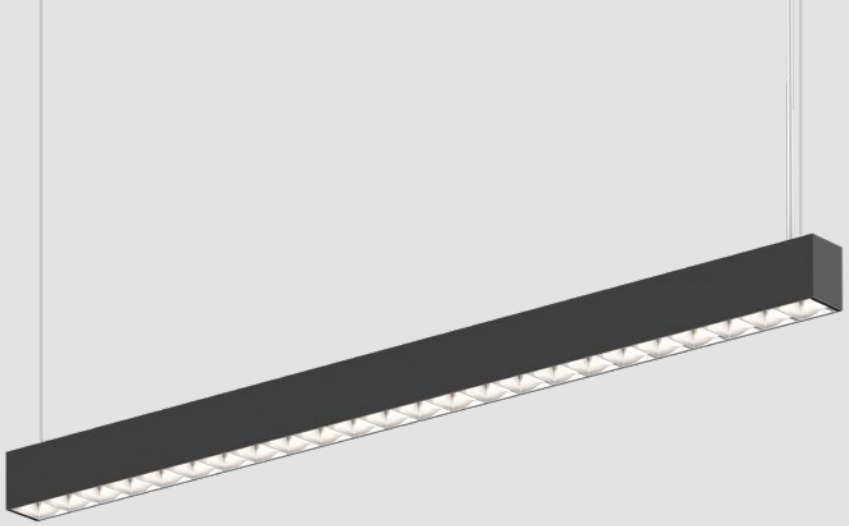

DB77B

Linear light



DB77B is a UGR<19 SMD linear light with reflec or design, The splicing with L/T/X node connector,making a very convenient connection. t can be down lighting CCT changeable is optional) o up&down lighting. Functions:1-10 /DALI dimming, emergency. Multiple installation: sur ace mounted/Recessed/Suspending.

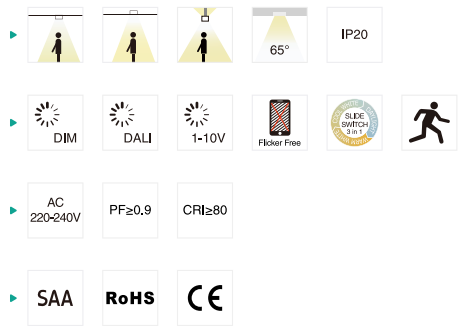

Materials of Housing : Aluminium
Materials of Optics : PC

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB77B-1200-36W	36W	Ø1212x57x76	3650lm	2.30	6PCS
DB77B-1200-48W	48W	Ø1212x57x76	4850lm	2.30	6PCS
DB77B-1500-45W	45W	Ø1512x57x76	4550lm	2.80	6PCS
DB77B-1500-60W	60W	Ø1512x57x76	6100lm	2.80	6PCS
DB77B-1800-54W	54W	Ø1812x57x76	5500lm	3.40	6PCS
DB77B-1800-65W	65W	Ø1812x57x76	6600lm	3.40	6PCS
DB77B-2400-72W	72W	Ø2412x57x76	7300lm	4.50	2PCS
DB77B-2400-96W	96W	Ø2412x57x76	9700lm	4.50	2PCS

CCT — 3000K — 4000K — 5700K

Finish — White — Black

Installation accessories





DB77B | GRILL REFLECTOR UGR<19



Connection accessories

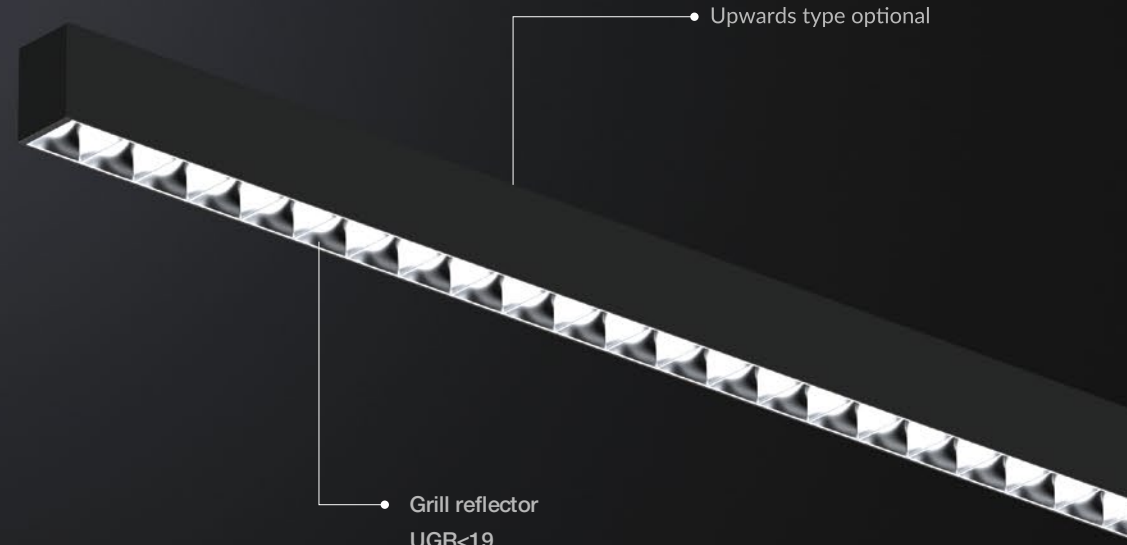

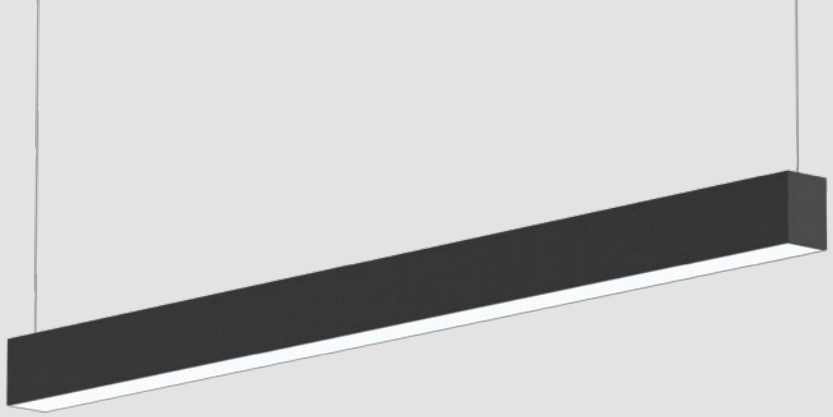

DB66

Linear light



DB66A/B is a new linkable design light. Adopt high lumen efficien SMD LED. Pendant/surface mounted/wall mounted installation vailable.Up and down light e ect for wall mounted and pendant installation. nterchangeable CCT, DALI/0-10V dimming for options. Tridonic DALI driver available.

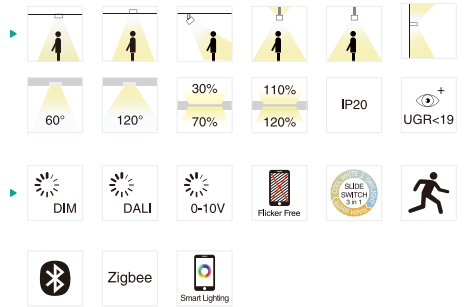

Materials of Housing : Aluminium
Materials of Optics : PC

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB66A-1200-36W	36W	1204x56x75	3950lm/4800lm	2.75	6PCS
DB66A-1200-50W	50W	1204x56x75	6200lm/6400lm	2.75	6PCS
DB66A-1500-42W	42W	1504x56x75	4750lm/5400lm	3.35	6PCS
DB66A-1500-60W	60W	1504x56x75	6450lm/7500lm	3.35	6PCS
DB66B-1200-36W	36W	1204x56x75	3950lm/4300lm	2.75	6PCS
DB66B-1200-50W	50W	1204x56x75	5300lm/6400lm	2.75	6PCS
DB66B-1500-42W	42W	1504x56x75	4600lm/4800lm	3.35	6PCS
DB66B-1500-60W	60W	1504x56x75	6600lm/7600lm	3.35	6PCS

CCT — 3000K 4000K 5700K

Finish — White Black

Installation accessories



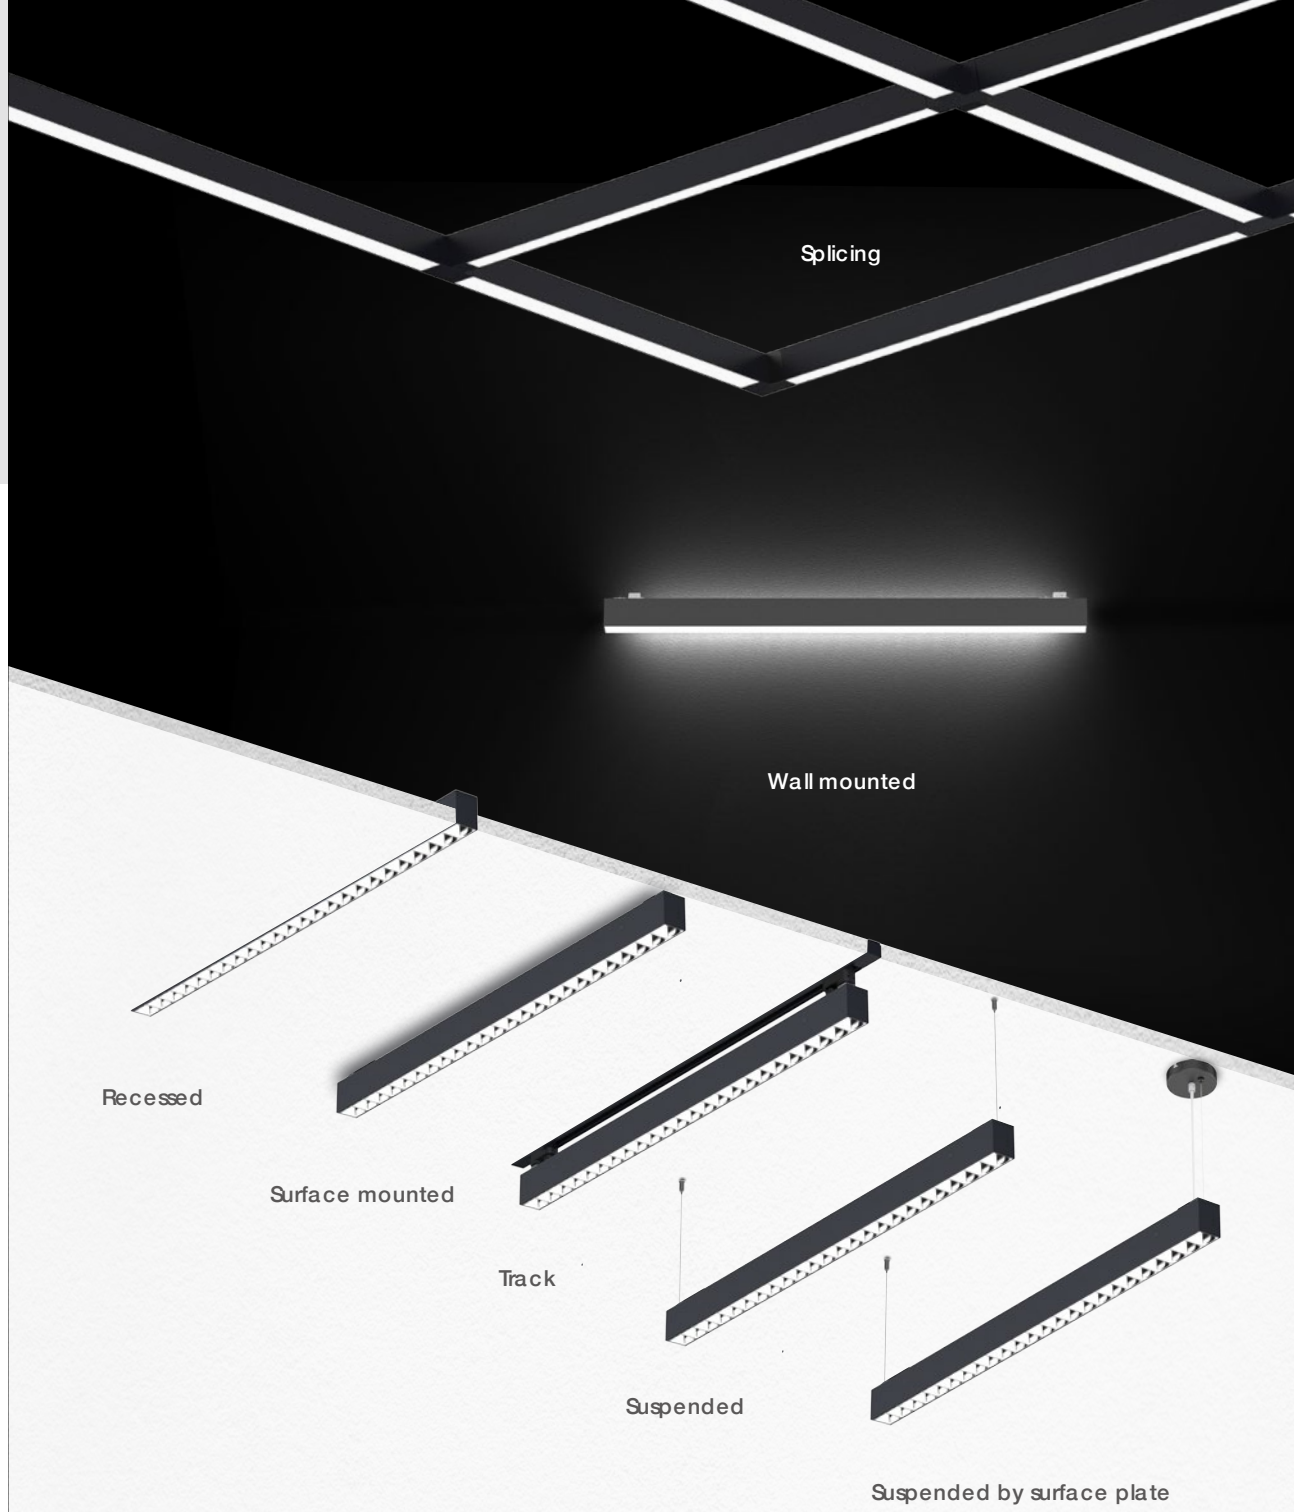

Multi-installation

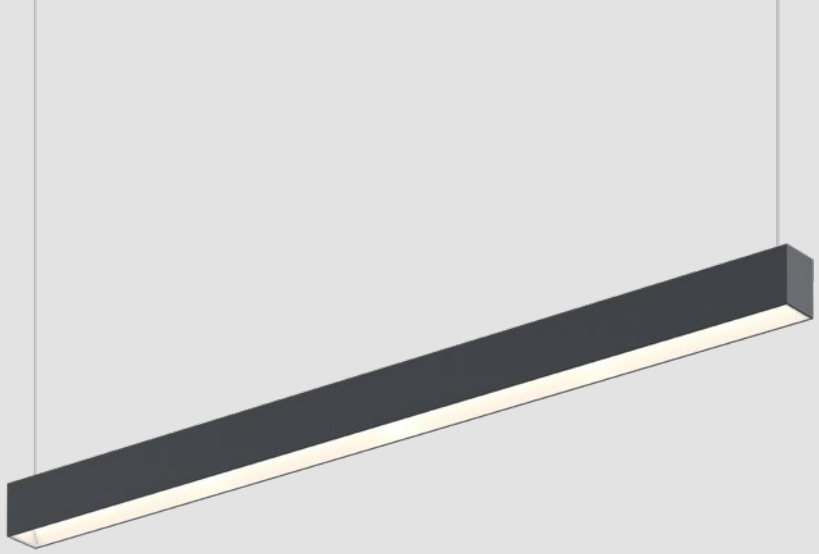

DB66D
Linear light



The DB66D is a new model upgraded based on DB66A, it adopts super high lumen efficien SMD LED reach 140lm/w. Internal structure is special designed to control glare light acheive UGR<19. It also available with linking, DIY with up lighting module,6 various installaiton methods.

Materials of Housing : Aluminium
Materials of Optics : PC

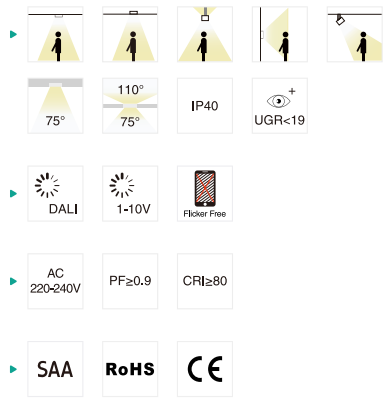

Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB66D-1200-28W	28W	1204x56x75	1208x65	4000lm	2.75	6PCS
DB66D-1200-40W	40W	1204x56x75	1208x65	5550lm	2.75	6PCS
DB66D-1500-35W	35W	1504x56x75	1508x65	5100lm	3.35	6PCS
DB66D-1500-49W	49W	1504x56x75	1508x65	6850lm	3.35	6PCS

CCT — 3000K 4000K 5700K

Finish — White Black

Installation accessories

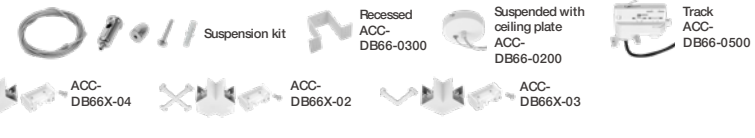

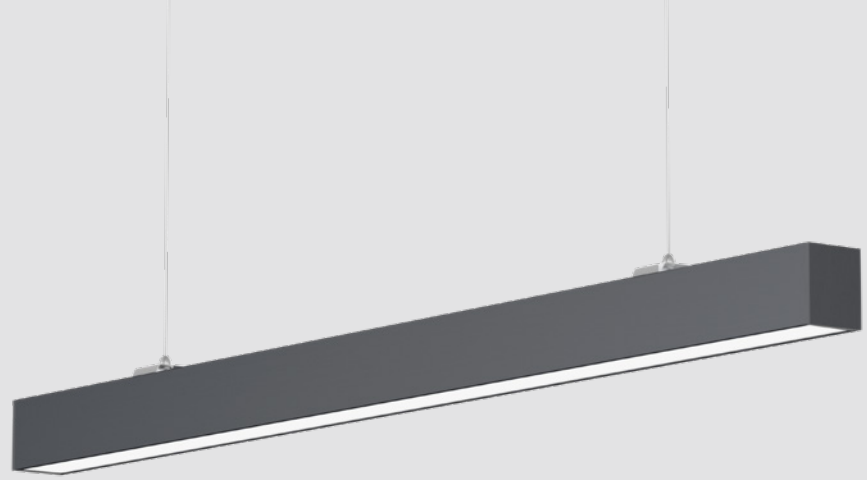

DB158
Linear light



DB158 LED Linear Light is a perfect replacement for traditional tube. t adopt high lumen SMD light source, CCT changeable by dip switch. Loop in and loop out design, fast and convenient wiring. Flicker free driver. Support surface mounted and suspending installations

Materials of Housing : Aluminium
Materials of Optics : PS



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB158-1200-30W	30W	1200x58.6x70	3400lm	1.55	6PCS
DB158-1200-40W	40W	1200x58.6x70	4400lm	1.55	6PCS
DB158-1500-40W	40W	1500x58.6x70	4400lm	1.96	6PCS
DB158-1500-60W	60W	1500x58.6x70	6300lm	1.96	6PCS
DB158B-1200-30W	30W	1200x58.6x70	3400lm	1.55	6PCS
DB158B-1200-40W	40W	1200x58.6x70	4400lm	1.55	6PCS
DB158B-1500-40W	40W	1500x58.6x70	4400lm	1.96	6PCS
DB158B-1500-60W	60W	1500x58.6x70	6300lm	1.96	6PCS

CCT — 3000K 4000K 5700K

Finish — White Black

Installation accessories



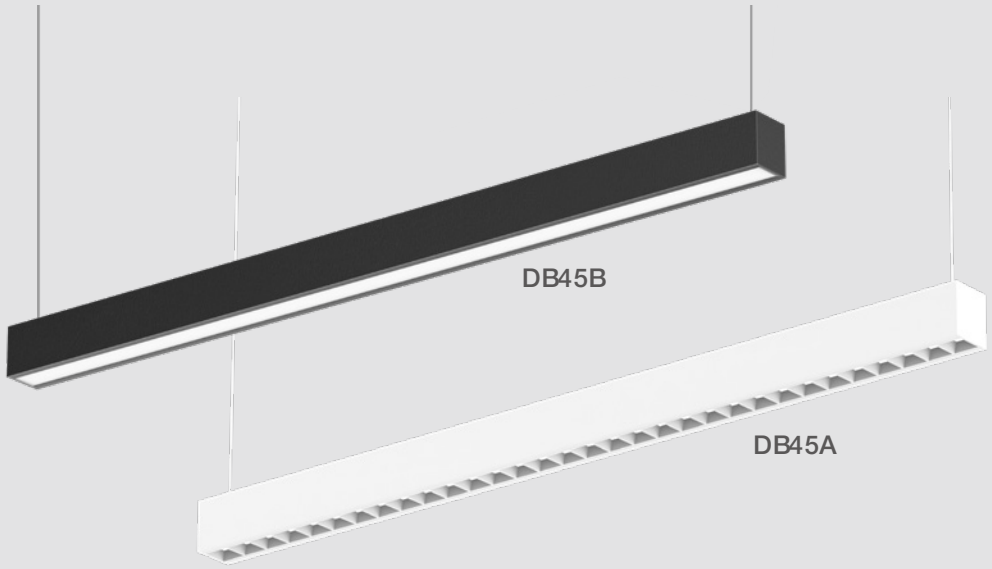

DB45A/B

Linear light



Module changeable design LED ba en DB45 provides good heat dissipation, qualit light and substantial energy saving. Suspended , surface mounted and splicing installation o tional

Materials of Housing : Aluminium
Materials of Optics : PC



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB45A-600-20W	20W	604x60x70	2500lm	1.15	12PCS
DB45A-1200-40W	40W	1204x60x70	5200lm	2.20	6PCS
DB45B-600-20W	20W	604x60x70	2400lm	1.15	12PCS
DB45B-1200-40W	40W	1204x60x70	4800lm	2.20	6PCS

CCT — 3000K 4000K 5700K

Finish — White Black

Installation accessories — Suspension kit Splicing kit

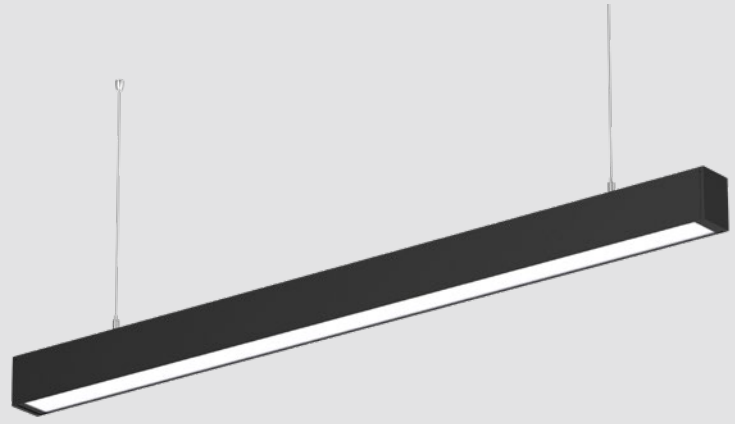

DB163

Linear light

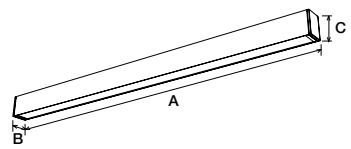

DB163 is IP54 water-proof design LED linear light, the high lumen LED makes it high lumen efficien 125lm/W design.

Materials of Housing : Aluminium+PC
Materials of Optics : PC



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB163-1200-32W	32W	1215x57x76	4200lm	2.60	6PCS
DB163-1500-38W	38W	1515x57x76	5200lm	3.08	6PCS

CCT — 3000K 4000K 5700K

Finish — White Black Silver

Installation accessories — Suspension kit

Splicing accessories ACC-DB163

Suspension splicing ACC-DB163

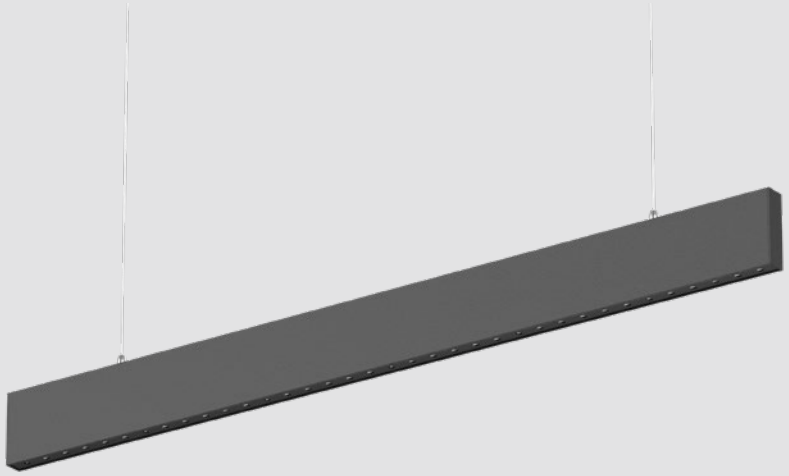

DB176

Linear light



DB176 is anti-slim e linear light with 29mm width. It is anti-gla e design with UGR<19. Internal flic er free driver and triac/DALI dimming are available. Surface mounted and suspended for options

Materials of Housing : Aluminium
Materials of Optics : PC

30° IP20 UGR<19
DIM DALI Flicker Free
AC 220-240V PF≥0.9 CRI≥80
SAA RoHS CE

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB176-1200-28W	28W	1200x29x103	2250lm	1.87	6PCS
DB176-1600-34W	34W	1595x29x103	2800lm	2.37	4PCS
DB176-2000-40W/42W	40W(Non-dim/DALI) 42W(Triac)	1990x29x103	3100lm	2.87	4PCS

CCT — 2700K 3000K 4000K

Finish — White Black

Installation accessories



Round ceiling plate
ACC-DB176-(DA/DO)-BK(WT)-0250



Square ceiling plate
ACC-DB176-(DA/DO)-BK(WT)-0251

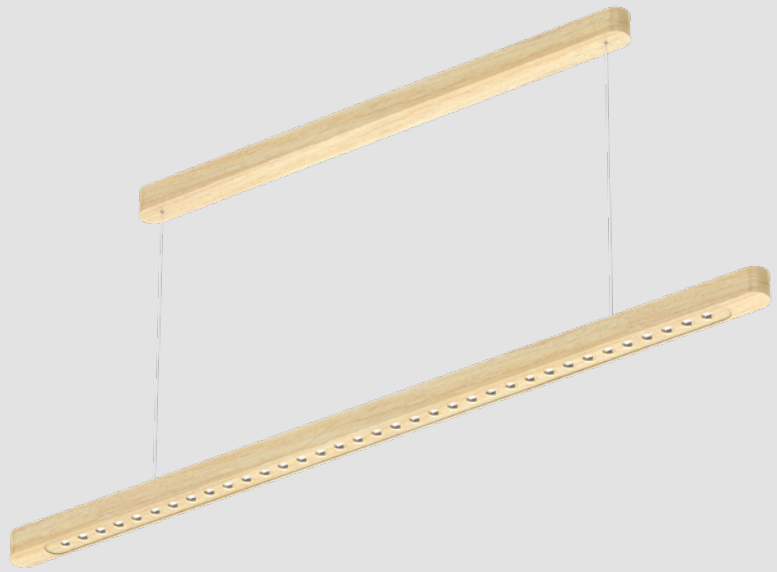

DB198

Linear light



DB198 LED brich ba en light is an ideal lighting solutio for carbon emission reduction and e vironmental protection. t adopts high lumen SMD LED which could be 130lm/W. Internal driver design with power changeable and DALI avaialable. Up & down lighting design provides great lighting per ormance,the upper lighting can be on o .

Materials of Housing : Wooden
Materials of Optics : PC

110° 36°/60° IP20 UGR<19
DALI Flicker Free Adjustable Power
AC 220-240V PF≥0.9 CRI≥80
SAA RoHS CE

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB198A-1200-34W-A5	(34W/31W/29W/27W/25W) (27W/25W/23W/21W/20W)	1200x40x40	4600lm	1.50	6PCS
DB198A-1500-45W-A5	(45W/42W40W/38W/36W) (35W/33W/31W/30W/28W)	1500x40x40	6200lm	2.00	6PCS

CCT — 3000K 4000K

Finish — Wood grain

Installation accessories

Round ceiling plate
ACC-DB198-BK-0250

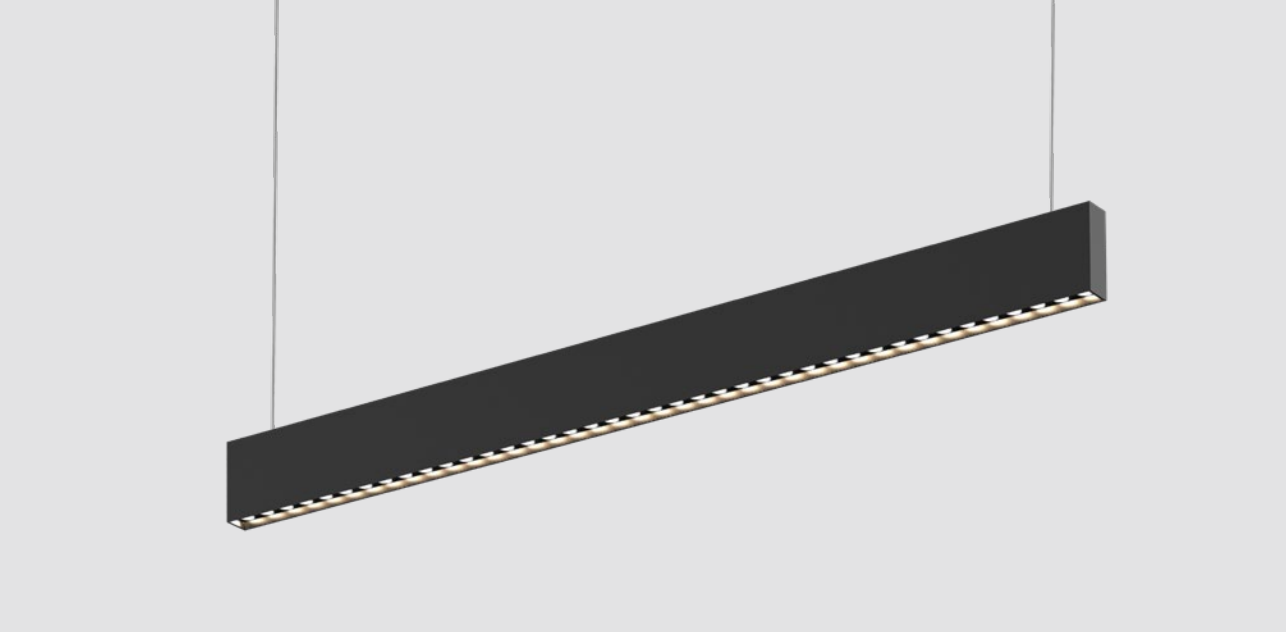

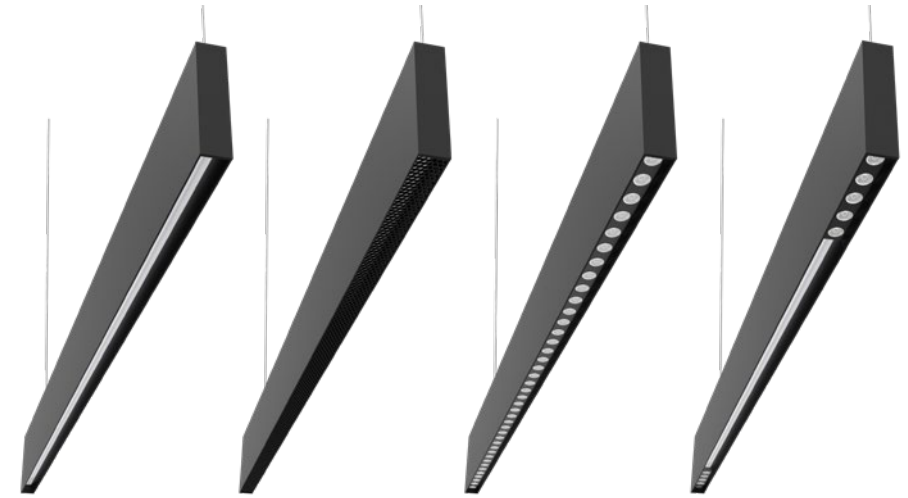

DB146A DB146B DB146C DB146D

DB146

Linear light



The DB146 ba en has a minimalist appearance, adpots a variety of optics, it is per ect for a variety of use environment. Plug-in link and seamless splicing design e ecti ely improve the installation time Adopts 100lm/W & 120lm/W SMD high lumen efficien as option ;flic er free driver with high efficien . Up & down lighting design, up 20% & d wn 80%. Interchangeable CCT(3000K+4000K) and up lighting ontrol with the same slide switch.DIY module design option: di ect lighting module, hon ycomb module, lens module, direct lighting + lens module

Materials of Housing : Aluminium
Materials of Optics : PMMA / PMMA+PC



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB146A-600-18W	15W	605x34x105	1650lm	1.40	6PCS
DB146A-600-18W	15W+3W	605x34x105	2000lm	1.40	6PCS
DB146A-900-25W	20W	905x34x105	2200lm	2.10	6PCS
DB146A-900-25W	20W+5W	905x34x105	2700lm	2.10	6PCS
DB146A-1200-38W	30W	1205x34x105	4000lm	2.70	6PCS
DB146A-1200-38W	30W+8W	1205x34x105	4900lm	2.70	6PCS
DB146A-1500-50W	40W	1505x34x105	5200lm	3.20	6PCS
DB146A-1500-50W	40W+10W	1505x34x105	6400lm	3.20	6PCS
DB146B-1200-38W	30W	1205x34x105	1800lm	2.70	6PCS
DB146B-1200-38W	30W+8W	1205x34x105	2850lm	2.70	6PCS
DB146B-1500-50W	40W	1505x34x105	2400lm	3.20	6PCS
DB146B-1500-50W	40W+10W	1505x34x105	3700lm	3.20	6PCS
DB146C-1200-38W	30W	1205x34x105	4000lm	2.70	6PCS
DB146C-1200-38W	30W+8W	1205x34x105	4900lm	2.70	6PCS
DB146C-1500-50W	40W	1505x34x105	5200lm	3.20	6PCS
DB146C-1500-50W	40W+10W	1505x34x105	6400lm	3.20	6PCS
DB146D-1200-38W	30W	1205x34x105	4000lm	2.70	6PCS
DB146D-1200-38W	30W+8W	1205x34x105	4900lm	2.70	6PCS
DB146D-1500-50W	40W	1505x34x105	5200lm	3.20	6PCS
DB146D-1500-50W	40W+10W	1505x34x105	6400lm	3.20	6PCS

CCT 3000K 4000K 5000K

Finish White Black

Installation accessories


Suspension kit
ACC-DB146-0200


Wall mounted kit
ACC-DB146-0400


Suspended with ceiling plate
ACC-DB146-BK-0200


Honeycomb
ACC-DB146-BK

Upward lighting modul
ACC-DB146-600/900/1200/1500


Splicing
ACC-DB146-01



DB197A

DB197B

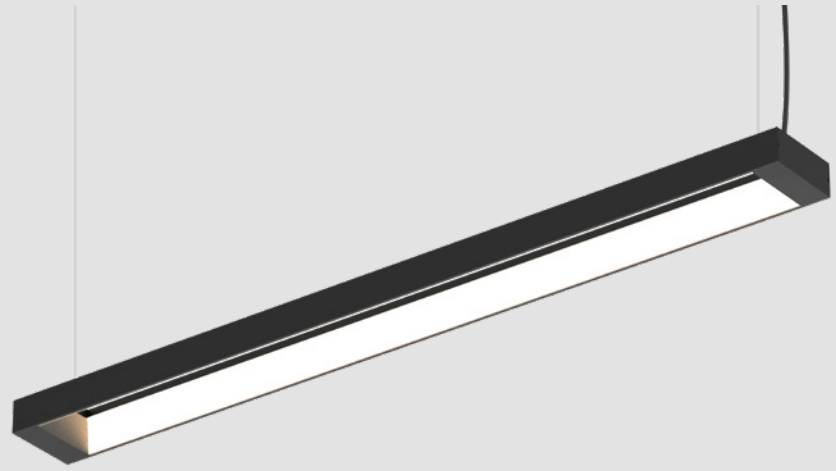

DB197

Wooden Linear light

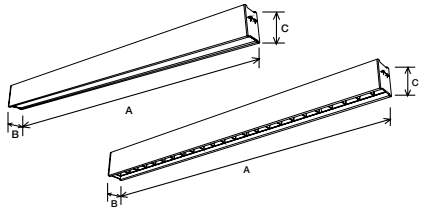

DB197 brich ba en light is an ideal lighting solution or double carbon and environmental protection It adopts high lumen SMD LED with 2CCT UGR19 low glare light and uses built-in driver that support 0-10V/DALI dim. It's also available for both pendant and surface mounted installation

Materials of Housing : Wooden
Materials of Optics : PC

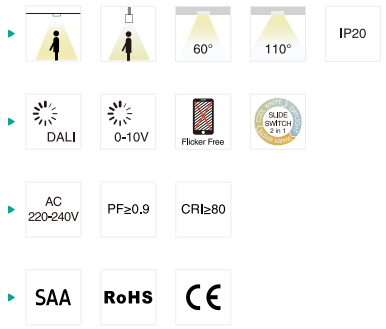

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB197A-1200-28W	28W	1208x70x100	3800lm	1.50	4PCS
DB197A-1200-36W	36W	1208x70x100	4800lm	1.50	4PCS
DB197A-1500-32W	32W	1508x70x100	4500lm	1.80	4PCS
DB197A-1500-50W	50W	1508x70x100	7000lm	1.80	4PCS
DB197B-1200-28W	28W	1208x70x100	3800lm	1.50	4PCS
DB197B-1200-36W	36W	1208x70x100	4800lm	1.50	4PCS
DB197B-1500-32W	32W	1508x70x100	4500lm	1.80	4PCS
DB197B-1500-50W	50W	1508x70x100	7000lm	1.80	4PCS

CCT — 3000K — 4000K

Finish — Wood grain

Installation accessories — Suspension kit

DB25

Linear light



DB25 Linear with suspended and hollow design highlight the brand features,which makes the light go both up and down sides, The light for upside can reduce the extra light decoration

Materials of Housing : Aluminium
Materials of Optics : PC



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB25-900-20W	20W	922x115x48.8	2000lm	1.46	6PCS
DB25-1200-40W	40W	1222x115x48.8	3800lm	1.86	6PCS
DB25-1600-60W	60W	1622x115x48.8	5800lm	2.47	6PCS

CCT — 3000K — 4000K — 5700K

Finish — White — Black

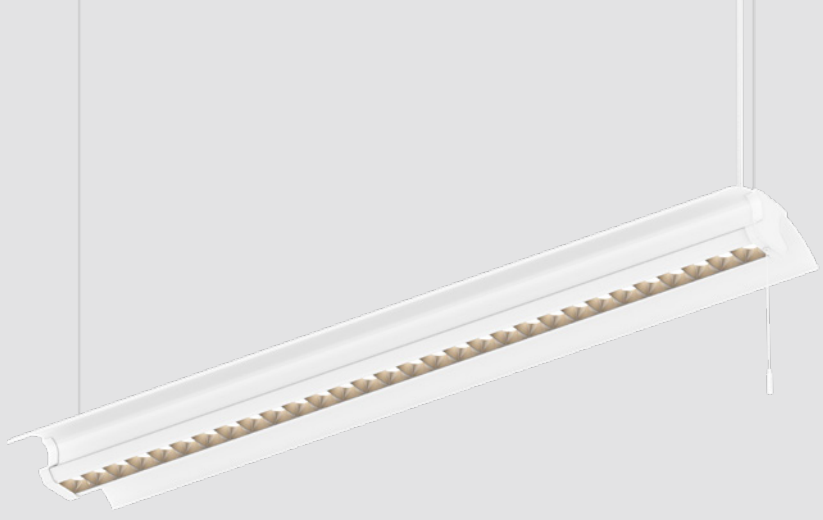

DB147
Linear light



Not only with modern and classic aesthetics looking, DB147 linear light also has a special optic design: up&down lighting and ymmetrical lighting with special wing shape). It adopts high lumen efficien SMD light source, 1W LED for up&down main lighting, 0.2 LED for Symmetrical soft lig ting. The shape design highly increased lighting a ea, also lowered the glare to make it UGR<16. It is suitable for dining room and o e to achieve both lighting ect and decoration ect.

Materials of Housing : Aluminium
Materials of Optics : PC

50° | 35% 65% | 100% | IP20 | UGR<16

Flicker Free | SLIDE SWITCH 2 in 1 | SLIDE SWITCH 3 in 1

AC 220-240V | PF≥0.9 | CRI≥80

SAA | RoHS | CE

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB147-1200-36W	36W	1172x236x74	3500lm	3.70	2PCS
DB147-1200-45W	45W	1172x236x74	4800lm	3.70	2PCS
DB147-1500-40W	40W	1552x236x74	4100lm	3.70	2PCS
DB147-1500-60W	60W	1552x236x74	5800lm	3.70	2PCS

CCT — 3000K 4000K 5700K

Finish — White



DB155
Linear light

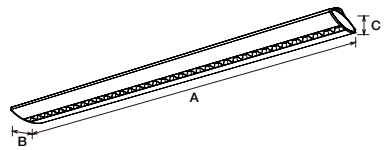

DB155 is a pendant light with curved appearance design. It adopts high lumen SMD light source and bright silver reflec or, giving comfortable lighting e ect acheive UGR<19. It available with 3CCT, seamless splicing, with up and down lighting dei gn, it's an ideal pendannt light for o e lighting

Materials of Housing : Aluminium
Materials of Optics : PC

45° | IP20 | UGR<19

DALI | Flicker Free | SLIDE SWITCH 3 in 1

AC 200-264V | PF≥0.9 | CRI≥80

SAA | RoHS | CE

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB155-1200-36W	9W(Indirect)+27W(Direct)	1161.5x150x40	3700lm	2.70	6PCS
DB155-1200-50W	12.5W(Indirect)+37.5W(Direct)	1161.5x150x40	4800lm	2.70	6PCS
DB155-1500-40W	10W(Indirect)+30W(Direct)	1143.5x150x40	4000lm	3.25	6PCS
DB155-1500-60W	15W(Indirect)+45W(Direct)	1143.5x150x40	5800lm	3.25	6PCS

CCT — 3000K 4000K 5700K

Finish — White Black

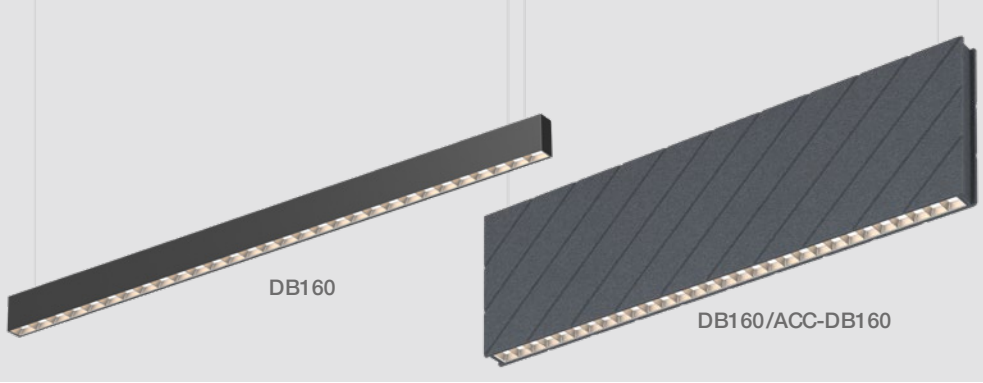

DB160

Acoustic linear light

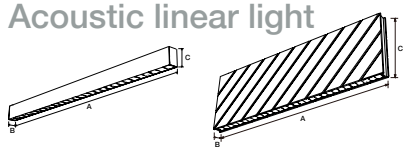

DB160 is an integrated acoustic linea system that o ers unmatched possibilities o control noise and provide optimal lighting in ommercial environments. For optic design, DB160 adopts high lumen SMD, direct and indirect lighting design, o ering a uniform light distribution. or sound management, the polyester fibe sound-absorbing board is with striped grooves, and the concave-convex structure can fully diffuse excess sound rays, which can realize frequency sound absorption and diffusion, making the sound cle er and fuller, be er integration f acoustics and modern lamps t gether. It supports CCT adjustable and DALI dim.

Materials of Housing : Polyester fibre+Aluminium

Materials of Optics : PC

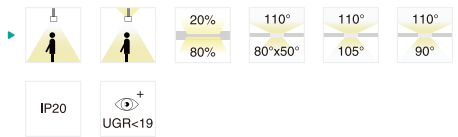

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB160A-1200-36W	36W	1252x45x80	3800lm	2.23	6PCS
DB160A-1500-50W	50W	1480x45x80	5000lm	2.83	6PCS
DB160B-1200-36W	36W	1252x45x80	4550lm	2.23	6PCS
DB160B-1500-50W	50W	1480x45x80	6200lm	2.83	6PCS
DB160C-1200-36W	36W	1252x45x80	3800lm	2.23	6PCS
DB160C-1500-50W	50W	1480x45x80	5800lm	2.83	6PCS
DB160A-1200-46W/ACC-DB160	36W(Direct)	1292x64x400	3800lm	5.28	1PCS
DB160A-1200-46W/ACC-DB160	10W(Indirect)+36W(Direct)	1292x64x400	5000lm	5.28	1PCS
DB160A-1500-65W/ACC-DB160	50W(Direct)	1500x64x400	5000lm	5.95	1PCS
DB160A-1500-65W/ACC-DB160	15W(Indirect)+50W(Direct)	1500x64x400	6800lm	5.95	1PCS
DB160B-1200-46W/ACC-DB160	36W(Direct)	1292x64x400	4550lm	5.28	1PCS
DB160B-1200-46W/ACC-DB160	10W(Indirect)+36W(Direct)	1292x64x400	5750lm	5.28	1PCS
DB160B-1500-65W/ACC-DB160	50W(Direct)	1500x64x400	6200lm	5.95	1PCS
DB160B-1500-65W/ACC-DB160	15W(Indirect)+50W(Direct)	1500x64x400	8000lm	5.95	1PCS
DB160C-1200-46W/ACC-DB160	36W(Direct)	1292x64x400	3800lm	5.28	1PCS
DB160C-1200-46W/ACC-DB160	10W(Indirect)+36W(Direct)	1292x64x400	4800lm	5.28	1PCS
DB160C-1500-65W/ACC-DB160	50W(Direct)	1500x64x400	5800lm	5.95	1PCS
DB160C-1500-65W/ACC-DB160	15W(Indirect)+50W(Direct)	1500x64x400	7500lm	5.95	1PCS

CCT — 3000K 4000K 5700K

Finish — White Black

Installation accessories — Acoustic lig ting fixt e DB160/ACC-DB160-1200/1500; Upward LED module ACC-DB160-1200/1500; Round ceiling plate ACC-DB160-(DA/D0)-BK(WT)-0200



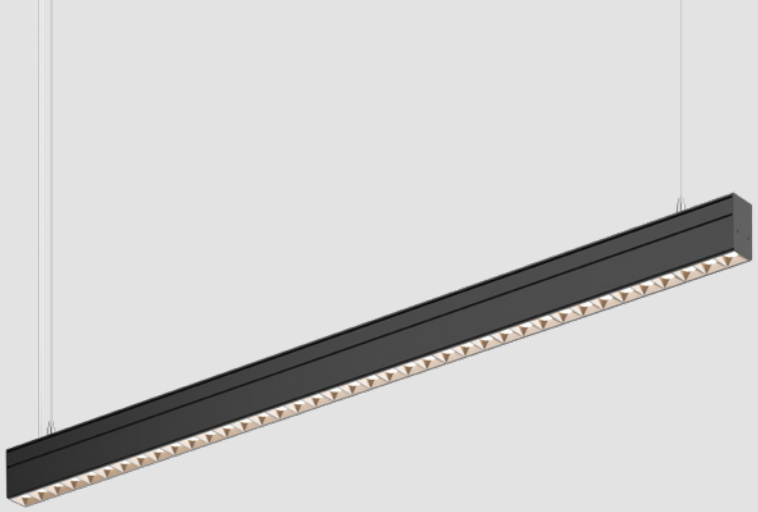

DB165
Linear light



DB165 linear light is anti-gla e optic design with multiple beam angles, ering various light distribution options. t adopts internal driver and high lumen SMD, also supports seamless splicing and DALI dim.

Materials of Housing : Aluminium
Materials of Optics : PC

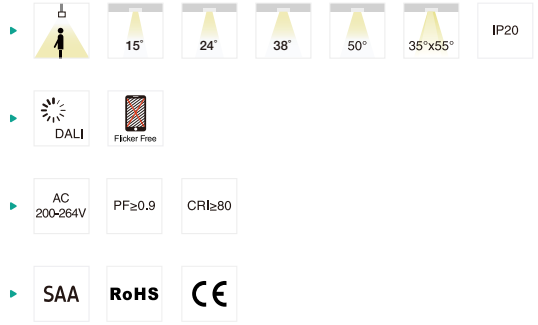

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB165-1200-42W	42W	1180x40x75	4100lm	2.06	6PCS
ACC-DB165-1200-42W	42W	1226x40x75	4100lm	1.84	6PCS

CCT — 3000K 4000K 5700K

Finish — White Black

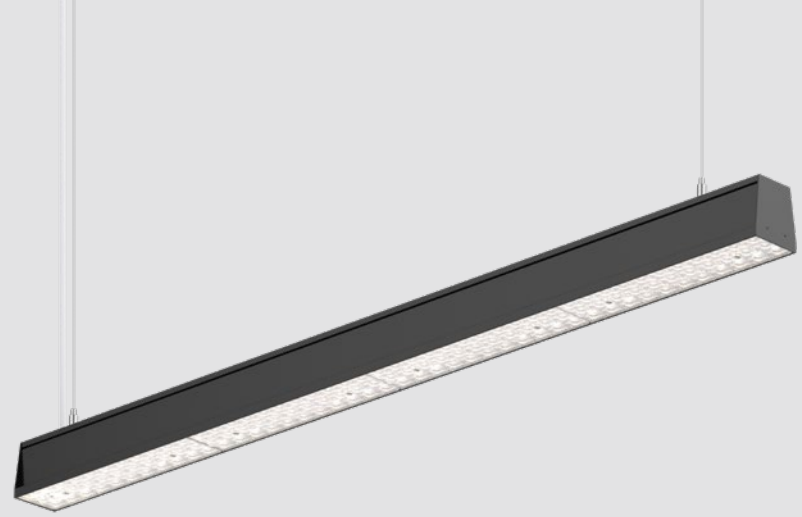

DB166
Linear light

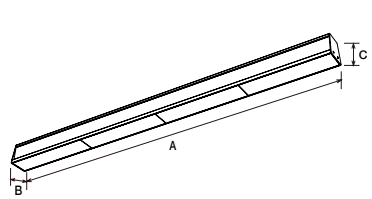

DB166 linear light is 120lm/W high lumen design,that achieves energy saving conception. t has multiple beam angles,o ering various light distribution o tions. t adopts internal driverand high lumen SMD,also supports seamless splicing and DALI dim.

Materials of Housing : Aluminium
Materials of Optics : PC



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB166-1200-40W	40W	1152x66x73	5000lm	2.73	6PCS
ACC-DB166-1200-40W	40W	1198x66x73	5000lm	2.45	6PCS
DB166-1200-60W	60W	1152x66x73	7000lm	2.73	6PCS
ACC-DB166-1200-60W	60W	1198x66x73	7000lm	2.45	6PCS

CCT — 3000K 4000K 5700K

Finish — White Black

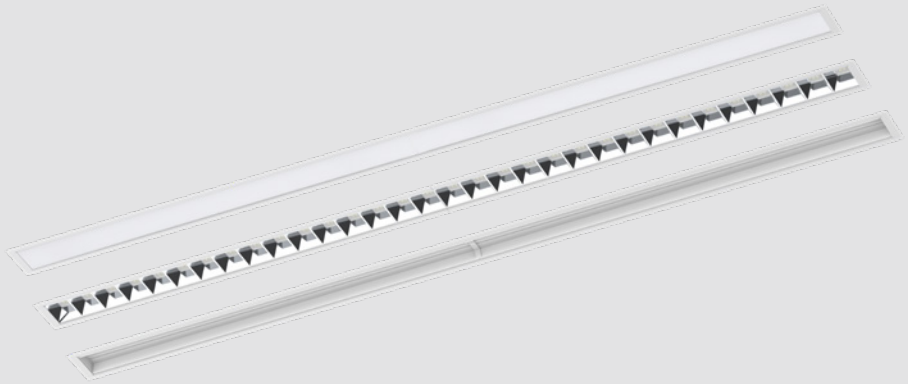

DB151

Linear light



DB151 series LED Ba en Light is a functional ecessed ba en light which could do di erent length customization, no limitation or splicing quantit . Special structure design with di erent covers, splicing shapes, recessed ways. Recessed with N-shape, T-shape and H-shape accessories as per installation demands. nterchangeable CCT with slide switch. Support non-dim and DALI dimming. DB151A with PC/prismatic diffus s, six kinds of connectors for choice. DB151B with grille design, DB151C with lens design, both of their straight splicing with magnetic end cap

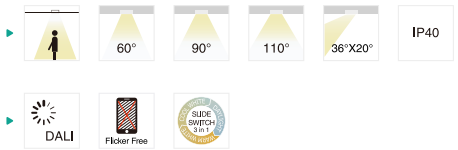

Materials of Housing : Aluminium

Materials of Optics : PC

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB151A/B-600-15W	15W	615x62x29	607x54	1600lm	0.67/0.71	12PCS
DB151A/B-1200-30W	30W	1208x62x29	1201x54	3400lm/3200lm	1.21/1.26	6PCS
DB151A/B-1500-37W	37W	1505x62x29	1498x54	4200lm	1.48/1.54	6PCS
DB151A/B-1800-45W	45W	1802x62x29	1794x54	5000lm	1.78/1.85	6PCS
DB151A/B-2400-60W	60W	2395x62x29	2388x54	6600lm/6200lm	2.27/2.36	6PCS
DB151C-600-15W	15W	615x62x29	607x54	1600lm	0.75	12PCS
DB151C-1200-30W	30W	1208x62x29	1201x54	3200lm	1.37	6PCS
DB151C-1500-37W	37W	1505x62x29	1498x54	4200lm	1.69	6PCS
DB151C-1800-45W	45W	1802x62x29	1794x54	5000lm	2.02	6PCS
DB151C-2400-60W	60W	2395x62x29	2388x54	6200lm	2.62	6PCS

CCT — 3000K — 4000K — 5700K

Finish — White — Black

Installation accessories


Recessed N-shape


Recessed clips

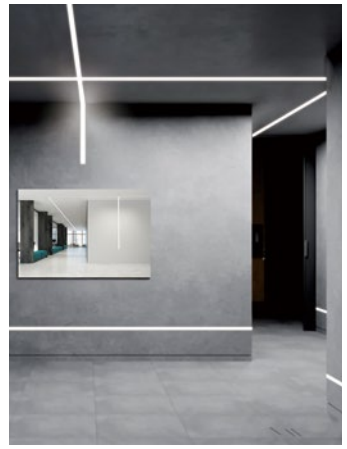

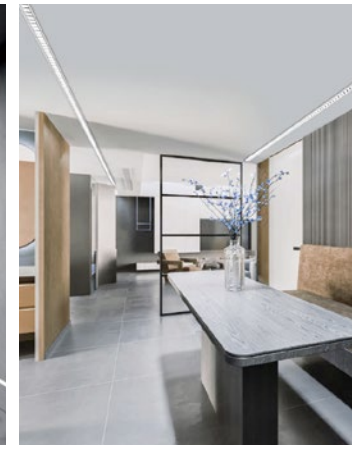





PC diffuser



Prismatic diffuser



Satin louver



Silver reflector (60°)

White reflector (80°)



Wall washer



36 degree with 20 degree polarization

60 degree

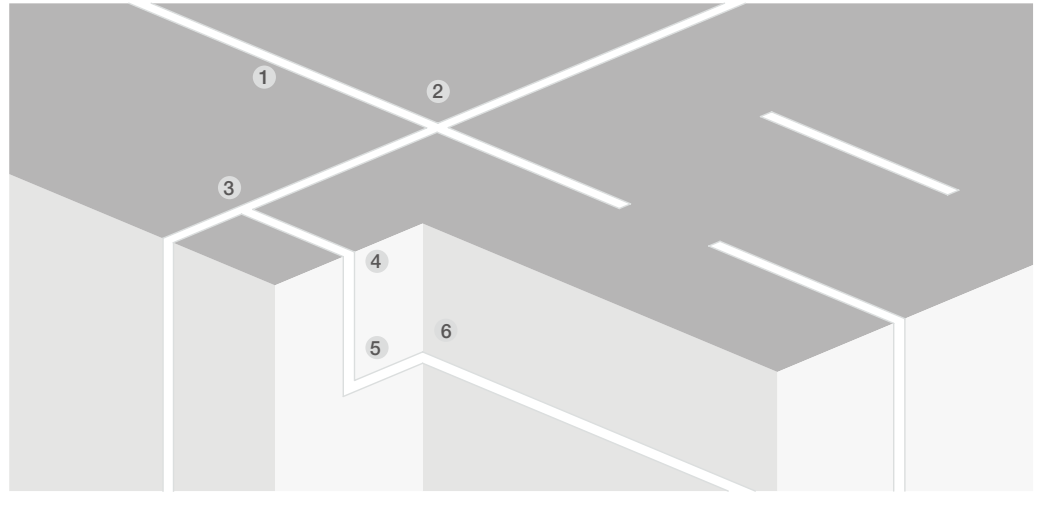


1 ACC-DB151-SL-50


2 ACC-DB151-WT-110-02


3 ACC-DB151-WT-110-04


4 ACC-DB151-WT-110-0351


5 ACC-DB151-WT-110-03

6 **ACC-DB151-WT-110-0350**



B181
Linear light

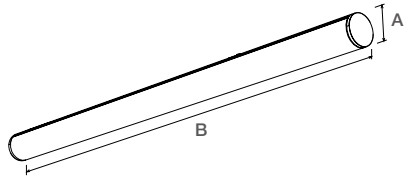

DB181 is a round ba en with multiple functio design, 3CCT, DALI/1-10V/triac dim,emergency, Sensor, etc. It supports surface mount/pendant installation way.

Materials of Housing : PC
Materials of Optics : PC



Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB181-600-20W	20W	Ø72x600	2600lm	0.95	12PCS
DB181-600-23W-S7	23W	Ø72x600	2800lm	0.95	6PCS
DB181-1200-38W-S7	38W	Ø72x1200	4750lm	1.90	6PCS
DB181-1200-40W	40W	Ø72x1200	5100lm	1.90	6PCS
DB181-1800-56W-S7	56W	Ø72x1800	7300lm	2.85	4PCS
DB181-1800-60W	60W	Ø72x1800	7400lm	2.85	4PCS

CCT — 3000K 4000K 5700K

Finish — White Black

Installation accessories — Suspension kit ACC-DB181 — Splicing accessories



DB05
Batten



DB05 is an elegant design with low cost and super slim construction. urface mounted and suspended inatallation vailable.

Materials of Housing : Aluminium
Materials of Optics : PC

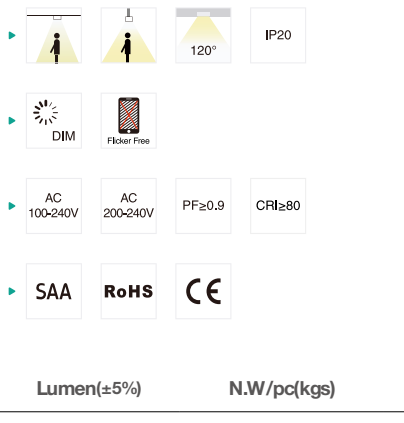

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB05A/C-600-20W	20W	600X90X46	1710lm	0.86	12PCS
DB05A/C-900-30W	30W	900X90X46	2630lm	1.30	12PCS
DB05A/C-1200-40W	40W	1200X90X46	3540lm	1.98	12PCS
DB05B-600-20W	20W	600X90X28	1710lm	0.82	20PCS
DB05B-900-30W	30W	900X90X28	2630lm	0.95	12PCS
DB05B-1200-40W	40W	1200X90X28	3540lm	1.50	12PCS

CCT — 3000K 4000K 5700K

Finish — White Black

Installation accessories — Suspension kit ACC-DB05B-0200 — Surface mounted kit ACC-DB05B-0100

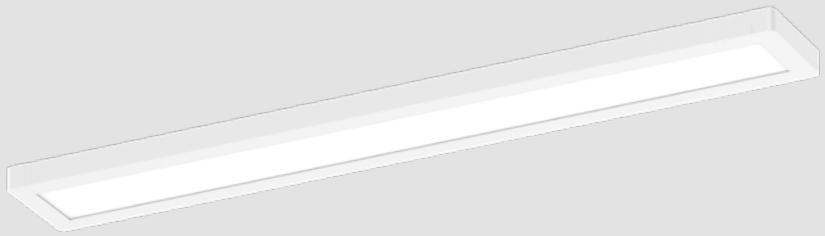

DB179
Batten



DB179 ceiling luminaire is slim and modern design with high lumen SMD, an ideal replacement for traditional T8 luminaire. Four sizes for option: 550/850/1150/1450mm. Supports triac/ DALI dim, surface mounted and pendant installation



Materials of Housing : Aluminium
Materials of Optics : PC

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB179-550-20W	20W	550x160x35	2800lm	0.94	12PCS
DB179-850-30W	30W	850x160x35	4200lm	1.37	6PCS
DB179-1150-40W	40W	1150x160x35	5600lm	1.82	6PCS
DB179-1450-47W	47W	1450x160x35	5700lm	1.82	6PCS
DB179-1450-50W	50W	1450x160x35	6900lm	2.16	4PCS

CCT — 3000K 4000K 5700K

Finish — White Black

Installation accessories — Suspension kit

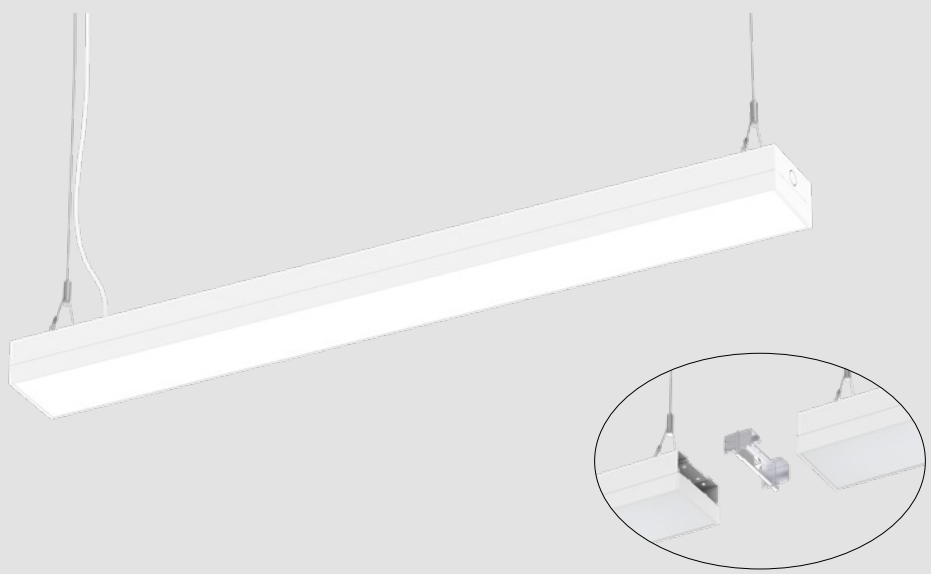

DB105A
Batten



DB105A is a newly seamless splicing ba en design, which adopts high lumen SMD reaching 120lm/W, prism lamp shade to o er a uniform light output and flic er free driver inside. Interchangeable CCT with slide switch is available. Surface mounted, pendant and splicing installation or options.



Materials of Housing : Aluminium
Materials of Optics : PMMA

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB105A-600-24W-C3 Surface mount	24W	600×120×70	3000lm	1.26	12PCS
DB105A-1200-38W-C3 Surface mount	38W	1200×120×70	5000lm	2.35	6PCS
DB105A-1500-55W-C3 Surface mount	55W	1500×120×70	7000lm	2.88	4PCS
DB105A-600-24W-C3 Pendant	24W	600×120×70	3000lm	1.38	12PCS
DB105A-1200-38W-C3 Pendant	38W	1200×120×70	5000lm	2.47	6PCS
DB105A-1500-55W-C3 Pendant	55W	1500×120×70	7000lm	3.00	4PCS

CCT — 3000K 4000K 5700K

Finish — White Black

Installation accessories — Suspension kit

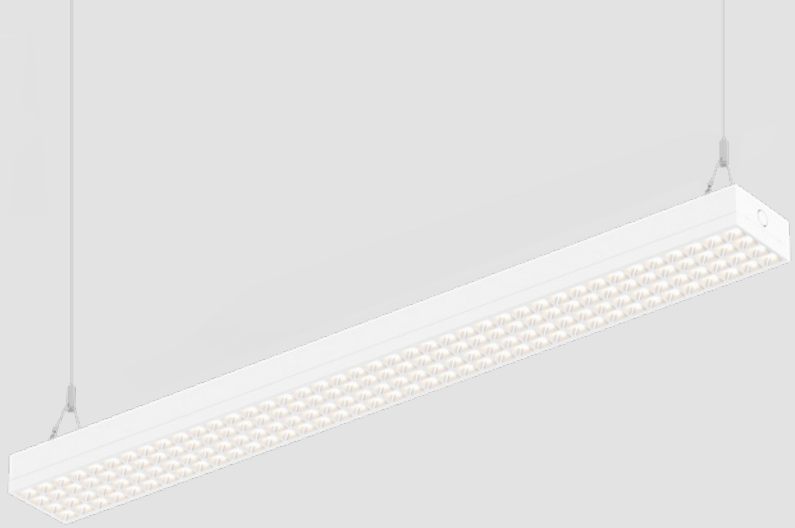

DB157
Batten



DB157 grill ba en light is a low glare and seamless splicing design, which adopts internal flic er free driver and high lumen SMD. It is screwless and quick buckle assembly design for easy and convenient installation, and supports CT adjustable, power adjustable.

Materials of Housing : Aluminium
Materials of Optics : PC

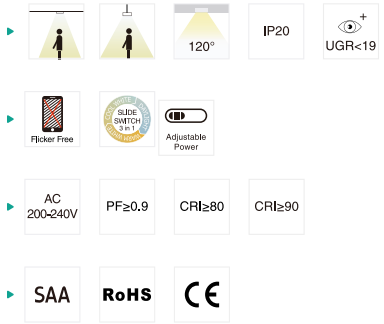

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB157-1200-40W-A4C2	40W/35W/30W/25W	1200X120X59	3200-5400lm	2.92	6PCS
DB157-1200-40W-A4C2 Pendant	40W/35W/30W/25W	1200X120X59	3200-5400lm	3.03	6PCS
DB157-1500-50W-A4C2	50W/45W/40W/35W	1500X120X59	4600-6600lm	3.52	4PCS
DB157-1500-50W-A4C2 Pendant	50W/45W/40W/35W	1500X120X59	4600-6600lm	3.62	4PCS

CCT — 3000K 4000K 5700K

Finish — White Black

Installation accessories







DB104A
Batten



DB66A/B is a new linkable design light. Adopt high lumen e ciency SMD LED. Pendant/surface mounted/ wall mounted installation vailable.Up and down light e ect for wall mounted and pendant installation. Interchangeable CCT, DALI/0-10V dimming for options. Tridonic DALI driver available.

Materials of Housing : Aluminium
Materials of Optics : PC

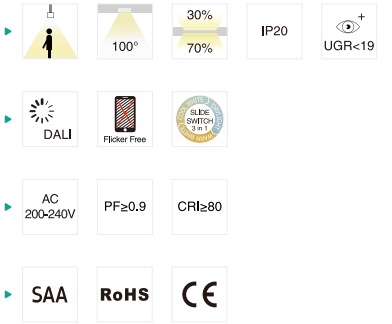

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB104A-1200-40W-DA	40W	1200x200x50	4600lm	4.91	4PCS
DB104A-1200-40W-DAP2	40W	1200x200x50	4600lm	4.91	4PCS
DB104A-1500-55W-DA	55W	1500x200x50	6300lm	5.79	2PCS
DB104A-1500-55W-DAP2	55W	1500x200x50	6300lm	5.79	2PCS

CCT — 3000K 4000K 5700K

Finish — Gray



DB08
Batten



The DB08 ba en achieves low cost with an internal driver and adopts high lumen SMD LED, resulting in simple construction and superio capability, making it suitable for a potentiall large market.

Materials of Housing : SPCC/IRON
Materials of Optics : PC



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB08-600-20W	20W	625X58.5X58.5	2060lm	0.78	10PCS
DB08-1200-40W	40W	1225X58.5X58.5	3960lm	1.50	10PCS
DB08-1500-45W	45W	1525X58.5X58.5	4860lm	1.90	6PCS

CCT — 3000K 4000K 5700K

Finish — White Black

Installation accessories — Suspension kit



DB76
Batten



DB76, with an iron lamp body, provides excellent heat dissipation. t is made of high lumen 2835 SMD LED chips and has an internal driver. The new snap-on bu on design allows for easy installation

Materials of Housing : PC / IRON
Materials of Optics : PC

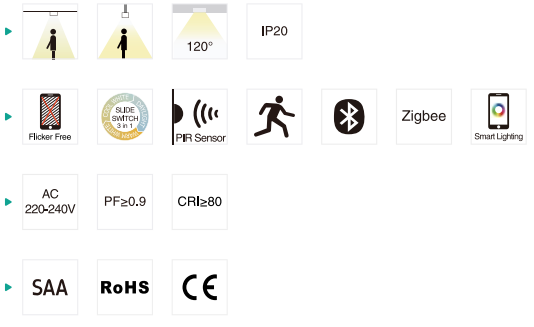

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB76-600-20W	20W	603x71x64	2200lm	0.65	12PCS
DB76-1200-40W	40W	1203x71x64	4600lm	1.28	12PCS
DB76-1500-50W	50W	1503x71x64	6000lm	1.56	12PCS
DB76-1500-58W	58W	1503x71x64	6500lm	1.56	12PCS
DB76-1800-58W	58W	1803x71x64	7000lm	2.16	6PCS
DB76-1800-72W	72W	1803x71x64	8350lm	2.16	6PCS
DB76D-600-20W	20W	603x68.5x64	2150lm	0.65	12PCS
DB76D-1200-40W	40W	1203x71x64	4500lm	1.28	12PCS
DB76D-1500-50W	50W	1503x71x64	5100lm	1.56	12PCS

CCT — 3000K 4000K 5700K

Finish — White Black

Installation accessories — Suspension kit



DB186

Batten



This is a high quality LED ba en with 150lm/w efficien and plug in/plug out modular with multiple functions ca be stocked as accessory. Easy installation ers more possibility for wider applications

Materials of Housing : PC / SPCC
Materials of Optics : PC

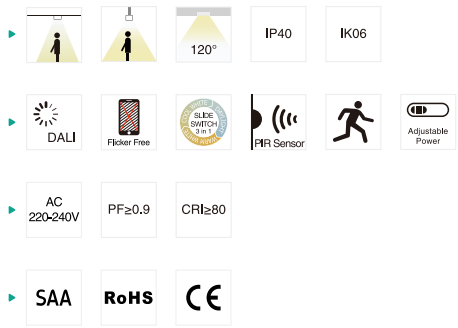

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB186A-600-10W(ECO)	10W	600x65x66	1450lm	0.65	12PCS
DB186A-600-20W(ECO)	20W	600x65x66	2850lm	0.65	12PCS
DB186A-1200-20W(ECO)	20W	1200x65x66	2850lm	1.28	12PCS
DB186A-1200-38W(ECO)	38W	1200x65x66	5400lm	1.28	12PCS
DB186A-1500-30W(ECO)	30W	1500x65x66	4300lm	1.56	12PCS
DB186A-1500-50W(ECO)	50W	1500x65x66	7400lm	1.56	12PCS
DB186A-1800-30W(ECO)	30W	1800x65x66	4300lm	2.16	6PCS
DB186A-1800-50W(ECO)	50W	1800x65x66	7400lm	2.16	6PCS
DB186A-600-20W(STD)	20W/18W/15W/10W	600x65x66	2850lm	0.65	12PCS
DB186A-1200-40W(STD)	40W/35W/30W/20W	1200x65x66	5700lm	1.28	12PCS
DB186A-1500-50W(STD)	50W/40W/32W/25W	1500x65x66	7100lm	1.56	12PCS
DB186A-1800-60W(STD)	60W/50W/40W/30W	1800x65x66	8500lm	2.16	6PCS
DB186A-600-18W(PRO)	18W/15W/13W/9W	600x65x66	3250lm	0.65	12PCS
DB186A-1200-30W(PRO)	30W/25W/20W/15W	1200x65x66	5450lm	1.28	12PCS
DB186A-1500-38W(PRO)	38W/33W/28W/29W	1500x65x66	6900lm	1.56	12PCS
DB186A-1800-48W(PRO)	48W/40W/32W/24W	1800x65x66	8700lm	2.16	6PCS

CCT — 3000K — 4000K — 5700K

Finish — White

Installation accessories



Suspension kit
ACC-DB121-0201

SIMPLE **MODULAR** DESIGN WITH HIGH LUMEN **150/180LM/W**





DB121

Batten





DB121 Ba en light adopts high lumen SMD LED with 120lm/w and high light transmittan e PC shade, loop in/ out and fast connector design for easier wire connection, it's with multiple install tion: sur ace mounted, suspended, splicing as well 1~10V, DALI and 3CCT function vailable.

Materials of Housing : PC/SPCC
Materials of Optics : PC

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB121A-600-17W	17W	603x65x66	2200lm	0.88	6PCS
DB121A-1200-22W	22W	1203x65x66	2900lm	1.37	6PCS
DB121A-1200-38W	38W	1203x65x66	5000lm	1.37	6PCS
DB121A-1500-35W	35W	1503x65x66	4600lm	1.71	6PCS
DB121A-1500-58W	58W	1503x65x66	7600lm	1.71	6PCS
DB121A-1800-55W	55W	1803x65x66	7200lm	2.13	6PCS
DB121A-1800-70W	70W	1803x65x66	9000lm	2.13	6PCS
DB121B-600-17W	17W	603x65x66	2200lm	0.88	6PCS
DB121B-1200-22W	22W	1203x65x66	2900lm	1.37	6PCS
DB121B-1200-38W	38W	1203x65x66	5000lm	1.37	6PCS
DB121B-1500-35W	35W	1503x65x66	4600lm	1.71	6PCS
DB121B-1500-58W	58W	1503x65x66	7600lm	1.71	6PCS
DB121B-1800-55W	55W	1803x65x66	7200lm	2.13	6PCS
DB121B-1800-70W	70W	1803x65x66	9000lm	2.13	6PCS

CCT 3000K 4000K 5700K

Finish White

Installation accessories



Suspension kit
ACC-DB121-0201

SIMPLE DISASSEMBLE MODULAR DESIGN

LED BATTEN SERIES DB121

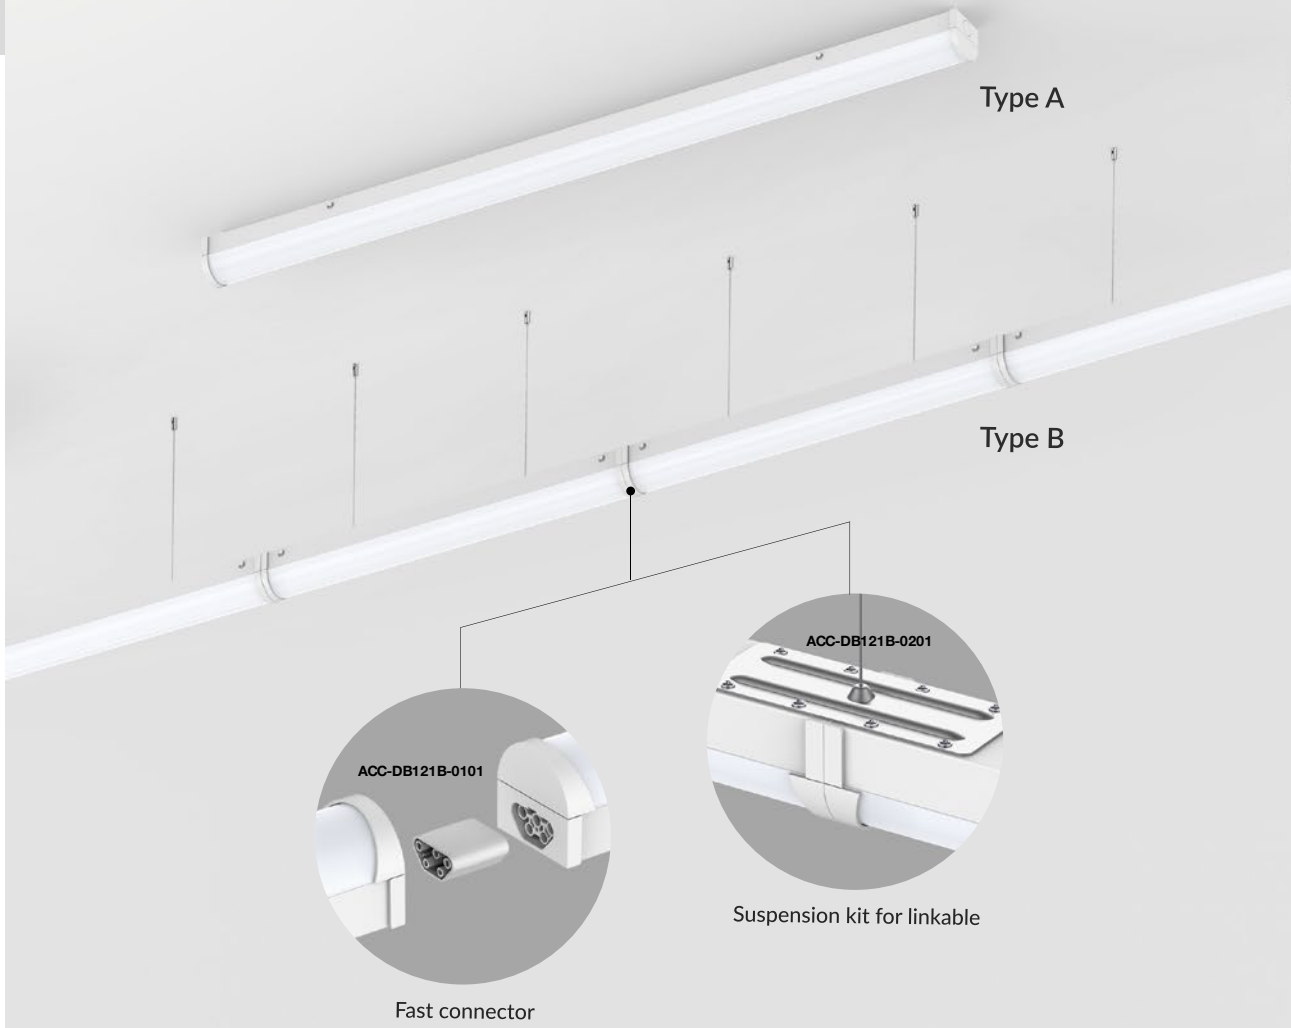



DB49

Batten



DB49 is a full size slim ba en with uniform light and excellent heat dissipation,ado ting high lumen SMD LED and internal driver. CCT changeable by adjusting the slide switch. Easier installation without installing bracket.

Materials of Housing : Aluminium
Materials of Optics : PC



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB49A-600-20W	20W	600X80X34	2300lm	0.60	10PCS
DB49A-900-30W	30W	900X80X34	3500lm	0.86	10PCS
DB49A-1200-35W	35W	1200X80X34	3950lm	1.12	10PCS
DB49A-1500-40W	40W	1500X80X34	4500lm	1.40	6PCS
DB49B-600-25W	25W	600X124X42	2950lm	0.84	10PCS
DB49B-900-35W	35W	900X124X42	4300lm	1.25	10PCS
DB49B-1200-45W	45W	1200X124X42	5600lm	1.67	10PCS
DB49B-1500-50W	50W	1500X124X42	5650lm	2.00	6PCS

CCT — 3000K 4000K 5700K

Finish — White Black





DB199
Batten

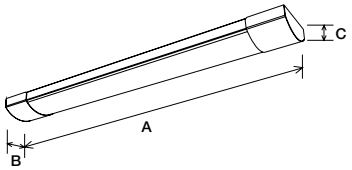

DB199 is a recessed ba en light, which adopts high lumen SMD and internal driver . It can also support interchangeable CCT&power.

Materials of Housing : PC
Materials of Optics : PC



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB199-600-18W	18W	600x82x35	2160lm	0.60	10PCS
DB199-1200-40W	40W	1200x82x35	4800lm	0.90	10PCS

CCT — 3000K 4000K 5700K

Finish — White



DB124
Batten



DB124 is a compact design, it adopts 2835 SMD chip to create a high light output. 130 degrees large lighting a ea and multiple functions,l e CCT changeable, microwave sensor available. Installation: pendant/surface mounted.

Materials of Housing : PC/SPCC
Materials of Optics : PC

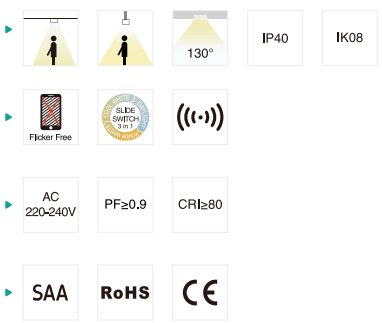

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB124-600-20W	20W	600x124x60	1900lm	1.18	6PCS
DB124-1200-38W	38W	1200x124x60	3800lm	2.14	6PCS
DB124-1500-50W	50W	1500x124x60	5000lm	2.71	6PCS
DB124-1500-60W	60W	1500x124x60	6000lm	2.71	6PCS

CCT — 3000K 4000K 5700K

Finish — White

Installation accessories — Suspension kit



DB74
Batten



DB74 ba en light is a compact design, it adopts high lumen 2835 SMD chip and flicker free branded driver ensure a long lifespan.Screwless design on back side with be er looking, large lighting a ea with high lumen efficien . It's a great option or various applications

Materials of Housing : IRON
Materials of Optics : PC

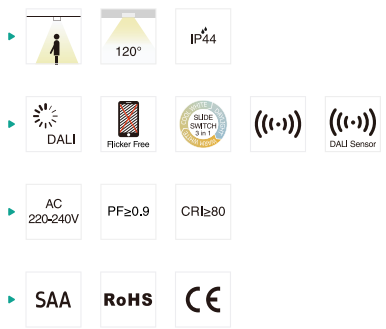

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB74-600-17W	17W	595x171x63	1870lm	1.55	12PCS
DB74-1200-30W	30W	1195x171x63	3500lm	2.88	6PCS
DB74-1500-36W	36W	1495x171x63	4250lm	3.52	6PCS
DB74-1500-50W	50W	1495x171x63	6000lm	3.52	6PCS

CCT — 3000K 4000K 5700K

Finish — White

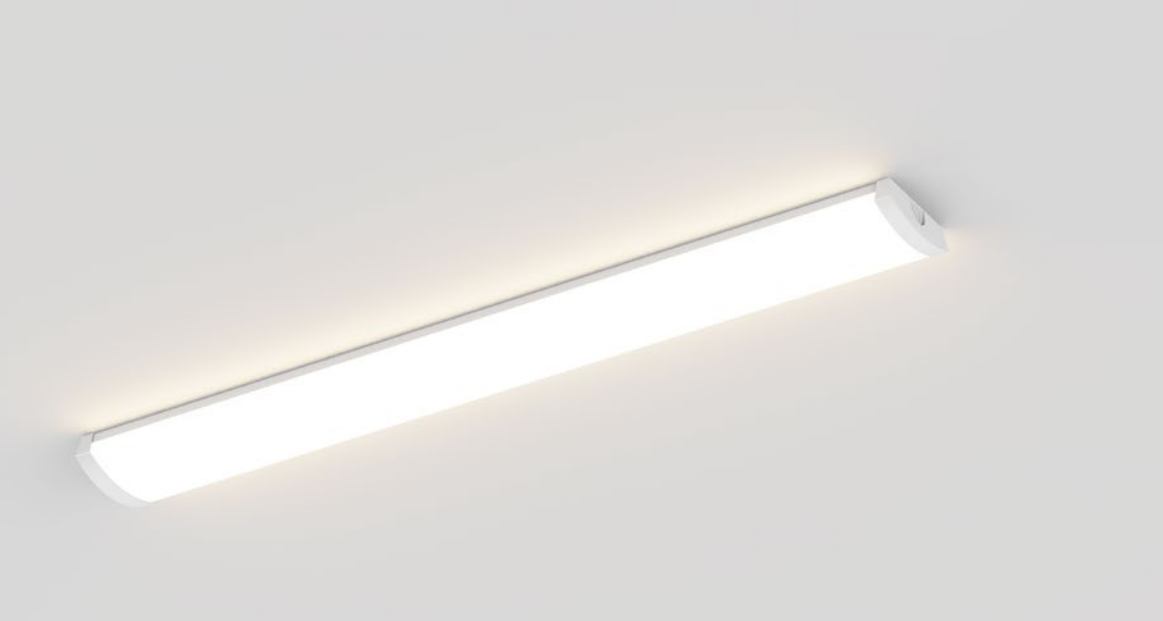

DB175
Batten



DB175 is a slim ba en light with big lighting a ea, available with 3CCT, DALI dim, emergency, and sensor function. igh lumen efficien 130lm/W and 160lm/W.

Materials of Housing : PC
Materials of Optics : PC



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB175-600-20W	20W	600x148x50	2600lm	1.10	12PCS
DB175-1200-40W	40W	1200x148x50	5200lm	2.00	6PCS
DB175-1500-55W	55W	1500x148x50	7150lm	2.40	6PCS
DB175-600-20W	20W	600x148x50	3200lm	1.10	12PCS
DB175-1200-40W	40W	1200x148x50	6400lm	2.00	6PCS
DB175-1500-55W	55W	1500x148x50	8800lm	2.40	6PCS

CCT — 3000K 4000K 5700K

Finish — White



DB106B

Batten



DB106B ba en light is a compact design with internal branded flic er free driver. Screwless design on back side with be er looking, large lighting a ea with high lumen efficien . It supports emergency, microwave sensor, CCT adjustable and DALI dim.



Materials of Housing : SPCC/PC
Materials of Optics : PC

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB106B-600-20W	20W	600x207x80	2300lm	1.40	4PCS
DB106B-1200-20W	20W	1200x207x80	2400lm	2.60	2PCS
DB106B-1200-40W	40W	1200x207x80	4800lm	2.60	2PCS
DB106B-1500-30W	30W	1500x207x80	3800lm	3.30	2PCS
DB106B-1500-58W	58W	1500x207x80	7000lm	3.30	2PCS

CCT — 3000K 4000K 5700K

Finish — White Black





DB128

Trunking System



DB128 LED Linear Track Light adopts high lumen SMD and internal driver. its separated module design can support a fl xible installation. or track, 5-wire/8-wire/12-wire selectable, splicing with L/T/X node connector and di erent entry hole. Power selectable by dip switch. DALI dimming, Emergency, Sensor for more appolication demands. ultifit or Surface mounting, steel wire suspension, rod suspension and chain suspension.

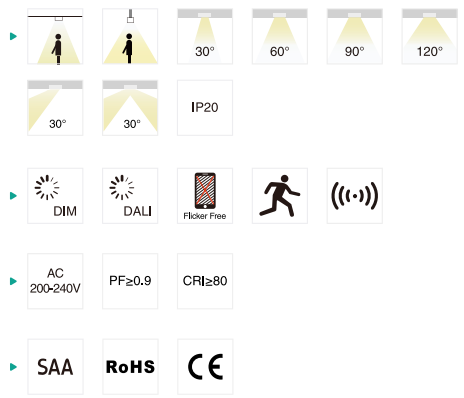

Materials of Housing : Steel
Materials of Optics : PMMA

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/ pc(kgs)	Q'ty/ CTN
DB128A-1500-40W-A4	28W/33W/36W/40W	1498x71.4x71.5	6150lm/7050lm/7500lm/8400lm	2.00	4PCS
DB128A-1500-60W-A4	45W/50W/55W/60W	1498x71.4x71.5	9550lm/10550lm/11550lm/12550lm	2.00	4PCS
DB128A-1500-74W-A3	62W/68W/74W	1498x71.4x71.5	12200lm/13600lm/14650lm	2.00	4PCS
DB128B-1500-40W-A4	28W/33W/36W/40W	1498x71.4x86.5	4400lm/5150lm/5500lm/6000lm	1.50	4PCS
DB128B-1500-60W-A4	45W/50W/55W/60W	1498x71.4x86.5	7050lm/7700lm/8300lm/8900lm	1.50	4PCS
DB128B-1500-74W-A3	62W/68W/74W	1498x71.4x86.5	9350lm/10200lm/10500lm	1.50	4PCS

CCT 3000K 4000K 5700K

Finish White

Installation accessories Surface mounted kit



LED LINEAR LIGHTING SYSTEM

Separated module design with track, linear light and functional modules

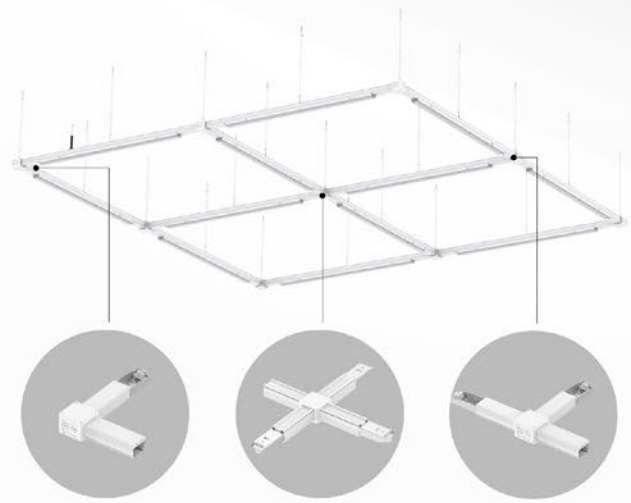

Suspension kit





DB145

Vapor proof



DB145 adpots high quality LED ba en with high luminous e cacy 150lm/w,and icker free driver. With a reliable and robust housing structure (IK08 & IP65), this maximizes the endurance and contributes to its long lifetime. With its fl xible installation a cessories, it can be installed for surface mount, pendant and splicing installation ways. 1200mm, 1500mm, 1800mm are available, it's an ideal replacement for traditional flu escent ba en.

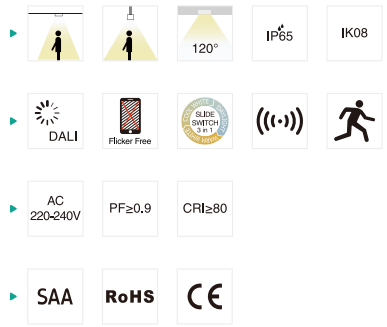

Materials of Housing : PC
Materials of Optics : PC

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB145-1200-38W	38W	1200x77x69	5700lm	1.70	6PCS
DB145-1500-52W	52W	1500x77x69	8000lm	2.10	6PCS
DB145-1500-68W	68W	1500x77x69	9800lm	2.10	6PCS
DB145-1800-68W	68W	1800x77x69	10000lm	2.30	6PCS

CCT — 3000K 4000K 5700K

Finish — White

Installation accessories — Suspension kit







TRP12

Vapor proof



TRP12 LED tri-proof ba en series adopts high lumen SMD to achieve 120lm/W. It is with width 89mm, IP65 waterproof and IK08 rating or special application. t can be two installations as sur ace mounted and suspended. Multiple functions: terchangeable power, emergency and microwave sensor.

Materials of Housing : PC
Materials of Optics : PC



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TRP12-600-20W-A4	20W/18W/15W/12W	650x89x70	2450lm	0.80	8PCS
TRP12-1200-40W-A4	40W/35W/30W/25W	1260x89x70	5120lm	1.40	8PCS
TRP12-1500-60W-A4	60W/55W/45W/35W	1560x89x70	7800lm	1.70	6PCS
TRP12-1800-72W-A4	72W/60W/55W/45W	1824x89x70	9300lm	2.00	6PCS

CCT — 3000K 4000K 5700K

Finish — White

Installation accessories — Suspension kit



TRP13

Vapor proof



TRP13 LED tri-proof ba en series adopts high lumen SMD to achieve 120lm/W and 150lm/W. q It is with width 125mm, IP65 waterproof and IK08 rating or special application. t can be Two installations as s rface mounted and suspended. Multiple functions: terchangeable power, emergency and microwave sensor.

Materials of Housing : PC
Materials of Optics : PC



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TRP13-600-20W	20W	680x125x86	120lm/w	1.00	6PCS
TRP13-600-30W	30W	680x125x86	120lm/w	1.00	6PCS
TRP13-600-30W-A4	17W/21W/26W/30W	680x125x86	120lm/w	1.00	6PCS
TRP13-1200-30W	30W	1280x125x86	120lm/w	1.80	6PCS
TRP13-1200-50W	50W	1280x125x86	120lm/w	1.80	6PCS
TRP13-1200-50W-A4	28W/35W/42W/50W	1280x125x86	120lm/w	1.80	6PCS
TRP13-1500-30W	30W	1580x125x86	120lm/w	2.20	6PCS
TRP13-1500-60W	60W	1580x125x86	120lm/w	2.20	6PCS
TRP13-1500-60W-A4	34W/42W/51W/60W	1580x125x86	120lm/w	2.20	6PCS
TRP13-600-10W	10W	680x125x86	150lm/w	1.00	6PCS
TRP13-600-20W	20W	680x125x86	150lm/w	1.00	6PCS
TRP13-600-20W-A4	12W/14W/17W/20W	680x125x86	150lm/w	1.00	6PCS
TRP13-1200-20W	20W	1280x125x86	150lm/w	1.80	6PCS
TRP13-1200-40W	40W	1280x125x86	150lm/w	1.80	6PCS
TRP13-1200-40W-A4	22W/28W/34W/40W	1280x125x86	150lm/w	1.80	6PCS
TRP13-1500-30W	30W	1580x125x86	150lm/w	2.20	6PCS
TRP13-1500-60W	60W	1580x125x86	150lm/w	2.20	6PCS
TRP13-1500-60W-A4	34W/42W/51W/60W	1580x125x86	150lm/w	2.20	6PCS

CCT — 3000K 4000K 5700K

Finish — White

Installation accessories — Suspension kit



TRP06

Vapor proof



TRP06 adopts high lumen SMD chip and internal flic er free driver. With waterproof joint at both ends, it can be linkable. Special clip-on bracket design makes an easier installation. The installation angle is adjustable with di erent scales. A type as non-linkable, B type as linkable.

Materials of Housing : PC

Materials of Optics : PC

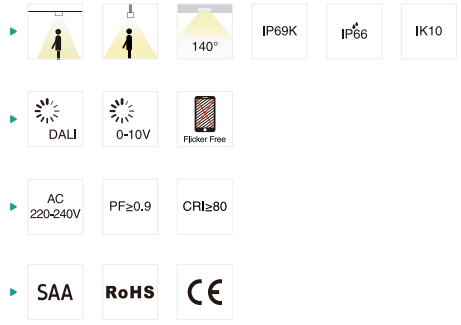

Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TRP06A-600-20W	20W	Ø75.2x600	2350lm	0.96	6PCS
TRP06A-1200-33W	33W	Ø75.2x1200	4150lm	1.65	6PCS
TRP06A-1500-45W	45W	Ø75.2x1500	5500lm	2.00	6PCS
TRP06B-600-20W	20W	Ø75.2x600	2350lm	0.96	6PCS
TRP06B-1200-33W	33W	Ø75.2x1200	4150lm	1.65	6PCS
TRP06B-1500-45W	45W	Ø75.2x1500	5500lm	2.00	6PCS

CCT — 3000K 4000K 5700K

Finish — White

Installation accessories — Suspension kit



WL143

LED Cornice Fitting

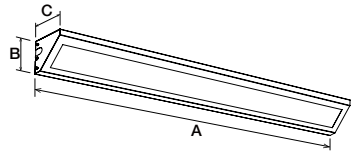

WL143 cornice luminaire gives a downward, angled light output. it has three cable entry holes on backward and knock hole in end cap which supports more possibility for di erent application cable connection

Materials of Housing : Iron

Materials of Optics : PC



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
WL143-1500-40W	40W	1460x110x110	4450lm	6.5	2PCS

CCT — 3000K 4000K 5700K

Finish — White

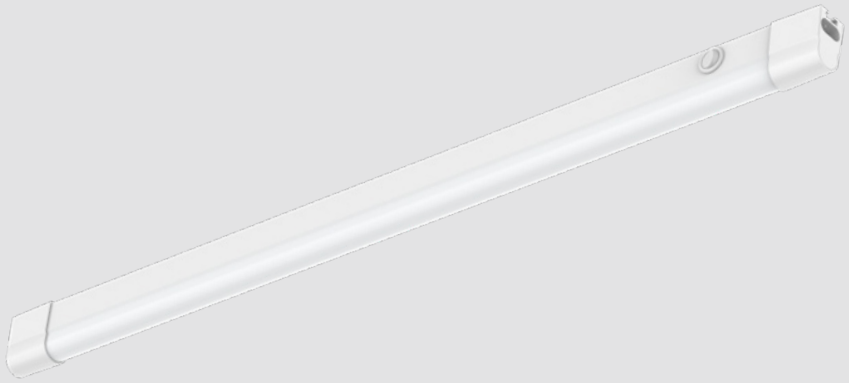

T5-S

Tube light



Integrated complete PC LED tube T5-S is a successful economic design. Adopt high lumen SMD LED as light source, full PC cover (pass 750C°glow-wire test) ensures high light transmittan e and safe installation. Changeable CCT and IP42 protection l vel also make it easier maintenance. Special installation: Surface mounted and wall mounted with di erent accessories. Linkable design with connect wires or connect accessories, which is suitable for a wider application

Materials of Housing : PC
Materials of Optics : PC



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
T5-5W355-S	5W	355x22.3x37.4	535m	0.18	50PCS
T5-8W600-S	8W	600x22.3x37.4	980lm	0.25	50PCS
T5-18W1200-S	18W	1200x22.3x37.4	2205lm	0.37	30PCS
T5-25W1500-S	25W	1500x22.3x37.4	3045lm	0.43	30PCS

CCT — 3000K 4000K 5700K

Cover — Frosted



T5-V

Tube light



This is an integrated T5 tube. It adopts 2835 SMD light source and CRI>80, combine with 94-V2 fi e-rated PC shade to ensure a high transmittan e and create a uniform light output. Besides, it is PC+Aluminium housing, which can realize high-e ciency lighting an good heat dissipation, with high cost performance through market.

Materials of Housing : Aluminium
Materials of Optics : PC



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
T5-5W-300-V	5W	278x23x35	550lm	0.26	50PCS
T5-8W-600-V	8W	570x23x35	960lm	0.3	50PCS
T5-12W-900-V	12W	878x23x35	1440lm	0.34	30PCS
T5-18W-1200-V	18W	1178x23x35	2160lm	0.4	30PCS
T5-23W-1500-V	23W	1478x23x35	2760lm	0.45	30PCS

CCT — 3000K 4000K 5700K

Finish — Silver Oxide

connect

IINNO Ltd
Unit 7, 8/F, Tower B
83 King Lam Street
Lai Chi Kok, Kowloon
Hong Kong
Tel: +86 (0)769 2301 0151 / 2
Email: sales@iinno-lighting.com
Web: www.iinno-lighting.com

iinno lighting