iinno lighting

Commercial Residential Decorative

iinno Lighting delivers certified, high-performance solutions for commercial, municipal, and industrial use, trusted by developers worldwide for quality, scale, and long-term reliability.

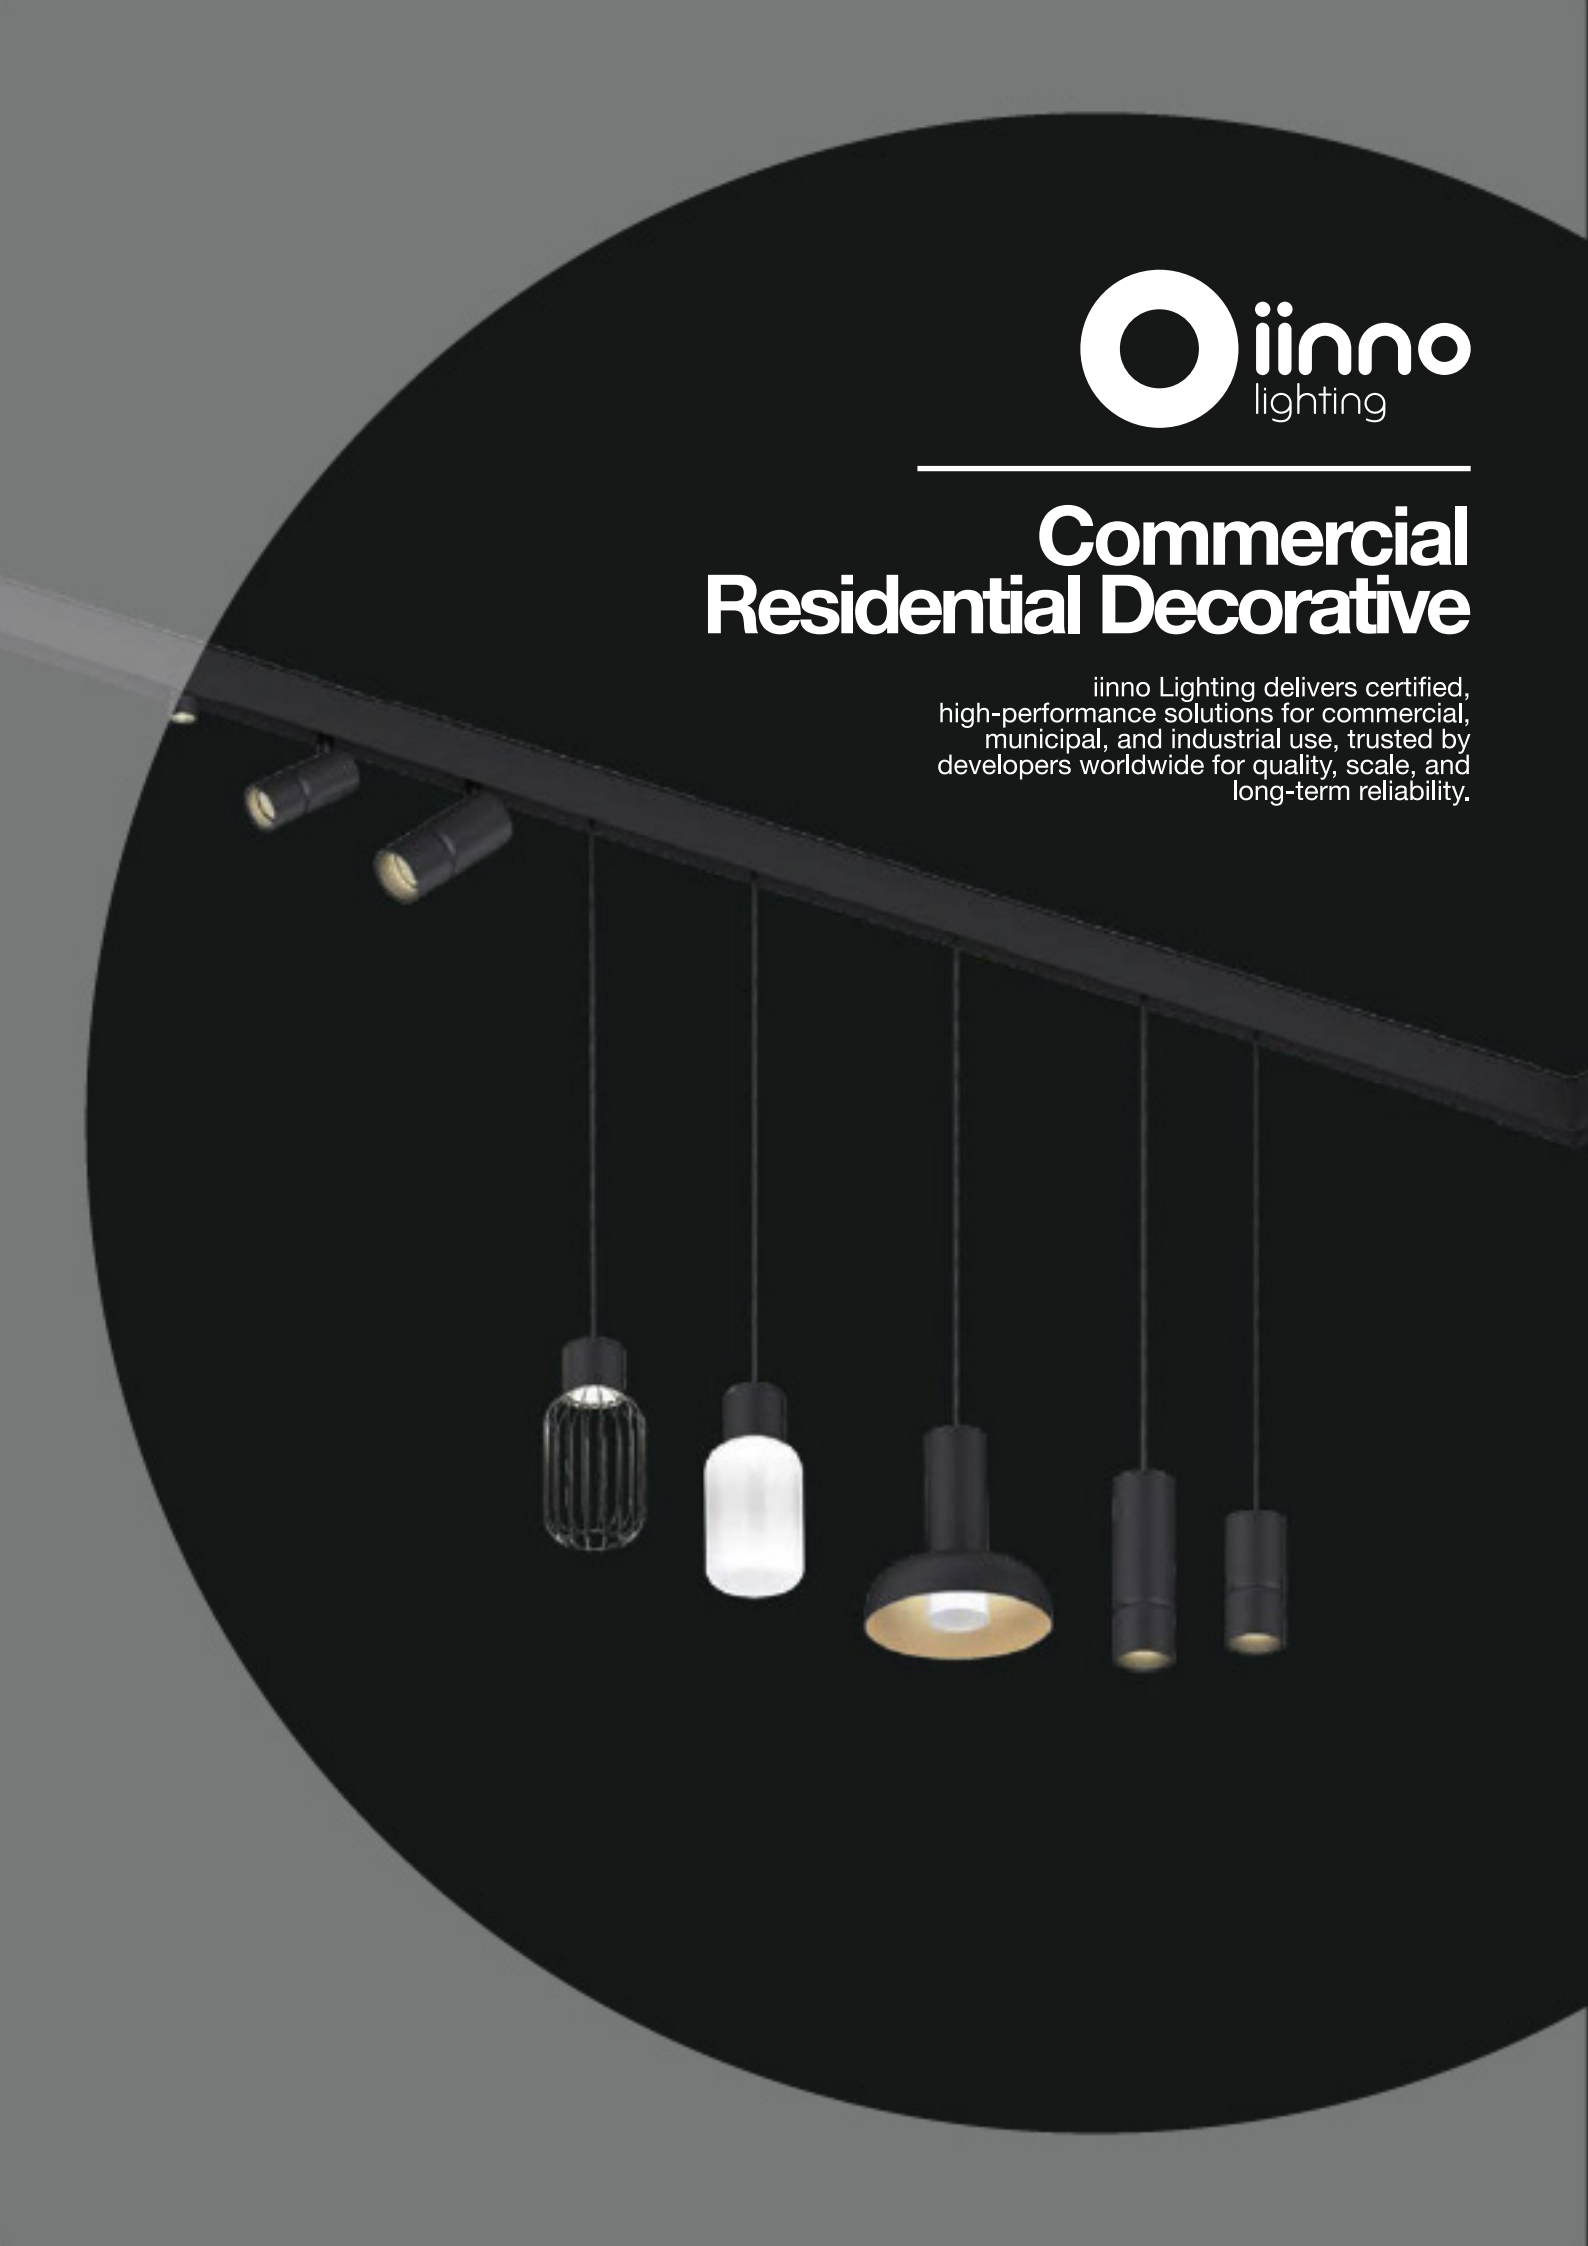



48V TRACK PRODUCT MEET LOTUS

A new 48V low voltage luminaire range. It's modular, elegant and simple, reflecting European style while taking inspiration from the asian lotus flower. The products offer efficient, adjustable lighting for any setting. With LOTUS, experience the blend of form and funtion in a modern and straightforward design that illuminates your space sustainably and stylishly.

Discover all range of 48V track system: full safety of the low votalge, easy and efficient installation, elegant design etc.

Full range of designs from pendant long/bowl, flat, pendant glass, pendant deco, spot, linear spot, and linear for various applications.



DC-PD142-50117-12W



Power	12W
Light flux	850lm
Beam angle	24°/36°/50°
Color rendering	90
Color temp.	2700K/3000K/4000K

Finishes

DC-PD142-50117-12W (Bowl)



Power	12W
Light flux	1050lm
Beam angle	100°
Color rendering	90
Color temp.	2700K/3000K/4000K

Finishes



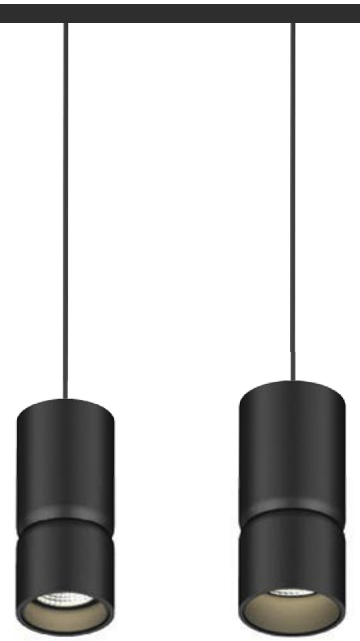

DC-PD142-4054-7W



Power	7W
Light flux	600lm
Beam angle	36°/45°/60°
Color rendering	90
Color temp.	2700K/3000K/4000K

Finishes



DC-PD142-5067-9W



Power	9W
Light flux	700lm
Beam angle	24°/36°/50°
Color rendering	90
Color temp.	2700K/3000K/4000K

Finishes





DC-PD142-5046-7W



Power	7W
Light flux	380lm/300lm
Beam angle	75°
Color rendering	90
Color temp.	2700K/3000K/4000K

Finishes



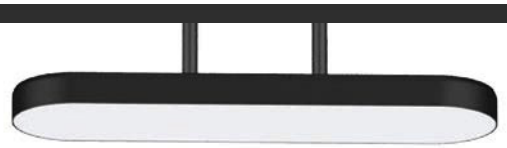

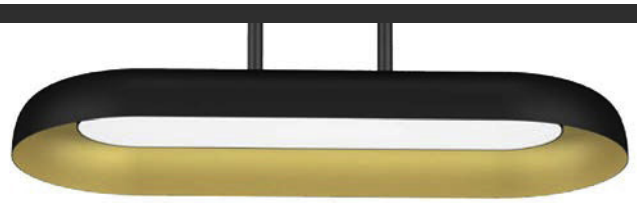

DC-TL142-3710-18W



Power	10W/14W/18W
Light flux	1000lm/1410lm/1820lm
Beam angle	110°
Color rendering	90
Color temp.	2700K/3000K/4000K

Finishes

DC-TL142-3710-18W(Pill)



Power	10W/14W/18W
Light flux	1000lm/1410lm/1820lm
Beam angle	110°
Color rendering	90
Color temp.	2700K/3000K/4000K

Finishes

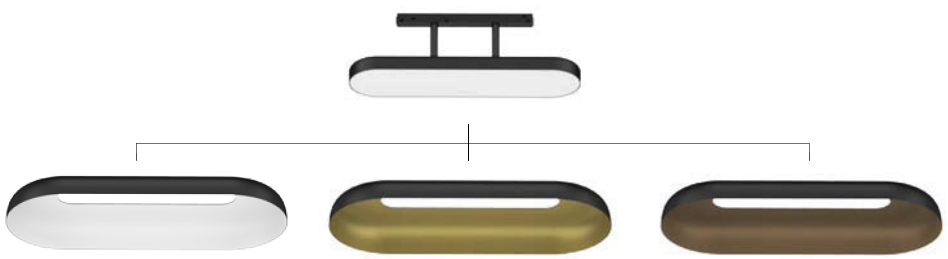



DC-TL142-12-18W



Power	10W/14W/18W
Light flux	1050lm/1480lm/1900lm
Beam angle	110°
Color rendering	90
Color temp.	2700K/3000K/4000K

Finishes





DC-TL142-4054-7W
DC-TL142-4054-14W



Power	7W/14W
Light flux	600lm/1200lm
Beam angle	36°/45°/60°
Color rendering	90
Color temp.	2700K/3000K/4000K

Finishes

DC-TL142-5067-9W
DC-TL142-5067-18W



Power	9W/18W
Light flux	700lm/1400lm
Beam angle	24°/36°/50°
Color rendering	90
Color temp.	2700K/3000K/4000K

Finishes





DC-TL142-2350-1.5W



Power	1.5W
Light flux	130lm
Beam angle	15°/24°/36°/45°
Color rendering	90
Color temp.	2700K/3000K/4000K

Finishes





DC-TL142A-120-8W



25

122

Power	8W
Light flux	560lm
Beam angle	20°/36°/45°
Color rendering	90
Color temp.	2700K/3000K/4000K

Finishes

DC-TL142A-230-16W



25

233

Power	16W
Light flux	1200lm
Beam angle	20°/36°/45°
Color rendering	90
Color temp.	2700K/3000K/4000K

Finishes

DC-TL142A-120-8W(tilt)



58

122

Power	8W
Light flux	560lm
Beam angle	20°/36°/45°
Color rendering	90
Color temp.	2700K/3000K/4000K

Finishes

DC-TL142A-230-16W(tilt)



58

233

Power	16W
Light flux	1200lm
Beam angle	20°/36°/45°
Color rendering	90
Color temp.	2700K/3000K/4000K

Finishes

DC-TL142B-120-8W



22.8

120

Power	8W
Light flux	560lm
Beam angle	100°
Color rendering	90
Color temp.	2700K/3000K/4000K

Finishes

DC-TL142B-230-16W



22.8

233

Power	16W
Light flux	1250lm
Beam angle	100°
Color rendering	90
Color temp.	2700K/3000K/4000K

Finishes

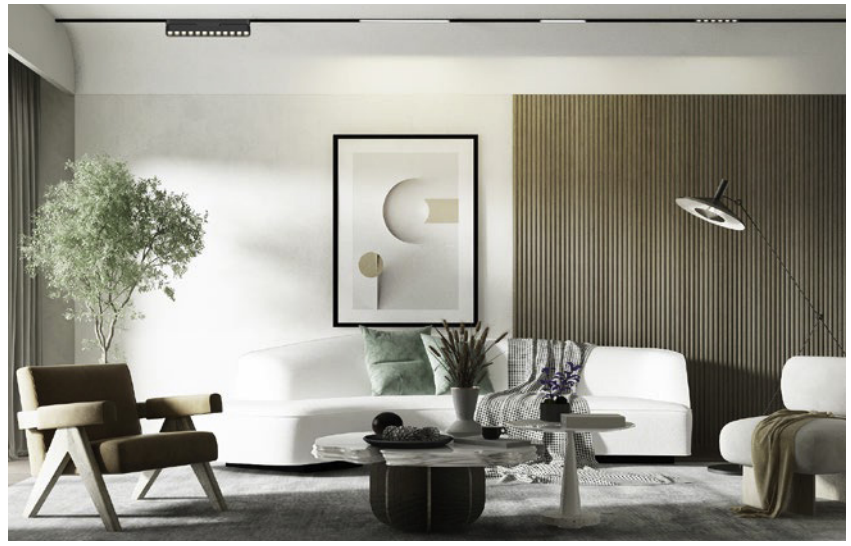





STANDARD TRACK

PRO-N110（1000mm）, PRO-N120（2000mm）,
PRO-N130（3000mm）, PRO-N140（4000mm）

Standard Version Track - Surface Mount / Pendant Mount



HIGH TRACK

PRO-DN110（1000mm）, PRO-DN120（2000mm）,
PRO-DN130（3000mm）, PRO-DN140（4000mm）

High Version of Track - Surface Mount / Pendant Mount



RECESSED TRACK

PRO-RN110（1000mm）, PRO-RN120（2000mm）,
PRO-RN130（3000mm）, PRO-RN140（4000mm）

Recessed Track - Recessed Mount

ACCESSORIES



PRO-N135FL
L-shape connector (L) - Standard Track System



PRO-N135FR
L-shape connector (R) - Standard Track System



PRO-N135FS
L-shape connector (Vertical)- Standard Track System

PRO-N132
End Cap - Standard Track System



PRO-N1SK
Reinforcement kit - Standard Track System



PRO-DN135FL
L-shape connector (L) - High Track System



PRO-DN135FR
L-shape connector (L) - High Track System



PRO-DN135FS
L-shape connector (Vertical) - High Track System

PRO-DN132
End Cap - High Track System



PRO-RN135FL
L-shape connector (L)
- Recessed Track



PRO-RN135FR
L-shape connector (R) - Recessed Track System



PRO-RN135FS
L-shape connector (Vertical) - Recessed Track System



PRO-RN132
End Cap - Recessed Track System



PRO-RNC01
Metal Strip

PRO-N131L
Live-end connector (Left)

PRO-N131R
Live-end connector (Right)



PRO-N131
Live-end connector (I)

PRO-N135
Live-end connector (L)

PRO-N139
Power Feeder (Flex)



PRO-EZN147
Ceiling Mount, EZClick suspension kit with 1m rod



PRO-EZN147
Ceiling Mount, EZClick suspension kit with 1.5m wire



PRO-N147
Ceiling mount reinforcement kit with 1m rod



PRO-N148
Ceiling mount reinforcement kit with 1.5m wire



PRO-N1SK
Mounting Clip



AL08B

LED ceiling light

LED SMD | Internal driver
PC | PC/ PC+PCR



AL08B-8-12W
AL08D-8-12W



AL08B-10-12W
AL08D-10-12W



AL08B-12-18W
AL08B-12-25W
AL08D-12-18W
AL08D-12-25W



AL08B-14-25W
AL08D-14-25W



AL08B-16-30W
AL08D-16-30W

Code	Voltage	Watt	Lumen(±5%)	Class
AL08B-8-12W	AC200-240V	12W	1300lm	II
AL08B-10-12W	AC200-240V	12W	1300lm	II
AL08B-12-18W	AC200-240V	18W	2060lm	II
AL08B-12-25W	AC200-240V	25W	2650lm	II
AL08B-14-25W	AC200-240V	25W	2900lm	II
AL08B-16-30W	AC200-240V	30W	3360lm	II
AL08D-8-12W	AC200-240V	12W	1200lm	II
AL08D-10-12W	AC200-240V	12W	1300lm	II
AL08D-12-18W	AC200-240V	18W	2130lm	II
AL08D-12-25W	AC200-240V	25W	2900lm	II
AL08D-14-25W	AC200-240V	25W	2790lm	II
AL08D-16-30W	AC200-240V	30W	3530lm	II

IP54 IP40 IK10

WH

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9 SUDE SWITCH 3 in 1 WIF Smart Lighting

Certification

SAA RoHS CE CB TÜVRheinland CERTIFIED

Accessories



ACC-AL08
Nickel Brushed
10"- 250mm / 12"- 300mm

AL12B

LED ceiling light

LED SMD | Internal driver
PC | PC/ PC+PCR



AL12B-10-12W
AL12D-10-12W



AL12B-12-18W
AL12B-12-25W
AL12D-12-18W
AL12D-12-25W



AL12B-14-25W
AL12D-14-25W



AL12B-16-30W
AL12D-16-30W

Code	Voltage	Watt	Lumen(±5%)	Class
AL12B-10-12W	AC200-240V	12W	1330lm	II
AL12B-12-18W	AC200-240V	18W	1995lm	II
AL12B-12-25W	AC200-240V	25W	2775lm	II
AL12B-14-25W	AC200-240V	25W	2775lm	II
AL12B-16-30W	AC200-240V	30W	3330lm	II
AL12D-10-12W	AC200-240V	12W	1380lm	II
AL12D-12-18W	AC200-240V	18W	2130lm	II
AL12D-12-25W	AC200-240V	25W	2900lm	II
AL12D-14-25W	AC200-240V	25W	2790lm	II
AL12D-16-30W	AC200-240V	30W	3530lm	II

IP54 IP40 IK10

WH

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9 SUDE SWITCH 3 in 1 WIF Smart Lighting

Certification

SAA RoHS CE CB TÜVRheinland CERTIFIED

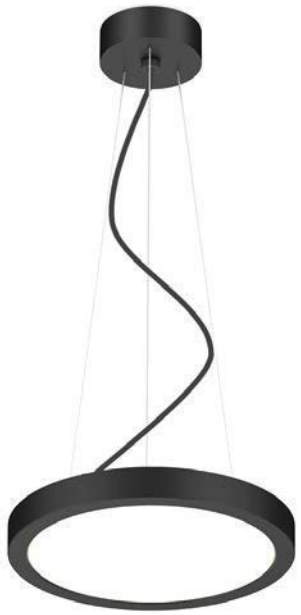

AL149

LED ceiling light



33mm

Ø250mm

AL149-10-12W

33mm

AL149-12-18W

Ø300mm



33mm

AL149-16-25W

Ø400mm

Code	Voltage	Watt	Lumen(±5%)	Class
AL149-10-12W	AC220-240V	12W	1100lm	II
AL149-12-18W	AC220-240V	18W	1600lm	II
AL149-16-25W	AC220-240V	25W	2150lm	II

LED SMD Internal driver
PC PMMA+PS

IP20

WH BK

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9

Certification

SAA RoHS CE

Accessories



ACC-AL149 Black



ACC-AL149 Wood Grain



ACC-AL149 Nickel Brushed

ACC-AL149-WT/ WD-0200

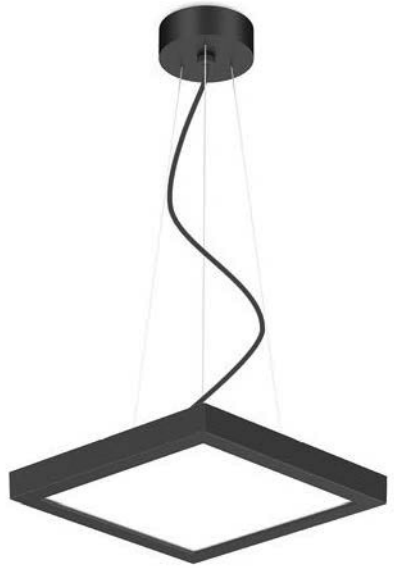

AL149B

LED ceiling light



AL149B-12-15W

Code	Voltage	Watt	Lumen(±5%)	Class
AL149B-12-15W	AC220-240V	15W	1750lm	II



LED SMD Internal driver
PC PMMA+PC

IP20

WH BK

Beam Angle

110°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9

Certification

SAA RoHS CE

Accessories



ACC-AL149B-12-BK



ACC-AL149B-12-WD



ACC-AL149B-12-NK



ACC-AL149-WT/BK/WD-0200

AL180

LED ceiling light

LED SMD | Internal driver
PC | PS



AL180-10-12W
AL180-10-12W-A3



AL180-12-18W
AL180-12-18W-A3



AL180-16-25W
AL180-16-22W-A3

Code	Voltage	Watt	Lumen(±5%)	Class
AL180-10-12W	AC220-240V	12W	1260lm	II
AL180-10-12W-A3	AC220-240V	8W/10W/12W	1350lm	II
AL180-12-18W	AC220-240V	18W	2180lm	II
AL180-12-18W-A3	AC220-240V	12W/15W/18W	1930lm	II
AL180-16-25W	AC220-240V	25W	2830lm	II
AL180-16-22W-A3	AC220-240V	16W/18W/22W	2550lm	II

IP54

WH

Beam Angle

110°

Light Source

CRI≥80

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9 SLIDE SWITCH 3 in 1 Adjustable Power

Certification

SAA RoHS CE



AL85

LED ceiling light

LED SMD | Internal driver
PP | PP



AL85-10-10W



AL85-12-18W



AL85-16-24W

Code	Voltage	Watt	Lumen(±5%)	Class
AL85-10-10W	AC200-240V	10W	1060lm	II
AL85-12-18W	AC200-240V	18W	1820lm	II
AL85-16-24W	AC200-240V	24W	2600lm	II

IP54

WH

Beam Angle

110°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9 SLIDE SWITCH 3 in 1 WIF Smart Lighting

Certification

SAA RoHS CE

Accessories



ACC-AL85
Nickel Brushed



AL181

LED ceiling light

LED SMD | Internal driver
PC | PC



69mm

Ø250mm

AL181-10-12W



71mm

Ø300mm

AL181-12-15W
AL181-12-20W

IP44 IP40 IP20

WH GD

Beam Angle

110°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9

Certification

SAA RoHS CE

Accessories



ACC-AL181-WT-0200

Code	Voltage	Watt	Lumen(±5%)	Class
AL181-10-12W	AC220-240V	12W	1400lm	II
AL181-12-15W	AC220-240V	15W	1720lm	II
AL181-12-20W	AC220-240V	20W	2300lm	II



AL200

LED ceiling light

LED SMD | Internal driver
PC | PC



AL200-11-10W
AL200-11-15W
AL200-11-18W



AL200-14-18W
AL200-14-25W
AL200-14-30W

IP54

WH

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM DALI Flicker Free PF≥0.9

SLIDE SWITCH 3 in 1 | Adjustable Power

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
AL200-11-10W	AC220-240V	10W	1200lm	II
AL200-11-15W	AC220-240V	15W	1800lm	II
AL200-11-18W	AC220-240V	18W	2160lm	II
AL200-14-18W	AC220-240V	18W	2160lm	II
AL200-14-25W	AC220-240V	25W	3000lm	II
AL200-14-30W	AC220-240V	30W	3600lm	II



AL191

LED ceiling light

LED SMD Internal driver
SPCC PC(Lens) +PMMA(Diffuser)



AL191-10-12W



AL191-13-18W



AL191-15-24W

IP44

WH

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9 SLIDE SWITCH 3 in 1

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
AL191-10-12W	AC220-240V	12W	1310lm	I
AL191-13-18W	AC220-240V	18W	1900lm	I
AL191-15-24W	AC220-240V	24W	2540lm	I



AL117

LED ceiling light

LED SMD | Internal driver
PC | PC



AL117-8-12W



AL117-11-12W
AL117-11-18W



AL117-14-25W

IP54

WH

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM DALI Flicker Free PF≥0.9

SLIDE SWITCH 3 in 1 | Adjustable Power

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
AL117-8-12W	AC200-240V	12W	1350lm	II
AL117-11-12W	AC200-240V	12W	1350lm	II
AL117-11-18W	AC200-240V	18W	1950lm	II
AL117-14-25W	AC200-240V	25W	2700lm	II



AL145

LED ceiling light

LED SMD | Internal driver
PC | PC



AL145-11-12W
AL145-11-18W



AL145-14-18W
AL145-14-25W

IP54

WH

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9

SLIDE SWITCH 3 in 1

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
AL145-11-12W	AC220-240V	12W	1350lm	II
AL145-11-18W	AC220-240V	18W	2100lm	II
AL145-14-18W	AC220-240V	18W	2120lm	II
AL145-14-25W	AC220-240V	25W	2940lm	II



AL87

LED ceiling light

LED SMD | Internal driver

PP



AL87-11-12W
AL87-11-18W
AL87-11-25W



AL87-14-25W
AL87-14-30W

Code	Voltage	Watt	Lumen(±5%)	Class
AL87-11-12W	AC200-240V	12W	1460lm	II
AL87-11-18W	AC200-240V	18W	2200lm	II
AL87-11-25W	AC200-240V	25W	3000lm	II
AL87-14-25W	AC200-240V	25W	2900lm	II
AL87-14-30W	AC200-240V	30W	3300lm	II

IP54

WH

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM DALI 0-10V Flicker Free

PF≥0.9 Adjustable Power

Certification

SAA RoHS CE



AL87B

LED ceiling light

LED SMD | Internal driver

PP | PP



AL87B-11-25W



AL87B-14-30W

Code	Voltage	Watt	Lumen(±5%)	Class
AL87B-11-25W	AC220-240V	25W	2800lm	II
AL87B-14-30W	AC220-240V	30W	3300lm	II

IP54

WH

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM DALI 0-10V Flicker Free

PF≥0.9

Certification

SAA RoHS CE



AL126

LED ceiling light



AL126-10-12W



AL126-12-18W
AL126-12-24W



AL126-16-24W
AL126-16-30W

LED SMD | Internal driver
PC | PMMA

IP54

WH

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
AL126-10-12W	AC220-240V	12W	1300lm	II
AL126-12-18W	AC220-240V	18W	2000lm	II
AL126-12-24W	AC220-240V	24W	2600lm	II
AL126-16-24W	AC220-240V	24W	2600lm	II
AL126-16-30W	AC220-240V	30W	3200lm	II



AL202

LED ceiling light



AL202-10-12W



AL202-12-18W
AL202-12-25W



AL202-16-25W
AL202-16-30W

LED SMD | Internal driver
PC | PC

IP54

WH

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM DALI Flicker Free PF≥0.9

Sensor Adjustable Power

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
AL202-10-12W	AC220-240V	12W	1300lm	II
AL202-12-18W	AC220-240V	18W	1900lm	II
AL202-12-25W	AC220-240V	25W	2700lm	II
AL202-16-25W	AC220-240V	25W	2700lm	II
AL202-16-30W	AC220-240V	30W	3200lm	II



AL203

LED ceiling light

LED SMD | Internal driver

PC | PC



AL203-10-12W



AL203-12-18W
AL203-12-25W



AL203-16-25W
AL203-16-30W

IP54 IP20

WH

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM DALI Flicker Free PF≥0.9

SLIDE SWITCH 3 in 1 Sensor

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
AL203-10-12W	AC220-240V	12W	1200lm	II
AL203-12-18W	AC220-240V	18W	1800lm	II
AL203-12-25W	AC220-240V	25W	1800lm	II
AL203-16-25W	AC220-240V	25W	2500lm	II
AL203-16-30W	AC220-240V	30W	3000lm	II



AL122

LED ceiling light

LED SMD | Internal driver

SPCC | PMMA



AL122-10-12W



AL122-12-16W



AL122-16-24W



AL122(Module)-10-12W



AL122(Module)-12-16W



AL122(Module)-16-24W

IP54

WH

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9

SLIDE SWITCH 3 in 1

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
AL122-10-12W	AC220-240V	12W	1250lm	I
AL122-12-16W	AC220-240V	16W	1650lm	I
AL122-16-24W	AC220-240V	24W	2350lm	I
AL122(Module)-10-12W	AC220-240V	12W	1650lm	I
AL122(Module)-12-16W	AC220-240V	16W	2150lm	I
AL122(Module)-16-24W	AC220-240V	24W	3200lm	I



AL47
LED ceiling light

LED SMD Internal driver
PC PC/ PC+PCR



53mm

Ø250mm

AL47-10-12W
AL47D-10-12W



58mm

Ø300mm

AL47-12-18W
AL47-12-25W
AL47D-12-18W
AL47D-12-25W



66mm

Ø400mm

AL47-16-25W
AL47-16-30W
AL47D-16-25W
AL47D-16-30W

IP54

WH

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9 SLIDE SWITCH 3 in 1 WIF Smart Lighting

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
AL47-10-12W	AC200-240V	12W	1200lm	II
AL47-12-18W	AC200-240V	18W	1900lm	II
AL47-12-25W	AC200-240V	25W	2560lm	II
AL47-16-25W	AC200-240V	25W	2550lm	II
AL47-16-30W	AC200-240V	30W	3020lm	II
AL47D-10-12W	AC200-240V	12W	1350lm	II
AL47D-12-18W	AC200-240V	18W	2100lm	II
AL47D-12-25W	AC200-240V	25W	2600lm	II
AL47D-16-25W	AC200-240V	25W	2900lm	II
AL47D-16-30W	AC200-240V	30W	3400lm	II



AL47 Square)
LED ceiling light

LED SMD Internal driver
PC PC/ PC+PCR



58mm

300mm 300mm

AL47(Square)-12-18W
AL47(Square)-12-25W



68mm

400mm 400mm

AL47(Square)-16-25W
AL47(Square)-16-30W

IP54

WH

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9 SLIDE SWITCH 3 in 1 WIF Smart Lighting

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
AL47(Square)-12-18W	AC200-240V	18W	1920lm	II
AL47(Square)-12-25W	AC200-240V	25W	2670lm	II
AL47(Square)-16-25W	AC200-240V	25W	2610lm	II
AL47(Square)-16-30W	AC200-240V	30W	3160lm	II





AL175

LED ceiling light

LED SMD Internal driver
PC(LED module)+Iron(Decorative ring) PC



93mm

Ø250mm

AL175-10-12W



93mm

Ø300mm

AL175-12-18W



93mm

Ø400mm

AL175-16-25W

Code	Voltage	Watt	Lumen(±5%)	Class
AL175-10-12W	AC220-240V	12W	1500lm	II
AL175-12-18W	AC220-240V	18W	2350lm	II
AL175-16-24W	AC220-240V	24W	3300lm	II

IP54 IP20

WH

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9 SUDE SWITCH 3 in 1 WIF Smart Lighting

Certification

SAA RoHS CE

Accessories



ACC-AL175-10/12/16-WT-50



ACC-AL175-10/12/16-WT-52



ACC-AL175-10/12/16-BK-51



ACC-AL149-WT/BK-0200

AL170

LED ceiling light

LED SMD | Internal driver
PC | PC



50mm

Ø300mm

AL170-12-18W



55mm

Ø400mm

AL170-16-18W
AL170-16-25W

Code	Voltage	Watt	Lumen(±5%)	Class
AL170-12-18W	AC220-240V	18W	1900lm	II
AL170-16-18W	AC220-240V	18W	1900lm	II
AL170-16-25W	AC220-240V	25W	2700lm	II



IP40

WH

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9

Certification

SAA RoHS CE



AL187

LED ceiling light

LED SMD Internal driver
PC(LED module) Polyester Fiber(Acoustic ring)



40mm

Ø300mm

AL187-12-10W
AL187-12-15W
AL187-12-18W

Code	Voltage	Watt	Lumen(±5%)	Class
AL187-12-10W	AC220-240V	10W	1300lm	II
AL187-12-15W	AC220-240V	15W	1800lm	II
AL187-12-15W	AC220-240V	18W	2200lm	II



IP40

WH

Beam Angle

110°

Light Source

CRI≥80

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9

Certification

SAA RoHS CE

Accessories



ACC-AL187-12-GR/GN/BU/BK-50



ACC-AL187-12-GR/GN/BU/BK-51



ACC-AL187-12-GR/GN/BU/BK-52



ACC-AL166-WT/BK-0200



AL148

LED SMD | Internal driver
PC | PC

LED ceiling light



52mm

Ø300mm

AL148-12-15W



52mm

Ø400mm

AL148-16-25W

IP40

WH

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM DALI Flicker Free PF≥0.9

Certification

SAA RoHS CE

Accessories



ACC-AL148-WT-0200

Code	Voltage	Watt	Lumen(±5%)	Class
AL148-12-15W	AC220-240V	15W	1580lm	II
AL148-16-25W	AC220-240V	25W	2620lm	II

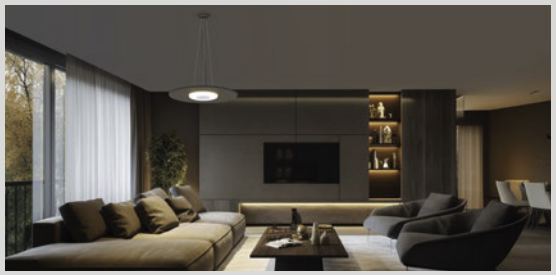



AL141

LED SMD | Internal driver
PC | PC

LED ceiling light



60mm

Ø300mm

AL141-12-12W
AL141-12-18W



60mm

Ø400mm

AL141-16-18W
AL141-16-25W

IP44 IP40

WH

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9

Certification

SAA RoHS CE

Accessories



ACC-AL141-WT-0200

Code	Voltage	Watt	Lumen(±5%)	Class
AL141-12-12W	AC220-240V	12W	1320lm	II
AL141-12-18W	AC220-240V	18W	1650lm	II
AL141-12-18W	AC220-240V	18W	1750lm	II
AL141-16-25W	AC220-240V	25W	2550lm	II

AL41A

LED ceiling light



AL41A-12-18W



AL41A-16-25W

LED SMD | Internal driver
PC | PC

IP54 IP40

WH

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9 SLIDE SWITCH 3 in 1 Adjustable Power

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
AL41A-12-18W	AC200-240V	18W	1710lm	II
AL41A-16-25W	AC200-240V	25W	2370lm	II

AL41B

LED ceiling light



AL41B-12-18W



AL41B-16-25W

LED SMD | Internal driver
PC | PC

IP54 IP40

WH

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9 SLIDE SWITCH 3 in 1 Adjustable Power

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
AL41B-12-18W	AC200-240V	12W	1710lm	II
AL41B-16-25W	AC200-240V	25W	2370lm	II



AL24A

LED ceiling light

LED SMD | Internal driver
PC | Aluminium



AL24A-12-18W
AL24A-12-25W



AL24A-16-35W

IP40

WH BK SR

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
AL24A-12-18W	AC200-240V	12W	1450lm	I
AL24A-12-25W	AC200-240V	25W	2000lm	I
AL24A-16-35W	AC200-240V	35W	3100lm	I



AL24B

LED ceiling light

LED SMD | Internal driver
PC | Aluminium



AL24B-12-18W
AL24B-12-25W



AL24B-16-35W

IP40

WH BK SR

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
AL24B-12-18W	AC200-240V	18W	1450lm	I
AL24B-12-25W	AC200-240V	25W	2000lm	I
AL24B-16-35W	AC200-240V	35W	3100lm	I



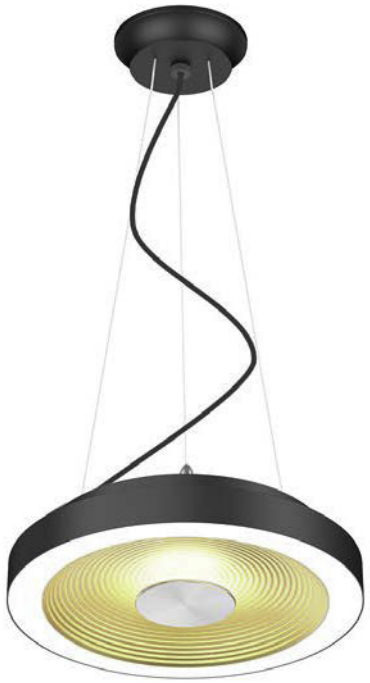

AL173

LED ceiling light



AL173-12-18W



AL173-16-25W

Code	Voltage	Watt	Lumen(±5%)	Class
AL173-12-18W	AC220-240V	18W	1200lm	II
AL173-16-25W	AC220-240V	25W	1750lm	II

LED SMD | Internal driver
PC | PC

IP54 IP20

WH BK GD

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9

Certification

SAA RoHS CE

Accessories



ACC-AL166-WT/
BK-0200





WL146

WALL LIGHT

LED SMD Internal driver
Aluminium PMMA



WL146-180-8W



WL146-240-10W



WL146-360-16W

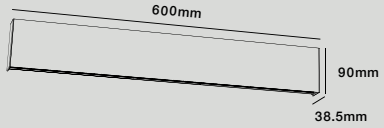

WL146-600-20W

Code	Voltage	Watt	Lumen(±5%)	Class
WL146-180-8W	AC220-240V	8W	1000lm	I
WL146-240-10W	AC220-240V	10W	1200lm	I
WL146-360-16W	AC220-240V	16W	1900lm	I
WL146-600-20W	AC220-240V	20W	2300lm	I

IP20

WH BK WG

Beam Angle

40°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9

Certification

SAA RoHS CE



WL102

WALL LIGHT

LED SMD Internal driver
Aluminium+PC PC



WL102-8W

Code	Voltage	Watt	Lumen(±5%)	Class
WL102-8W	AC220-240V	4.8+3.2W	770lm	I



IP20

WH BK

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9

Certification

SAA RoHS CE

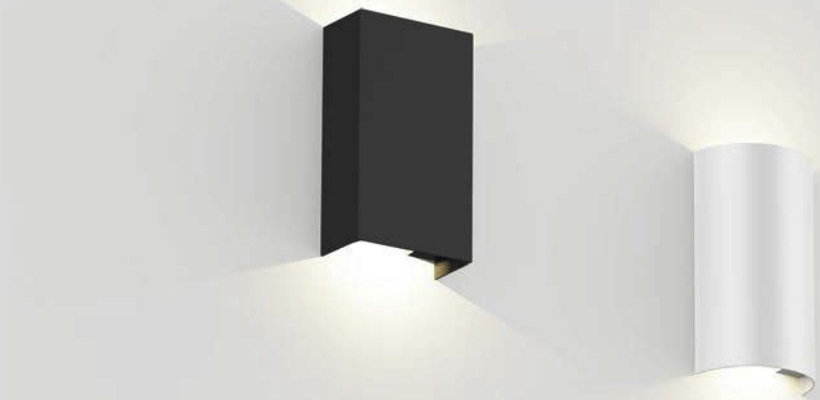

WL107

WALL LIGHT

LED SMD Internal driver
Aluminium PC



WL107A-5W
WL107A-8W



WL107B-5W
WL107B-8W

IP20

WH BK WG

Beam Angle

100°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
WL107A-5W	AC200-240V	2×2.5W	720lm	I
WL107A-8W	AC200-240V	2×4W	940lm	I
WL107B-5W	AC200-240V	2×2.5W	720lm	I
WL107B-8W	AC200-240V	2×4W	940lm	I



WL117

WALL LIGHT

LED SMD Internal driver
Aluminium PC



WL117-8W

IP20

WH BK SR GR

Beam Angle

110°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.88

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
WL117-8W	AC220-240V	5.5W+2.5W	700lm	I







WL106

WALL LIGHT

LED SMD Internal driver
Aluminium+PC PC



WL106-8W

IP20

WH BK

Beam Angle

160°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
WL106-8W	AC220-240V	2×4W	730lm	I

WL101

WALL LIGHT

LED SMD Internal driver
Aluminium+SPCCPC



WL101-8W

350° 28° IP20

WH

Beam Angle

90°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF Flicker Free PF≥0.9

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
WL101-8W	AC220-240V	2×4W	700lm	I





WL95

WALL LIGHT

LED SMD Internal driver
Aluminium PC



WL95-8W-C2
WL95-8W-P2

IP40

WH BK

Code	Voltage	Watt	Lumen(±5%)	Class
WL95-8W-C2	AC220-240V	8W	435lm	I
WL95-8W-P2	AC220-240V	8W	425lm	I

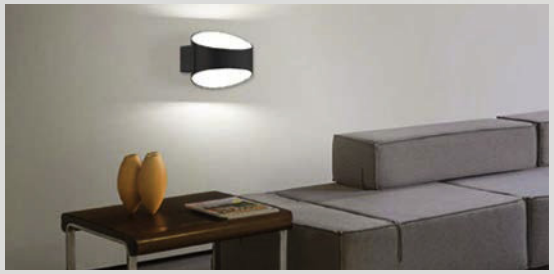

Beam Angle

360°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9

Certification

SAA RoHS CE





WL99

WALL LIGHT

LED SMD Internal driver
Aluminium PC



WL99-10W
WL99-10W-D

IP20

WH BK

Code	Voltage	Watt	Lumen(±5%)	Class
WL99-10W	AC100-240V	10W	750lm	I
WL99-10W-D	AC100-240V	10W	700lm	I

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF Flicker Free PF≥0.9

Certification

SAA RoHS CE





WL175A

WALL LIGHT LED SMD Internal driver
Aluminium PC



WL175A-680-34W
WL175A-680-50W



WL175A-980-50W
WL175A-980-60W



WL175A-1280-50W
WL175A-1280-60W

Code	Voltage	Watt	Lumen(±5%)	Class
WL175A-680-34W	AC220-240V	34W	4000lm	I
WL175A-680-50W	AC220-240V	50W	6000lm	I
WL175A-980-50W	AC220-240V	50W	6000lm	I
WL175A-980-60W	AC220-240V	60W	8000lm	I
WL175A-1280-50W	AC220-240V	50W	6000lm	I
WL175A-1280-60W	AC220-240V	60W	8000lm	I

IP44

WH

Beam Angle

90° 60°

Light Source

CRI≥90 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DALI Flicker Free PF≥0.95

Certification

SAA RoHS CE

WL175B

WALL LIGHT LED SMD Internal driver
Aluminium PC



WL175B-680-34W
WL175B-680-50W



WL175B-980-50W
WL175B-980-60W



WL175B-1280-50W
WL175B-1280-60W

Code	Voltage	Watt	Lumen(±5%)	Class
WL175B-680-34W	AC220-240V	34W	4000lm	I
WL175B-680-50W	AC220-240V	50W	6000lm	I
WL175B-980-50W	AC220-240V	50W	6000lm	I
WL175B-980-60W	AC220-240V	60W	8000lm	I
WL175B-1280-50W	AC220-240V	50W	6000lm	I
WL175B-1280-60W	AC220-240V	60W	8000lm	I

IP44

WH

Beam Angle

90° 60°

Light Source

CRI≥90 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DALI Flicker Free PF≥0.95

Certification

SAA RoHS CE





WL175C

WALL LIGHT LED SMD Internal driver
Aluminium PC



WL175C-680-34W
WL175C-680-50W



WL175C-980-50W
WL175C-980-60W



WL175C-1280-50W
WL175C-1280-60W

Code	Voltage	Watt	Lumen(±5%)	Class
WL175C-680-34W	AC220-240V	34W	4000lm	I
WL175C-680-50W	AC220-240V	50W	6000lm	I
WL175C-980-50W	AC220-240V	50W	6000lm	I
WL175C-980-60W	AC220-240V	60W	8000lm	I
WL175C-1280-50W	AC220-240V	50W	6000lm	I
WL175C-1280-60W	AC220-240V	60W	8000lm	I

IP44

WH

Beam Angle

90° 60°

Light Source

CRI≥90 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DALI Flicker Free PF≥0.95

Certification

SAA RoHS CE

WL170

WALL LIGHT LED SMD Internal driver
Aluminium PC



WL170-1200-20W

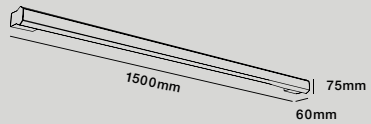

WL170-1500-25W



WL170-1800-28W

Code	Voltage	Watt	Lumen(±5%)	Class
WL170-1200-20W	AC220-240V	20W	2400lm	I
WL170-1500-25W	AC220-240V	25W	3000lm	I
WL170-1800-28W	AC220-240V	28W	3360lm	I

IP54

WH BK

Beam Angle

100°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9

Certification

SAA RoHS CE



WL173

WALL LIGHT LED SMD Internal driver
Aluminium PC



WL173-8W-D

IP20

WH BK

Code	Voltage	Watt	Lumen(±5%)	Class
WL173-8W-D	AC220-240V	8W	420lm	I

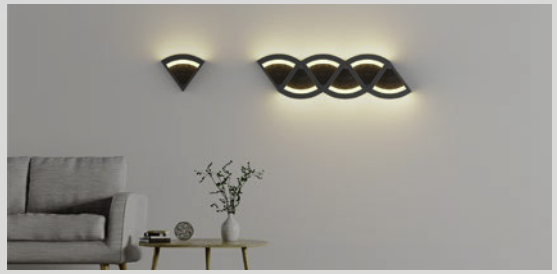

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.88

Certification

SAA RoHS CE



WL122

WALL LIGHT LED SMD Internal driver
Aluminium PC



WL122-8W

IP40

WH BK

Code	Voltage	Watt	Lumen(±5%)	Class
WL122-8W	AC100-240V	8W	870lm	I



Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF Flicker Free PF≥0.9

Certification

SAA RoHS CE





WL126

WALL LIGHT LED SMD Internal driver
Aluminium PC



WL126A-3W



WL126B-3W

IP20

WH BK

Beam Angle

60°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF Flicker Free PF≥0.4

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
WL126A-3W	AC220-240V	3W	98lm(BK)/155lm(WH)	I
WL126B-3W	AC220-240V	3W	90lm(BK)/155lm(WH)	I

WL141

WALL LIGHT LED SMD Internal driver
Aluminium PC



WL141A-12W
WL141B-12W



WL141A-15W
WL141B-15W

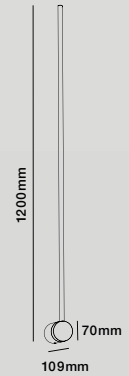

WL141A-20W
WL141B-20W

Code	Voltage	Watt	Lumen(±5%)	Class
WL141A-12W	AC220-240V	12W	1190lm	I
WL141A-15W	AC220-240V	15W	1550lm	I
WL141A-20W	AC220-240V	20W	2100lm	I
WL141B-12W	AC220-240V	12W	1170lm	I
WL141B-15W	AC220-240V	15W	1550lm	I
WL141B-20W	AC220-240V	20W	2100lm	I

IP20 350°

WH BK

Beam Angle

120°

Light Source

CRI≥80 CRI≥90 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF Flicker Free PF≥0.85 PF≥0.9

Certification

SAA RoHS CE



WL134

WALL LIGHT LED SMD Internal driver
Aluminium PC/PC+PMMA

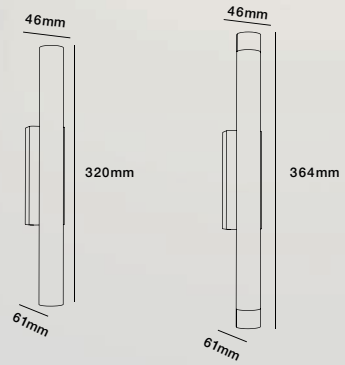

WL134A-4W

WL134B-4W

IP20

WH BK

Beam Angle

20° 40°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF Flicker Free

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
WL134A-4W	AC220-240V	4W	510lm	I
WL126B-3W	AC220-240V	3W	450lm	I



WL100

WALL LIGHT LED COB Internal driver
Aluminium PC



WL100A-5W-D



WL100B-10W-D



WL100C-5W-D

Ø68-Ø75mm

IP20 UGR<19

WH BK

Beam Angle

24° 36° 60°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
WL100A-5W-D	AC220-240V	5W	600lm	I
WL100B-10W-D	AC220-240V	10W	1100lm	I
WL100C-5W-D	AC220-240V	5W	600lm	I



WL109

WALL LIGHT LED SMD Internal driver
Aluminium+PC PC



WL109-4W

180° IP20

WH BK

Beam Angle

100°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.85

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
WL109-6-4W	AC220-240V	4W	550lm	I





WL109

WALL LIGHT LED SMD External driver
Aluminium ADC12 Glass

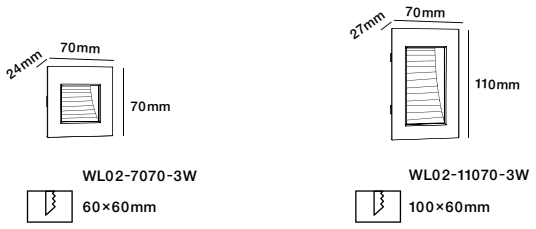

WL02-7070-3W
60×60mm

WL02-11070-3W
100×60mm



WL02-20070-3W
190×60mm



WL02-200135-8W
190×125mm

IP54

WH BK

Beam Angle

60°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF Flicker Free PF≥0.5

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
WL02-7070-3W	AC100-240V	3W	220lm	II
WL02-11070-3W	AC100-240V	3W	220lm	II
WL02-20070-3W	AC100-240V	3W	220lm	II
WL02-200135-8W	AC100-240V	8W	580lm	II



WL161

WALL LIGHT LED SMD Internal driver
Aluminium PC



DC-WL161A-3W
DC-WL161B-3W
WL161A-3W
WL161B-3W

Ø45mm

Code	Voltage	Watt	Lumen(±5%)	Class
DL-WL161A-3W	DC12V	3W	220lm	III
DC-WL161B-3W	DC12V	3W	200lm	III
WL161A-3W	AC220-240V	3W	220lm	II
WL161B-3W	AC220-240V	3W	200lm	II



IP54

WH BK

Beam Angle

30° Asymmetric 30°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF Flicker Free PF≥0.5

Certification

SAA RoHS CE

Accessories



ACC-WL161-WT/BK-01
ACC-WL161-WT/BK-02
ACC-WL161-WT/BK-03
ACC-WL161-WT/BK-04
ACC-WL161-WT/BK-05
ACC-WL161-WT/BK-06



WL124

WALL LIGHT

LED SMDInternal driver
PCPC



WL124A-1W
WL124A-2W



WL124B-1W
WL124B-2W

Code	Voltage	Watt	Lumen(±5%)	Class
WL124A-1W	AC200-240V	1W	40lm	II
WL124A-2W	AC200-240V	2W	80lm	II
WL124B-1W	AC200-240V	1W	40lm	II
WL124B-2W	AC200-240V	2W	80lm	II

IP44

WH

Beam Angle

80° 90°

Light Source

CRI≥90 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF Flicker Free PF≥0.35 Sensor

Certification

SAA RoHS CE



WL136

BED LIGHT

LED SMD Internal driver
Die-casting Aluminium+PC



WL136-3W

330° 90° IP20

WH BK

Beam Angle

45°

Light Source

CRI≥80 SDCM<6



Contact details



WL127

BED LIGHT LED SMD Internal driver
Aluminium PC



WL127A-3W



WL127C-3W



WL127B-3W



WL127D-3W

Code	Voltage	Watt	Lumen(±5%)	Class
WL127A-3W	AC220-240V	3W	260lm	I
WL127B-3W	AC220-240V	3W	260lm	I
WL127C-3W	AC220-240V	3W	260lm	I
WL127D-3W	AC220-240V	3W	260lm	I

IP20

WH

Beam Angle

50°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF Flicker Free PF≥0.4

Certification

SAA RoHS CE



WL135

BED LIGHT LED SMD Internal driver
Die-casting Aluminium+PC PC



WL135A-3W-T



WL135B-3W-T

Code	Voltage	Watt	Lumen(±5%)	Class
WL135A-3W-T	AC220-240V	17W	280lm	I
WL135B-3W-T	AC220-240V	17W	280lm	I



IP20

WH

Beam Angle

50°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF Flicker Free PF≥0.9

Certification

SAA RoHS CE

Accessories

ACC-WL135-WT-0000



WL68

BED LIGHT LED SMD Internal driver
Aluminium+PC PC



WL68-9W
WL68-9W-T

IP40

WH BK

Beam Angle

30°

Light Source

CRI≥80 CRI≥90

2700K 3000K 4000K

Gear

ON/OFF Flicker Free PF≥0.9

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
WL68-9W	AC200-240V	9W	650lm	I
WL68-9W-T	AC200-240V	9W	650lm	I





WL69

BED LIGHT LED SMD Internal driver
Iron+PC



WL69A-5W-D



WL69B-5W-D

IP20

WH BK

Beam Angle

36°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF Flicker Free PF≥0.9

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
WL69A-5W-D	AC220-240V	5W	420lm	II
WL69B-5W-D	AC220-240V	5W	420lm	II



ML25

MIRROR LIGHT LED SMD Internal driver
Aluminium+PC PC



ML25-600-8W



ML25-900-10W

IP44

WH SR

Beam Angle

140°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF Flicker Free PF≥0.9

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
ML25-600-8W	AC220-240V	8W	850lm	I
ML25-900-10W	AC220-240V	10W	1150lm	I



ML15

MIRROR LIGHT LED SMD Internal driver
Aluminium+PC PC



ML15-450-8W



ML15-600-10W

IP44

WH BK

Beam Angle

140°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF Flicker Free PF≥0.9

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
ML15-450-8W	AC200-240V	8W	880lm	I
ML15-600-10W	AC200-240V	10W	1200lm	I



ML26A

MIRROR LIGHT LED SMD Internal driver
Aluminium PC



ML26A-450-5W



ML26A-555-8W
ML26A-555-10W



ML26A-855-8W
ML26A-855-12W

IP44

WH CH

Beam Angle

175°x110°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9 SLIDE SWITCH 3 in 1 Sensor

Certification

SAA RoHS CE CB

Code	Voltage	Watt	Lumen(±5%)	Class
ML26A-450-5W	AC220-240V	5W	700lm	I
ML26A-555-8W	AC220-240V	8W	1200lm	I
ML26A-555-10W	AC220-240V	10W	1400lm	I
ML26A-855-8W	AC220-240V	8W	1200lm	I
ML26A-855-12W	AC220-240V	12W	1700lm	I



ML26B

MIRROR LIGHT LED SMD Internal driver
Aluminium PC



ML26A-495-5W



ML26A-600-8W
ML26A-600-10W

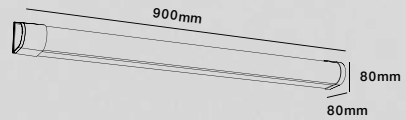

ML26A-900-8W
ML26A-900-12W

IP44

WH CH

Beam Angle

175°x110°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9 SLIDE SWITCH 3 in 1 Sensor

Certification

SAA RoHS CE CB

Code	Voltage	Watt	Lumen(±5%)	Class
ML26B-495-5W	AC220-240V	5W	700lm	I
ML26B-600-8W	AC220-240V	8W	1200lm	I
ML26B-600-10W	AC220-240V	10W	1400lm	I
ML26B-900-8W	AC220-240V	8W	1200lm	I
ML26B-900-12W	AC220-240V	12W	1700lm	I



ML13

MIRROR LIGHT LED SMD Internal driver
PCPC



ML13-480-8W



ML13-600-10W



ML13-900-15W

IP44

WH BK

Beam Angle

150°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF Flicker Free PF≥0.9

Certification

SAA RoHS CE CB

Code	Voltage	Watt	Lumen(±5%)	Class
ML13-480-8W	AC200-240V	8W	1010lm	II
ML13-600-10W	AC200-240V	10W	1270lm	II
ML13-900-15W	AC200-240V	15W	1900lm	II



ML28

MIRROR LIGHT LED SMD Internal driver
Aluminium PC



ML28-600-15W



ML28-900-20W



ML28-1200-30W



ML28-1500-35W

IP44

WH

Beam Angle

150°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF Flicker Free PF≥0.9

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
ML28-600-15W	AC220-240V	15W	1900lm	I
ML28-900-20W	AC220-240V	20W	2600lm	I
ML28-1200-30W	AC220-240V	30W	3700lm	I
ML28-1500-35W	AC220-240V	35W	4200lm	I





ML32A

MIRROR LIGHT LED SMD Internal driver
PCPC



ML32A-500-8W



ML32A-800-12W



ML32A-1000-20W

IP54

WH

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF Flicker Free PF≥0.9

Certification

SAA RoHS CE CB

Code	Voltage	Watt	Lumen(±5%)	Class
ML32A-500-8W	AC220-240V	8W	890lm	II
ML32A-800-12W	AC220-240V	12W	1370lm	II
ML32A-1000-20W	AC220-240V	20W	2250lm	II

ML32B

MIRROR LIGHT LED SMDInternal driver
PCPC



ML32B-500-8W



ML32B-800-12W



ML32B-1000-20W

IP54

WH

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF Flicker Free PF≥0.9 Sensor

Certification

SAA RoHS CE CB

Code	Voltage	Watt	Lumen(±5%)	Class
ML13-480-8W	AC200-240V	8W	1010lm	I
ML13-600-10W	AC200-240V	10W	1270lm	I
ML13-900-15W	AC200-240V	15W	1900lm	I



ML32C

MIRROR LIGHT LED SMD Internal driver
PCPC



ML32C-500-8W

IP54

WH

Beam Angle

120°

Code	Voltage	Watt	Lumen(±5%)	Class
ML32C-500-8W	AC220-240V	8 W	860lm	II

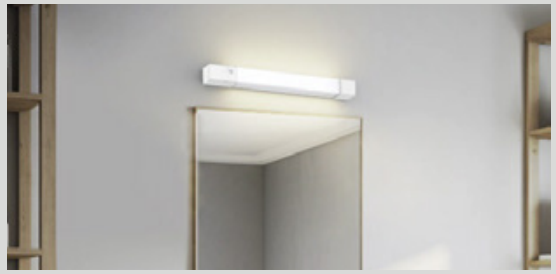

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF Flicker Free PF≥0.9 Sensor

Certification

SAA RoHS CE



ML27

MIRROR LIGHT LED SMD Internal driver
Aluminium+PC



ML27-600-12W



ML27-900-20W



ML27-1200-32W

Code	Voltage	Watt	Lumen(±5%)	Class
ML27-600-12W	AC220-240V	12W	1600lm	I
ML27-900-20W	AC220-240V	20W	2600lm	I
ML27-1200-32W	AC220-240V	32W	4000lm	I

IP54

WH BK

Beam Angle

160°x110°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DALI Flicker Free PF≥0.9

Certification

SAA RoHS CE



ML17

LED SMDInternal driver

MIRROR LIGHT PC



ML17-450-10W
ML17-450-13W

IP54

WH

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF Flicker Free PF≥0.9

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
ML17-450-10W	AC200-240V	10W	1100lm	I
ML17-450-13W	AC200-240V	13W	1420lm	I



ML35

MIRROR LIGHT

LED SMD Internal driver
Aluminium+PC PC



ML35-600-8W
ML35-600-12W



ML35-900-12W
ML35-900-15W

IP44

WH CH

Beam Angle

160°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF Flicker Free PF≥0.9

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
ML35-600-8W	AC220-240V	8W	1050lm	I
ML35-600-12W	AC220-240V	12W	1550lm	I
ML35-900-12W	AC220-240V	12W	1550lm	I
ML35-900-15W	AC220-240V	15W	1900lm	I



ML34

MIRROR LIGHT

LED SMDInternal driver
PCPC



ML34-450-6W



ML34-600-8W
ML34-600-10W



ML34-900-12W
ML34-900-15W

IP44

WH CH GD

Beam Angle

160°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF Flicker Free PF≥0.9

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
ML34-450-6W	AC220-240V	6W	830lm	I
ML34-600-8W	AC220-240V	8W	1200lm	I
ML34-600-10W	AC220-240V	10W	1400lm	I
ML34-900-12W	AC220-240V	12W	1650lm	I
ML34-900-15W	AC220-240V	15W	2100lm	I





ML31

MIRROR LIGHT LED SMD Internal driver
Aluminium PC



ML31-600-10W



ML31-900-15W

IP54

WH SR GD

Beam Angle

110°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF Flicker Free PF≥0.9

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
ML31-600-10W	AC100-240V	10W	1340lm	II
ML31-900-15W	AC100-240V	15W	2140lm	II





ML33

MIRROR LIGHT LED SMD Internal driver
Aluminium PC



ML33-450-6W



ML33-600-10W
ML33-600-12W



ML33-900-12W
ML33-900-15W

IP44

WH GD

Beam Angle

110°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF Flicker Free PF≥0.9

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
ML33-450-6W	AC220-240V	6W	600lm	I
ML33-600-10W	AC220-240V	10W	930lm	I
ML33-600-12W	AC220-240V	12W	1100lm	I
ML33-900-12W	AC220-240V	12W	1100lm	I
ML33-900-15W	AC220-240V	15W	1360lm	I





ML36

MIRROR LIGHT LED SMD Internal driver
Aluminium PC



ML36-450-8W



ML36-600-10W
ML36-600-12W



ML36-900-12W
ML36-900-15W

IP44

WH BK CH

Beam Angle

110° 110°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF Flicker Free PF≥0.9

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
ML36-450-8W	AC220-240V	8W	960lm	I
ML36-600-10W	AC220-240V	10W	1200lm	I
ML36-600-12W	AC220-240V	12W	1450lm	I
ML36-900-12W	AC220-240V	12W	1450lm	I
ML36-900-15W	AC220-240V	15W	1720lm	I





ML39

MIRROR LIGHT LED SMD Internal driver
Aluminium PC



ML39-450-6W



ML39-600-10W
ML39-600-15W



ML39-900-10W
ML39-900-15W

IP54

WH BK

Beam Angle

110° 110°x5°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF Flicker Free PF≥0.9

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
ML39-450-6W	AC220-240V	6W	610lm	I
ML39-600-10W	AC220-240V	10W	950lm	I
ML39-600-15W	AC220-240V	15W	1450lm	I
ML39-900-10W	AC220-240V	10W	950lm	I
ML39-900-15W	AC220-240V	15W	1450lm	I



ML29

MIRROR LIGHT

LED SMD Internal driver
Aluminium PC



ML29-450-6W



ML29-580-10W



ML29-860-15W

IP44

WH CH

Beam Angle

110°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF Flicker Free PF≥0.9

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
ML29-450-6W	AC220-240V	6W	720lm	I
ML29-580-10W	AC220-240V	10W	1200lm	I
ML29-860-15W	AC220-240V	15W	1850lm	I



ML43

MIRROR LIGHT LED SMDInternal driver
PCPC



ML43A-8W



ML43B-6W

IP54

WH CH

Beam Angle

360°

Light Source

CRI≥90 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Touch Flicker Free PF≥0.9

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
ML43A-8W	AC220-240V	8W	670lm	II
ML43B-6W	AC220-240V	6W	490lm	II

ML42

MIRROR LIGHT LED COB Internal driver
Aluminium PC



ML42-70-8W-D

IP54

WH CH

Beam Angle

40°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
ML42-70-8W-D	AC220-240V	8W	480lm	I



ML40

MIRROR LIGHT

LED COB Internal driver
Iron PMMA



ML40-330-5W

IP54

WH

Beam Angle

150°

Light Source

CRI≥90 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Touch Flicker Free PF≥0.9

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
ML40-330-5W	AC220-240V	5W	470lm	I



ML30

MIRROR LIGHT

LED SMD Internal driver
Aluminium PC



ML30-460-6W



ML30-580-10W

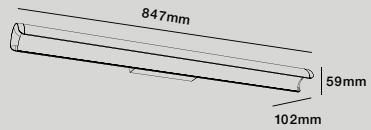

ML30-850-15W

IP40

WH CH

Beam Angle

110°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF Flicker Free PF≥0.9

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
ML30-460-6W	AC220-240V	6W	610lm	I
ML30-580-10W	AC220-240V	10W	1000lm	I
ML30-850-15W	AC220-240V	15W	1410lm	I



ML18

MIRROR LIGHT

LED SMD Internal driver
Aluminium+PC PC



ML18-580-10W



ML18-860-15W



ML18-1140-20W

IP40

WH BK

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF Flicker Free PF≥0.9

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
ML18-580-10W	AC100-240V	10W	1150lm	I
ML18-860-15W	AC100-240V	15W	1950lm	I
ML18-1140-20W	AC100-240V	20W	2430lm	I



ML01

MIRROR LIGHT

LED SMDInternal driver
Die-casting AluminiumPC



ML01-580-10W



ML01-860-15W



ML01-1140-20W

IP40

WH BK

Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF Flicker Free PF≥0.9

Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
ML01-580-10W	AC100-240V	10W	1180lm	I
ML01-860-15W	AC100-240V	15W	1950lm	I
ML01-1140-20W	AC100-240V	20W	2430lm	I

connect

IINNO Ltd
Unit 7, 8/F, Tower B
83 King Lam Street
Lai Chi Kok, Kowloon
Hong Kong
Tel: +86 (0)769 2301 0151 / 2
Email: sales@iinno-lighting.com
Web: www.iinno-lighting.com

iinno lighting